

1 Introduction

Video generation has advanced rapidly in recent years, and the frontier is now shifting from silent video synthesis to the joint generation of synchronized video and audio. Although closed-source models such as Veo 3 (Google DeepMind, 2025), Sora 2 (OpenAI, 2025), and Kling 3.0 (Kuaishou Technology, 2026) have shown impressive capabilities, open-source progress (e.g. Ovi (Low et al., 2025), LTX-2 (HaCohen et al., 2026)) in this direction remains limited. In particular, it remains challenging to build an open model that combines strong generation quality, multilingual support, and inference efficiency with a simple and scalable architecture.

In this report, we present **daVinci-MagiHuman**, an open-source audio-video generation model built to address these challenges. While leading open-source models (HaCohen et al., 2026; Wan et al., 2025; Low et al., 2025; Team et al., 2026) typically rely on heavily specialized multi-stream designs, our model adopts a single-stream Transformer that models text, video, and audio within a shared-weight backbone. This design is simple at the model architectural level and easy to optimize jointly with training and inference infrastructure, making it better suited for future research and community development.

daVinci-MagiHuman is particularly strong in human-centric generation. The model performs especially well in scenarios that require expressive character acting, natural coordination between voice and facial expression, realistic body movement, and accurate audio-video synchronization. It also generalizes well across languages, delivering strong performance in Chinese (Mandarin and Cantonese), English, Japanese, Korean, German, and French, with support for additional languages beyond these major ones.

daVinci-MagiHuman is also designed for fast inference. The single-stream architecture is both hardware-friendly and infrastructure-friendly, making inference optimization significantly easier. In addition, we accelerate generation with latent-space super-resolution, which reduces the computation required for high-resolution video generation. As a result, our distilled model can generate a 5-second 256p video in 2 seconds and a 5-second 1080p video in 38 seconds on a single H100 GPU. These results make the model suitable not only for offline content creation, but also for latency-sensitive interactive applications.

To support future research and development, we fully open-source the complete model stack, including the base model, the distilled model, the super-resolution model, and the inference codebase. We hope this release can provide the community with a practical and extensible foundation for future work on audio-video generation.

Overall, daVinci-MagiHuman provides a strong open-source foundation for audio-video generation by combining architectural simplicity, strong human-centric quality, multilingual capability, and fast inference. Its main highlights are as follows:

Simple single-stream architecture A single-stream Transformer for text, video, and audio, avoiding the complexity of heavily specialized multi-stream architectures while remaining easy to optimize together with training and inference infrastructure.

Strong human-centric generation quality Particularly strong results in expressive human generation, including natural emotion, speech-expression coordination, facial performance, body motion, and audio-video synchronization.

Broad multilingual capability Strong spoken audio-video generation across multiple languages, including Chinese (Mandarin and Cantonese), English, Japanese, Korean, German, and French, with support for additional languages beyond these major ones.

Fast inference Efficient generation enabled by the single-stream backbone, latent-space super-resolution, and inference-level optimization.

Fully open-source release The complete model stack is released, including the diffusion model, the super-resolution model, and the inference codebase.

2 Methodology

daVinci-MagiHuman is designed to balance architectural simplicity, strong generation quality, and fast inference. To achieve this, we build the model around several key design choices. In this section, we describe the main techniques behind the system.

Single-Stream Transformer Recent open-source video generation models (Wan et al., 2025; Kong et al., 2024) commonly adopt dual-stream architectures, where tokens from text and video are processed by partially separate branches and fused through cross-attention or other dedicated modules.

In audio-video generation (HaCohen et al., 2026; Low et al., 2025), this design trend becomes even stronger, since the model must handle video and audio signals with different temporal structures and semantic patterns. As a result, many models adopt separate pathways for video and audio, dedicated fusion blocks, or modality-specific

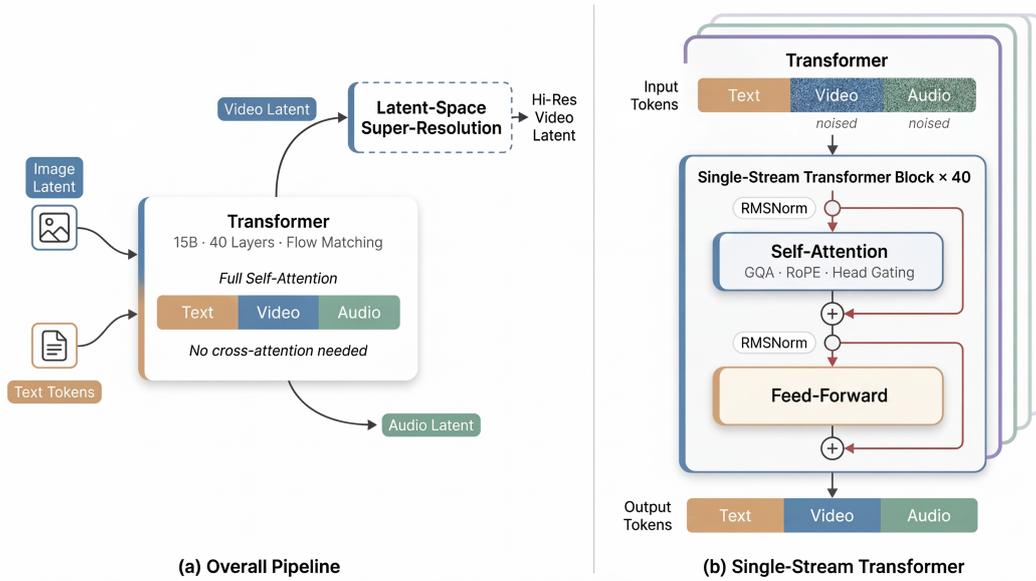


Figure 2: **Overall architecture.** (a) The base generator takes text tokens, a reference image latent, and noisy video and audio tokens as input, and jointly denoises the video and audio tokens with a single-stream Transformer. All modalities are processed within a unified token sequence using self-attention only, without separate cross-attention or fusion modules. A latent-space super-resolution stage can be further applied to refine the generated video at higher output resolutions. (b) The single-stream Transformer adopts a sandwich architecture layout: the first and last 4 layers use modality-specific projections and normalization parameters, while the middle 32 layers share the main Transformer parameters across modalities. Each block uses per-head gating in attention, and the model contains no explicit timestep embedding.

alignment modules. While such designs can be useful, they also make the overall architecture substantially more complex. This added complexity creates practical challenges beyond model design: multi-stream architectures introduce more irregular computation patterns, making implementation and optimization much harder in practice.

To address these issues, we adopt a single-stream Transformer architecture. Instead of maintaining separate pathways for different modalities, we represent text, video, and audio tokens within a shared backbone and model them using a unified stack of self-attention layers. This design keeps the architecture simple, reduces engineering complexity, and is easier to optimize jointly at both the model and infrastructure levels.

Figure 2(b) illustrates the core architecture. Our model uses a 15B-parameter, 40-layer single-stream Transformer backbone that jointly denoises video and audio at every step. Several design choices are central to its simplicity and effectiveness:

- **Sandwich Architecture Layout.** The 40-layer Transformer is not fully homogeneous. The first and last 4 layers use modality-specific projections and RMSNorm parameters, while the middle 32 layers share the main Transformer parameters across modalities. This sandwich-style layout preserves modality-sensitive processing near the input and output boundaries while keeping most computation in a common representation space for deep multimodal fusion.
- **Timestep-Free Denoising.** Unlike original DiT architectures (Peebles and Xie, 2023) that inject diffusion timestep information through explicit timestep embeddings or AdaLN conditioning, our denoiser contains no dedicated timestep pathway. Following recent observations in (Sun et al., 2025; Tang et al., 2025), the model receives the current noisy video and audio latents and infers the denoising state directly from the inputs themselves.
- **Per-Head Gating.** In each attention block, we follow the recent practice in large language models (LLMs) (Qiu et al., 2025) of introducing an additional scalar gate for every attention head and use a sigmoid to modulate the attention output before the output projection. Concretely, if o_h denotes the output of the h -th attention head and g_h is the corresponding learned gate, the gated output is

$$\tilde{o}_h = \sigma(g_h) o_h,$$

This mechanism is introduced to improve numerical stability during training and to enhance model representability, while adding only minimal architectural overhead.

- **Unified Conditioning Without Extra Modules.** We handle denoising and reference signals with a minimal unified interface rather than introducing dedicated conditioning branches. Denoising video and audio tokens, together with text and optional image conditions, are all represented in the same latent/token space and processed by the same model. This design allows us to support multiple conditioning and generation settings with a simple shared architecture instead of task-specific fusion modules.

Efficient Inference Techniques Beyond the single-stream backbone itself, we improve inference efficiency with several complementary techniques: latent-space super-resolution, a turbo video decoder, full-graph compilation and distillation.

- **Latent-Space Super-Resolution.** Directly generating high-resolution video from scratch remains expensive because the video token count grows quickly with spatial resolution. To reduce this cost, we adopt a two-stage pipeline: the base model first generates video and audio latents at a lower base resolution, and a super-resolution stage then refines the result at higher resolution. We perform this refinement in latent space rather than pixel space because it stays aligned with the native diffusion representation, reuses the same overall backbone architecture, and avoids an extra VAE decode-and-encode round trip. Concretely, we upsample the video latent with trilinear interpolation, inject additional noise, and refine it with only 5 extra denoising steps using a dedicated super-resolution checkpoint. In the 1080p setting, the super-resolution model additionally enables local attention in many layers to control high-resolution attention cost. Although the stage is primarily designed to improve the video output, it still takes audio latent tokens as input and predicts video and audio jointly within the same backbone. In practice, only the video latent is explicitly updated during the super-resolution sampling step, while the audio latent from the base stage is reused in a noised form as auxiliary input. This design keeps the refinement process coupled to the audio signal, which is especially useful when the base-resolution video is very coarse and lip synchronization would otherwise be harder to preserve.
- **Turbo VAE Decoder.** We use Wan2.2 VAE (Wan Team, 2025) for encoding because of its high spatial-temporal compression ratio, while replacing the original video decoder at inference time with a lightweight re-trained Turbo VAE decoder (Zou et al., 2026). This substantially reduces decoding overhead and is important because decoding lies on the critical path of both the base generator and the super-resolution pipeline.
- **Full-Graph Compilation.** We further integrate MagiCompiler, our full-graph PyTorch compiler, into the inference stack. By fusing operators across Transformer layer boundaries and consolidating distributed communication into fewer collective calls, it provides around 1.2× speedup on H100.
- **Distillation.** To reduce cost in inference, we apply DMD-2 (Yin et al., 2024) to distill the base generator. As a result, the distilled model can generate with only 8 denoising steps without CFG, while maintaining strong generation quality. Unless otherwise specified, the latency numbers reported in Section 3 use this distilled model.

3 Evaluation

We compare daVinci-MagiHuman with two leading open-source baselines, Ovi 1.1 (Low et al., 2025) and LTX 2.3 (HaCohen et al., 2026). Our evaluation covers three aspects: automatic quality metrics, pairwise human preference, and inference efficiency.

Table 1: Quantitative Analysis of Ovi-1.1, LTX-2.3, and daVinci-MagiHuman.

Model	VIDEO QUALITY SCORE			AUDIO QUALITY SCORE
	Visual Quality ↑	Text Alignment ↑	Physical Consistency ↑	WER ↓
OVI 1.1	4.73	4.10	4.41	40.45%
LTX 2.3	4.76	4.12	4.56	19.23%
daVinci-MagiHuman	4.80	4.18	4.52	14.60%

Quantitative Quality Benchmark We first report quantitative quality results against Ovi 1.1 and LTX 2.3. For video quality, we evaluate on VerseBench (Wang et al., 2025) and adopt VideoScore2 (He et al., 2025) to measure visual quality, text alignment, and physical consistency. For audio quality, we evaluate speech intelligibility on TalkVid-Bench (Chen et al., 2025) using word error rate (WER), where lower is better. All generated audio is transcribed by GLM-ASR (Z.AI, 2025). For CJK languages, we compute WER at the character level to avoid inconsistencies from word segmentation.

As shown in Table 1, daVinci-MagiHuman achieves the best visual quality and text alignment scores among the compared models, while also obtaining the lowest WER of 14.60%. This substantially outperforms Ovi 1.1 (40.45%) and also improves over LTX 2.3 (19.23%). LTX 2.3 performs best on physical consistency, but daVinci-MagiHuman remains competitive on this metric and achieves the strongest overall balance across visual and audio quality.

Table 2: Time breakdown (in seconds) for generating a 5-second video at different resolutions. All results are measured on a single H100 GPU. The base stage uses the distilled model, and all decode times are measured with the Turbo VAE decoder.

Resolution	Base	SR	Decode	Total
256P	1.6	–	0.4	2.0
540P	1.6	5.1	1.3	8.0
1080P	1.6	31.0	5.8	38.4

Human Evaluation We further conduct a pairwise human evaluation against two open-source audio-video models: Ovi 1.1 (Low et al., 2025) and LTX 2.3 (HaCohen et al., 2026). A total of 10 human raters each judge 200 randomized pairs, including 100 comparisons against each competitor, for a total of 2,000 comparisons. Raters select the preferred clip or declare a tie based on overall audio-video quality, synchronization, and naturalness.

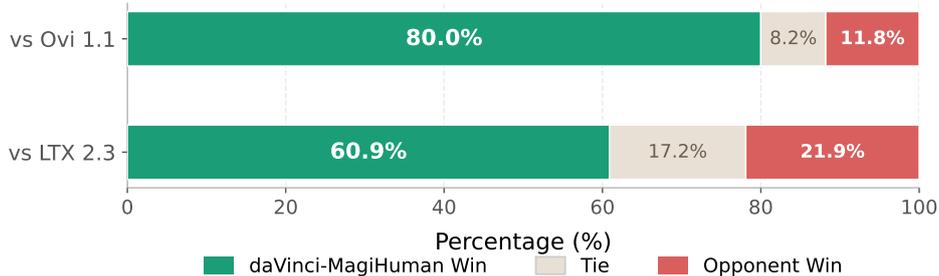


Figure 3: **Human evaluation results.** Pairwise preference rates of daVinci-MagiHuman against two open-source audio-video generation models, aggregated over 10 raters and 2,000 comparisons.

As shown in Figure 3, daVinci-MagiHuman is consistently preferred over both baselines, achieving win rates of 80.0% against Ovi 1.1 and 60.9% against LTX 2.3. The corresponding opponent win rates are 11.8% and 21.9%, with tie rates of 8.2% and 17.2%, respectively. Overall, these results indicate a clear human preference for daVinci-MagiHuman across the tested pairwise comparisons.

Inference Efficiency We finally evaluate inference efficiency from the end-to-end latency perspective. Table 2 provides a stage-wise breakdown on a single H100 GPU. In these measurements, the base stage always runs at 256p using the distilled model, while higher output resolutions are obtained through the super-resolution stage and decoding is performed with the Turbo VAE decoder. As a result, the base-stage latency remains constant across output resolutions, and the additional cost at higher resolutions is dominated by super-resolution and decoding. Even so, the entire pipeline takes only 38.4 seconds to produce a 5-second 1080p video.

References

- [1] Shunian Chen, Hejin Huang, Yexin Liu, Zihan Ye, Pengcheng Chen, Chenghao Zhu, Michael Guan, Rongsheng Wang, Junying Chen, Guanbin Li, Ser-Nam Lim, Harry Yang, and Benyou Wang. 2025. [Talkvid: A large-scale diversified dataset for audio-driven talking head synthesis](#).
- [2] Google DeepMind. 2025. [Vevo 3 technical report](#). Technical report.
- [3] Yoav HaCohen, Benny Brazowski, Nisan Chiprut, Yaki Bitterman, Andrew Kvochko, Avishai Berkowitz, Daniel Shalem, Daphna Lifschitz, Dudu Moshe, Eitan Porat, et al. 2026. Ltx-2: Efficient joint audio-visual foundation model. *arXiv preprint arXiv:2601.03233*.
- [4] Xuan He, Dongfu Jiang, Ping Nie, Minghao Liu, Zhengxuan Jiang, Mingyi Su, Wentao Ma, Junru Lin, Chun Ye, Yi Lu, et al. 2025. Videoscore2: Think before you score in generative video evaluation. *arXiv preprint arXiv:2509.22799*.
- [5] Weijie Kong, Qi Tian, Zijian Zhang, Rox Min, Zuozhuo Dai, Jin Zhou, Jiangfeng Xiong, Xin Li, Bo Wu, Jianwei Zhang, et al. 2024. Hunyuanvideo: A systematic framework for large video generative models. *arXiv preprint arXiv:2412.03603*.
- [6] Kuaishou Technology. 2026. [Kling 3.0](#). AI video and audio generation model.
- [7] Chetwin Low, Weimin Wang, and Calder Katyal. 2025. Ovi: Twin backbone cross-modal fusion for audio-video generation. *arXiv preprint arXiv:2510.01284*.
- [8] OpenAI. 2025. [Sora 2 is here](#).
- [9] William Peebles and Saining Xie. 2023. Scalable diffusion models with transformers. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 4195–4205.
- [10] Zihan Qiu, Zekun Wang, Bo Zheng, Zeyu Huang, Kaiyue Wen, Songlin Yang, Rui Men, Le Yu, Fei Huang, Suozhi Huang, et al. 2025. Gated attention for large language models: Non-linearity, sparsity, and attention-sink-free. *arXiv preprint arXiv:2505.06708*.
- [11] Qiao Sun, Zhicheng Jiang, Hanhong Zhao, and Kaiming He. 2025. Is noise conditioning necessary for denoising generative models? *arXiv preprint arXiv:2502.13129*.
- [12] Bingda Tang, Boyang Zheng, Sayak Paul, and Saining Xie. 2025. Exploring the deep fusion of large language models and diffusion transformers for text-to-image synthesis. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 28586–28595.
- [13] OpenMOSS Team, Donghua Yu, Mingshu Chen, Qi Chen, Qi Luo, Qianyi Wu, Qinyuan Cheng, Ruixiao Li, Tianyi Liang, Wenbo Zhang, et al. 2026. Mova: Towards scalable and synchronized video-audio generation. *arXiv preprint arXiv:2602.08794*.
- [14] Team Wan, Ang Wang, Baole Ai, Bin Wen, Chaojie Mao, Chen-Wei Xie, Di Chen, Feiwu Yu, Haiming Zhao, Jianxiao Yang, et al. 2025. Wan: Open and advanced large-scale video generative models. *arXiv preprint arXiv:2503.20314*.
- [15] Wan Team. 2025. [Wan2.2: More powerful, more beautiful](#).
- [16] Duomin Wang, Wei Zuo, Aojie Li, Ling-Hao Chen, Xinyao Liao, Deyu Zhou, Zixin Yin, Xili Dai, Daxin Jiang, and Gang Yu. 2025. Universe-1: Unified audio-video generation via stitching of experts. *arXiv preprint arXiv:2509.06155*.
- [17] Tianwei Yin, Michaël Gharbi, Taesung Park, Richard Zhang, Eli Shechtman, Fredo Durand, and William T Freeman. 2024. Improved distribution matching distillation for fast image synthesis. *Advances in neural information processing systems*, 37:47455–47487.
- [18] Z.AI. 2025. Glm-asr: Glm-asr-nano-2512. <https://github.com/zai-org/GLM-ASR>. GitHub repository, accessed 2026-03-22.
- [19] Ya Zou, Jingfeng Yao, Siyuan Yu, Shuai Zhang, Wenyu Liu, and Xinggang Wang. 2026. Turbo-vaed: Fast and stable transfer of video-vaes to mobile devices. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, pages 14086–14094.

A Authors

The authors are listed in alphabetical order, excluding the project leaders.

Ethan Chern
Hansi Teng
Hanwen Sun
Hao Wang
Hong Pan
Hongyu Jia
Jiadi Su
Jin Li
Junjie Yu
Lijie Liu
Lingzhi Li
Lyumanshan Ye
Min Hu
Pengfei Liu
Qiangang Wang

Quanwei Qi
Steffi Chern
Tao Bu
Taoran Wang
Teren Xu
Tianning Zhang
Tiantian Mi
Weixian Xu
Wenqiang Zhang
Wentai Zhang
Xianping Yi
Xiaojie Cai
Xiaoyang Kang
Yan Ma
Yixiu Liu

Yue Cao
Yunbo Zhang
Yunpeng Huang
Yutong Lin
Zewei Tao
Zhaoliang Liu
Zheng Zhang
Zhiyao Cen
Zhixuan Yu
Zhongshu Wang
Zhulin Hu
Zijin Zhou
Zinan Guo

Project Leader

Yue Cao, Pengfei Liu