

Training-Free Halving of Activated Experts in Fine-Grained Mixture-of-Experts Models

Xing Chen*, Hengshuai Yao

Abstract

Modern fine-grained Mixture-of-Experts (MoE) models route each token to a small number of experts and renormalize their router probabilities. We show that this renormalization implicitly calibrates expert output gain to the training top- k : reducing k at inference changes not only which experts are used but also the strength of the expert branch. We separate these effects by activating the top k_1 experts while normalizing by the probability mass of the top k_2 experts, introducing one integer with no parameters, training, or measurable compute overhead. On Qwen3.6-35B-A3B, reducing from 8 to 4 experts causes a 4.65-point MMLU drop under standard renormalization but only 0.35 points with $k_2 = 16$, while halving routed-expert compute. The result replicates on the $11\times$ larger Qwen3.5-397B-A17B, where reducing from 10 to 5 experts loses only 0.55 points with an appropriate reference set. Removing renormalization entirely is catastrophic, showing that preserving a suitable reference mass is crucial. We further find that perplexity and downstream accuracy favor different k_2 , cautioning against selecting MoE compression settings using unlabeled text alone. Analyses also show that expert identity matters substantially more than expert weighting, while balanced and domain-specialized routing leaves limited room for expert pruning.

Introduction

Sparse Mixture-of-Experts (MoE) architectures decouple parameter count from per-token compute by activating only a few of many expert sub-networks (Shazeer et al. 2017; Lepikhin et al. 2021; Fedus, Zoph, and Shazeer 2022). Recent open-weight models have pushed this design toward *fine-grained* sparsity: rather than 8 or 16 large experts, they use hundreds of small ones and route each token to a handful of them (Dai et al. 2024; DeepSeek-AI 2024; Qwen Team 2025). In Qwen3.6-35B-A3B, our primary object of study, all 40 layers are MoE layers with 256 experts each and $k=8$ selected per token; the routed experts hold 32.2B of the model’s 35.9B parameters (89.6%), while each token touches only 3.1% of them.

This memory-compute asymmetry—all experts must be resident, few are used—is what makes MoE compression attractive and awkward at the same time. Reducing the number of experts (pruning or merging) saves memory but not

compute, since k is unchanged; reducing k saves compute but not memory. A large body of training-free work attacks the memory side by identifying and removing redundant experts (Lu et al. 2024; Li et al. 2024). The compute side, by contrast, is usually treated as trivially adjustable: k is an inference-time argument, so one simply lowers it, renormalizes over the survivors, and measures the loss (Chitty-Venkata et al. 2025). The loss is large, and the reported remedies are training-based—retraining with sampled expert counts, or distilling a half-expert student (Wang et al. 2025; Gu et al. 2025; Lv et al. 2026).

We argue this treatment overlooks a detail that turns out to dominate the outcome. Nearly all modern MoE implementations renormalize the selected router probabilities, $w_i = p_i / \sum_{j \in \mathcal{T}_k} p_j$, so that the mixture weights sum to one. In a coarse-grained router this is nearly a no-op, because the top few probabilities already carry most of the mass. In a fine-grained router it is not: in the model we study, the top-8 of 256 probabilities sum to only 0.182, so renormalization multiplies them by 5.5 on average. That amplification is not a free-standing design choice—it is a quantity the model was trained under, and it is a function of k . Lowering k from 8 to 4 while keeping the renormalization discards four experts *and* redistributes their weight onto the survivors, inflating the expert branch’s contribution to the residual stream beyond anything the model saw in training. The measured degradation of “top-4” therefore conflates two effects: the loss of four experts, and a gain miscalibration that has nothing to do with expert capacity.

Our contribution is to separate them, using the observation that the numerator and the denominator of the renormalization need not use the same expert set. We activate the top k_1 experts but normalize by the mass of the top k_2 :

$$w_i = \frac{p_i}{\sum_{j \in \mathcal{T}_{k_2}} p_j}, \quad i \in \mathcal{T}_{k_1},$$

where k_1 controls compute and k_2 controls gain. Setting $k_2=k_1$ recovers standard renormalization; $k_2=E$ removes it; $k_2=k$ anchors the gain to the trained value; and $k_2 > k$ pushes the gain below its trained value, adaptively per token. Only k_1 expert FFNs are ever evaluated, and the router already computes all E probabilities, so varying k_2 costs nothing measurable.

The empirical payoff is large, and it is largest exactly

*Correspondence: raincchio@gmail.com

where prior practice reports the reduction of k as unaffordable. On 2000-question, 5-shot MMLU with paired McNemar testing, activating 4 of 256 experts per layer instead of 8—halving routed-expert compute—costs 4.65 accuracy points under standard renormalization ($p=1.7\times 10^{-9}$), but only 0.35 points at $k_2=16$ ($p=0.66$), which the paired test cannot distinguish from the top-8 baseline. The same experiment on Qwen3.5-397B-A17B, an $11\times$ larger model with 512 experts and $k=10$, gives 2.10 points at $k_2=k_1=5$ versus 0.55 points at $k_2=10$ ($p=0.24$).

We summarize our findings as follows.

- **The renormalization reference set is a free variable.** Lowering k without decoupling the denominator conflates capacity loss with gain miscalibration. Decoupling it is a one-line change that makes it possible to halve the number of activated experts with no statistically detectable MMLU loss on two models spanning $11\times$ in scale.
- **The gain, not the weights, is what breaks.** Removing renormalization entirely ($k_2=E$) costs 27.5 MMLU points and 356% perplexity, so the model is not indifferent to weight magnitudes; and with k_1 held fixed, both shrinking and enlarging the reference set away from its optimum degrade the model. The damage is specific to the reference set being wrong, and it is two-sided.
- **Which experts, not how much.** With the number of activated experts held fixed at 8, replacing the router’s weights with uniform ones costs +49.7% perplexity, while sampling experts instead of taking the argmax costs +310% and random selection +1667%. Expert *identity* is worth several times more than expert *weighting*, which rules out approximate or stochastic routing on this model but is precisely what makes a cheap global gain correction viable.
- **Perplexity picks the wrong operating point.** On the 35B model perplexity is minimized at $k_2=8$ and MMLU at $k_2=16$; the perplexity-optimal setting is significantly worse on MMLU (−1.10 points, $p=0.021$). Selecting compression hyperparameters on unlabeled text is not safe here, and we recommend paired significance testing on a downstream task.
- **Expert pruning has less headroom than this.** The router is well balanced with essentially no dead experts, and its specialization is strongly domain-dependent: WikiText and code top-64 expert sets overlap at 0.164, below the 0.250 random baseline, so domain-pruned models do not transfer and the union of two domains’ top-128 sets already covers 198 of 256 experts.

All results are obtained without any training, distillation, or fine-tuning.

Related Work

Sparse MoE language models. Conditional computation via learned routing dates to Shazeer et al. (2017), and was scaled to modern transformers by GShard (Lepikhin et al. 2021) and Switch Transformer (Fedus, Zoph, and Shazeer 2022), which also documented the training instabilities that

motivate auxiliary load-balancing losses (Zoph et al. 2022). Alternatives to token-choice top- k routing include expert-choice routing (Zhou et al. 2022). Open-weight decoder MoEs such as Mixtral (Jiang et al. 2024) use coarse granularity (8 experts, top-2), whereas DeepSeekMoE (Dai et al. 2024) argued for many small experts plus always-on shared experts, a design adopted by DeepSeek-V3 (DeepSeek-AI 2024) and the Qwen3 series (Qwen Team 2025), and pushed further by He (2024). Our objects of study belong to this fine-grained family, and the effect we describe is a direct consequence of fine granularity: it is the flatness of a 256-way router’s top- k mass that makes the renormalization gain large and thus makes miscalibrating it expensive.

Analyses of learned routing. Several studies have asked whether experts specialize semantically. OpenMoE (Xue et al. 2024) reported context-independent, largely token-identity-driven routing, and Lo et al. (2024) analyzed routing behavior across layers in open MoE models. Our routing measurements are consistent with the general picture that routers are well balanced, but we reach a sharper conclusion on specialization for this model: the domain effect exceeds a within-domain resampling noise floor by nearly four orders of magnitude, and cross-domain expert overlap falls *below* chance. We also separate layers by attention type—both models interleave linear-attention and full-attention layers in a 3:1 pattern—and find the two classes behave differently, a grouping that prior analyses of homogeneous architectures had no reason to consider.

Training-free MoE compression. Expert pruning removes experts judged redundant (Lu et al. 2024) and merging consolidates them using routing statistics (Li et al. 2024); Lasby et al. (2025) report near-lossless one-shot pruning at 50% expert reduction with a router-weighted criterion. These target memory, as does quantization (Frantar et al. 2023; Lin et al. 2024), which suits MoE well since the routed experts are a large homogeneous block; Huang et al. (2025) combine both in a training-free pipeline. On the compute side the closest method to ours is LEXI (Chitty-Venkata et al. 2025), which picks a per-layer number of active experts data-free—and renormalizes the surviving router weights, which in our parameterization is $k_2=k_1$, precisely the setting we find worst on both models. The two compose: LEXI decides *how many* experts a layer keeps, the reference set decides *how strongly* the survivors drive the residual stream. More generally, we are not aware of prior work that scans the renormalization denominator separately from k , and prior top- k reduction numbers on fine-grained models are, for this reason, likely to be pessimistic. Some architectures do expose a related knob—GLM-style configurations ship a `routed_scaling_factor` applied after renormalization—but as a fixed scalar chosen at training time.

Changing k after training. That MoE models degrade sharply when the number of activated experts is altered at inference is well documented—Wang et al. (2025) call the degradation “precipitous”—and the reported remedies are *training-based*: retraining with randomly sampled expert

	Qwen3.6 35B-A3B	Qwen3.5 397B-A17B
Layers (all MoE)	40	60
Hidden size	2048	4096
Experts per layer E	256	512
Trained k	8	10
Expert interm. size	512	1024
Shared experts	1	1
Top- k router mass	0.182	0.192
Renorm. gain	$5.50\times$	$5.22\times$
Act. expert params, native	1.132 B	8.305 B
at $k_1 = 0.75k/0.8k$	0.881 B	6.795 B
at $k_1 = 0.5k$	0.629 B	4.530 B

Table 1: The two models. “Act. expert params” counts routed experts activated per token plus the always-on shared expert, summed over layers. Router mass and gain are measured on WikiText.

counts (Wang et al. 2025), training expert combinations so that k can be scaled up (Gu et al. 2025), null experts that let the effective k vary per token (Zeng et al. 2024), and, closest to our headline result, self-distilling a post-trained MoE that skips roughly half its experts (Lv et al. 2026). That last work also argues, as we do, that renormalizing the surviving weights inflates the effective scale of the expert residual branch relative to what pre-training calibrated. Our contribution relative to it is twofold: our correction needs no training, and we find the choice is not the binary “renormalize or do not”—those are the endpoints $k_2=k_1$ and $k_2=E$ of a family whose useful settings are interior. Which endpoint is less wrong depends on the model’s native forward pass: for a model that does not renormalize, not renormalizing preserves the trained gain, whereas both models here renormalize by construction and removing it costs 27.45 MMLU points. The invariant is not a rule about renormalization but the reference set.

Background and Setup

Models. We study two fine-grained MoE models from the same series but very different scales (Table 1). Qwen3.6-35B-A3B has 40 layers, hidden size 2048, and 256 routed experts of intermediate size 512 per layer with $k=8$, plus one always-on shared expert per layer modulated by a learned scalar gate; every layer is an MoE layer. Qwen3.5-397B-A17B has 60 layers, hidden size 4096, and 512 routed experts of intermediate size 1024 with $k=10$. Both interleave linear-attention (gated delta-net style) and full-attention blocks in a repeating 3:1 pattern. For the 35B model we enumerated tensors in the released checkpoint: routed experts hold 89.6% of all parameters (32.212B of 35.952B; the remainder is 2.448B of attention, embeddings, shared experts and norms, a 0.845B multi-token-prediction head, and a 0.447B vision tower). Each token activates 8+1 of 256 experts per layer, i.e. 3.1% of expert parameters—a 32:1 memory-to-compute asymmetry that organizes the rest of this paper.

Router and the implicit gain. For hidden state x at a given layer, the router computes $p = \text{softmax}(W_g x)$ over all E experts, selects the index set $\mathcal{T}_k$ of the k largest entries, and forms the layer output

$$y = \sum_{i \in \mathcal{T}_k} w_i E_i(x) + g_{\text{sh}} E_{\text{sh}}(x), \quad w_i = \frac{p_i}{\sum_{j \in \mathcal{T}_k} p_j}. \quad (1)$$

The denominator is what concerns us. Write $m_k(x) = \sum_{j \in \mathcal{T}_k} p_j$ for the retained probability mass. Renormalization multiplies the raw probabilities by $1/m_k(x)$, and since m_k increases with k , this gain is implicitly tied to the k used in training. We measure $\mathbb{E}[m_8] = 0.182$ on WikiText and 0.170 on code for the 35B model, i.e. average amplifications of $5.50\times$ and $5.87\times$; for the 397B model $\mathbb{E}[m_{10}] = 0.192$, i.e. $5.22\times$. Dropping to $k=4$ reduces m_k and hence *raises* the gain applied to the surviving experts, pushing the expert branch out of the regime the model was trained in. This is the miscalibration we correct.

Method: decouple the reference set. We keep the selection rule and the numerator, and replace only the denominator’s index set:

$$w_i = \frac{p_i}{\sum_{j \in \mathcal{T}_{k_2}} p_j}, \quad i \in \mathcal{T}_{k_1}, \quad (2)$$

with $\mathcal{T}_{k_1} \subseteq \mathcal{T}_{k_2}$ when $k_2 \geq k_1$. The parameterization is a strict generalization of common practice:

- $k_2 = k_1$: standard renormalization (Eq. 1);
- $k_2 = k$ (trained value): the gain is anchored to what training calibrated;
- $k_2 = E$: no renormalization at all, since $\sum_j p_j = 1$;
- $k_2 > k$: gain below the trained value, applied per token.

The weights no longer sum to one when $k_2 > k_1$; they sum to $m_{k_1}(x)/m_{k_2}(x) < 1$, which is a *per-token, input-adaptive* down-scaling rather than a constant. Averaged over tokens this ratio is 0.854 for $(k_1, k_2)=(6, 8)$ and 0.592 for $(6, 16)$ on the 35B model, so the discrete grid we scan spans the range a tuned global scalar would explore, without introducing a continuous hyperparameter.

Only k_1 expert FFNs are evaluated, so the compute saving is exactly that of reducing k to k_1 . The extra cost of a larger k_2 is a wider top- k over router logits that are computed for all E experts anyway—negligible against k_1 expert FFNs. Both are implemented by replacing the router’s forward at inference time; no weights are modified.

Evaluation protocol. Perplexity is measured on 100K-token samples of WikiText-103 (Merity et al. 2017) and a Python subset of CodeParrot (Tunstall, von Werra, and Wolf 2022), at a 2048-token context, with a held-out WikiText split (drawn beyond row 400,000, disjoint from the tuning split) used to check that the choice of k_2 does not overfit. All configurations are scored on byte-identical token chunks. Downstream accuracy is measured on MMLU (Hendrycks et al. 2021): 2000 questions sampled with a fixed seed from all 14,042 questions across all 57 subjects, 5-shot, scored

by comparing the logits of the single tokens A–D; on C-Eval (Huang et al. 2023) (1300 questions, 5-shot, Chinese); and, as a generation task, on GSM8K (Cobbe et al. 2021) (500 questions, 0-shot, greedy to 512 tokens, reasoning disabled via the chat template, exact-match on the final number). All configurations run on *identical* question sets, compared to the baseline with a paired McNemar test (McNemar 1947). Pairing is not optional at these effect sizes: a power analysis at $n=2000$ gives a minimum detectable difference of 0.98% paired versus 3.04% unpaired, and our effects are 0.3–5%.

How the Router Actually Behaves

Before modifying the router we characterize it, using forward hooks on all gates to record the selected expert indices and softmax weights over 500K tokens per domain (WikiText and code), giving an expected 15,680 activations per expert per layer on the 35B model.

Load is well balanced; there is no obvious fat to cut. Normalized activation entropy is 0.889 (WikiText) and 0.915 (code), with Gini coefficients of 0.581 and 0.492. The number of never-activated experts per layer has median 0 and maximum 1 across all layers and both domains. The 397B model behaves similarly (entropy 0.911, Gini 0.527, dead experts median 1 of 512). Figure 1(b) shows the resulting retention curves: keeping the top 50% of experts per layer retains only 88.8% (WikiText) and 81.3% (code) of routing mass, and the worst layer retains just 64.2%. A router trained with load-balancing pressure leaves little slack for pruning, which is the first reason we look elsewhere for compute savings.

Experts are strongly domain-specialized. Comparing per-layer expert distributions across domains yields a mean Jensen–Shannon divergence of 0.258 nats. To calibrate this we estimate a noise floor by multinomial resampling within a domain at matched counts, obtaining 3.2×10^{-5} nats; the observed divergence is roughly $8,200\times$ the floor, so it is not a sampling artifact. More strikingly, the top-64 expert sets of the two domains overlap at 0.164, *below* the random baseline of 0.250: the domains do not merely prefer different experts, they actively avoid each other’s. Specialization increases with depth (Figure 1(a)), from 0.135 nats at layer 0 to 0.338 at layer 39.

But specialization does not make pruning transferable. Pruning to the top-128 experts using code-derived rankings retains 81.3% of code routing mass; using WikiText-derived rankings retains only 38.0% on the same domain—a factor of two. Meanwhile the union of the two domains’ top-128 sets covers 198 of 256 experts. Strong specialization is thus a double-edged result: it licenses *domain-specific* pruned models, but it forecloses a single general-purpose pruned model, because any expert set broad enough to serve both domains is barely smaller than the original.

Attention type structures routing. Grouping layers by attention type reveals structure that a layer-agnostic average hides. Full-attention layers share expert preferences

Routing rule	WikiText		Code	
	PPL	Δ	PPL	Δ
top- k (native)	6.64	—	2.59	—
top- k , uniform w	9.95	+49.7%	3.11	+20.3%
sampled without repl.	27.22	+310%	6.09	+135%
uniformly random	117.39	+1667%	18.69	+623%

Table 2: Routing ablations at fixed compute (8 experts activated in every row) on Qwen3.6-35B-A3B. Replacing the router’s weights with uniform ones is far less damaging than replacing its *choices*.

with each other (cross-layer top-64 overlap 0.309 versus the 0.250 random baseline), whereas linear-attention layers are mutually near-independent (0.258), and cross-type pairs are indistinguishable from chance (0.251). The shared-expert gate follows the same split: mean 0.178 on full-attention layers versus 0.151 on linear-attention layers, rising with depth to 0.405 at layer 39. We report this as a caution for routing analyses of the increasingly common hybrid-attention architectures: layers are not interchangeable samples.

Expert Selection Matters More Than Expert Weighting

If a global correction to the router weights is to work, the model must be more sensitive to expert selection than to the precise weight values. We test this directly with three ablations that all keep the number of activated experts at exactly 8, so compute is held constant (Table 2).

Discarding the router’s weights entirely but keeping its choices costs +49.7% perplexity on WikiText. Keeping the router’s distribution but sampling from it instead of taking the argmax costs +310%, and choosing experts uniformly at random costs +1667%. Selection is worth roughly six times more than weighting on both domains.

This has two consequences. Negatively, it rules out a family of efficiency methods on this model: approximate top- k , locality-sensitive-hashing routers, and any scheme that injects stochasticity into selection will be catastrophic, because exact argmax is effectively a hard requirement. Positively, it is what makes our method plausible. Since the model tolerates substantial distortion of the weight *magnitudes* as long as the selected set is right, correcting the systematic component of that distortion is enough—and reducing k_1 produces exactly a systematic, not idiosyncratic, magnitude error.

The Reference Set Controls the Damage

The router’s top- k mass is small. Table 3 reports the mean softmax mass by rank on the 35B model. The single highest-scoring expert receives only 0.046 of the probability mass, the top-8 together only 0.182, and even the top-32 only 0.380. The distribution is remarkably flat, as one would expect from a 256-way router trained with load balancing. Renormalization therefore performs a $5.50\times$ amplification, and that factor is a property of $k=8$.

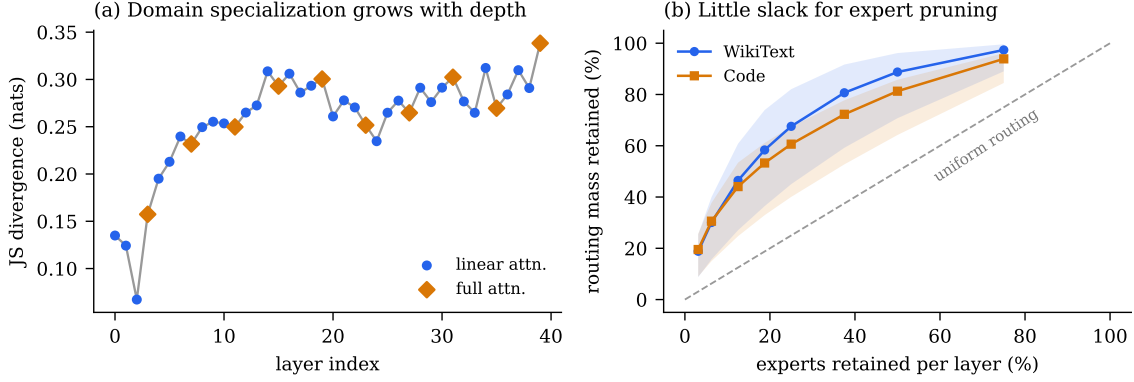


Figure 1: Routing structure of Qwen3.6-35B-A3B measured over 500K tokens per domain. (a) Cross-domain (WikiText vs. code) Jensen–Shannon divergence of the per-layer expert distribution rises with depth; full-attention layers are marked separately. (b) Fraction of routing mass retained when keeping only the top- N experts per layer; shaded bands span the best and worst layer. Even keeping half the experts loses 11–19% of routing mass, and the worst layer far more.

Domain	rank 1	top-4	top-6	top-8	top-16
WikiText	0.046	0.122	0.155	0.182	0.262
Code	0.046	0.116	0.146	0.170	0.245

Table 3: Cumulative router softmax mass by rank on Qwen3.6-35B-A3B, averaged over tokens and layers. The top-8 of 256 experts carry under a fifth of the total mass, so the renormalization in Eq. 1 applies a large, k -dependent gain.

Both extremes of the reference set are harmful. Two observations bracket the effect. Removing renormalization altogether ($k_2=E=256$) at $k_1=6$ raises WikiText perplexity from 6.64 to 30.29 (+356%) and drops MMLU by 27.45 points; the model depends on the amplification rather than merely tolerating it. At the other extreme, shrinking the reference set along with k_1 ($k_2=k_1$) costs +4.08% perplexity and 2.60 MMLU points at $k_1=6$, and 4.65 MMLU points at $k_1=4$. Between them, k_2 in the range $[k, 2k]$ recovers nearly all of it. Perplexity as a function of k_2 is thus U-shaped with an interior minimum, and MMLU is inverted-U with an interior maximum (Figure 2); neither optimum sits at an end-point of the scanned grid.

Perplexity. Table 4 gives the perplexity scan. On the 35B model at $k_1=6$, standard renormalization costs +4.08%, while $k_2=8$ yields -1.61% —slightly *better* than the native top-8 baseline while activating 22% fewer expert parameters. The held-out WikiText split, disjoint from the split used to choose k_2 , reproduces the ranking exactly (-0.57% at $k_2=8$), as does code (+0.68%), so the choice is not an artifact of the tuning split. The 397B model shows the same ordering at $k_1=8$, with $k_2=10$ the best of the grid on all three corpora (WikiText, held-out, and code). Across both models and all six corpus/model combinations, perplexity is minimized at k_2 equal to the model’s trained k and degrades monotonically as k_2 moves away in either direction.

Configuration	WikiText	Held-out	Code
<i>Qwen3.6-35B-A3B</i> (trained $k=8$, $E=256$)			
$k_1=8$ native	6.643	6.986	2.585
$k_1=6$, $k_2=6$	+4.08%	+4.69%	+1.72%
$k_1=6$, $k_2=8$	-1.61%	-0.57%	+0.68%
$k_1=6$, $k_2=16$	+1.81%	+1.42%	+3.29%
$k_1=6$, $k_2=32$	+23.25%	+19.04%	+13.00%
$k_1=6$, $k_2=256$	+356%	+313%	+158%
<i>Qwen3.5-397B-A17B</i> (trained $k=10$, $E=512$)			
$k_1=10$ native	4.159	3.198	2.249
$k_1=8$, $k_2=8$	+1.06%	+1.54%	+0.42%
$k_1=8$, $k_2=10$	+0.46%	+0.56%	+0.34%
$k_1=8$, $k_2=20$	+4.98%	+4.95%	+2.18%
$k_1=8$, $k_2=40$	+17.18%	+18.11%	+6.87%
$k_1=8$, $k_2=512$	+128%	+146%	+56.04%

Table 4: Perplexity relative to the native baseline (absolute PPL in the native rows). Held-out is a WikiText split disjoint from the split used to choose k_2 . Perplexity is minimized at k_2 equal to the trained k on both models and all three corpora.

Downstream Validation

Perplexity on 100K tokens is weak evidence for a claim about model capability. We therefore validate on MMLU under the paired protocol described earlier (Table 5), and confirm the conclusion on a generation task (GSM8K) and a Chinese benchmark (C-Eval) below.

Halving activated experts is free, if the denominator is not halved too. Activating 4 of 8 experts on the 35B model costs 4.65 points under standard renormalization but 0.35 at $k_2=16$, with a near-symmetric flip distribution (99/92); activating 5 of 10 on the 397B model costs 2.10 points at $k_2=k_1$ but 0.55 at $k_2=10$ ($p=0.24$). The reference set recovers 4.30 and 1.55 points at identical compute. A non-significant result is not proof of equivalence—the paired design only bounds any residual loss below the

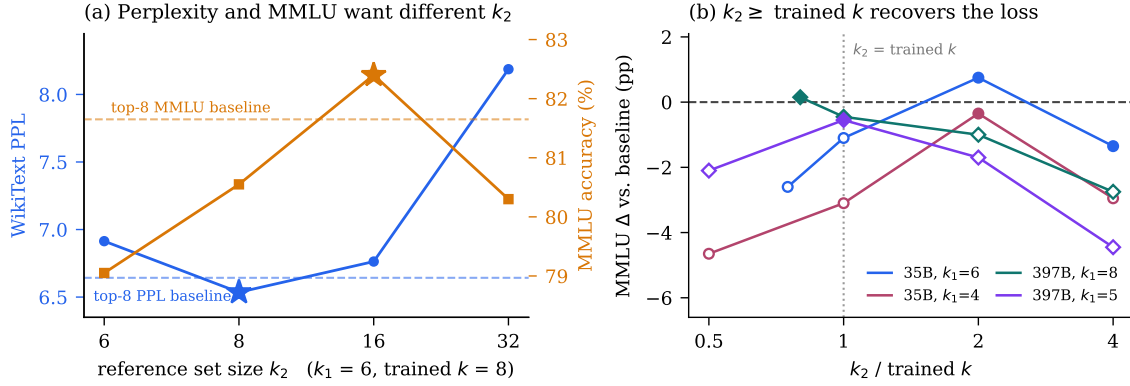


Figure 2: (a) WikiText perplexity (blue, left) and MMLU accuracy (orange, right) as a function of the reference set size k_2 at $k_1=6$ on Qwen3.6-35B-A3B; stars mark the optima, dashed lines the native top-8 baselines. The two metrics disagree: perplexity is minimized at $k_2=8$, MMLU at $k_2=16$. (b) MMLU change versus k_2/k for both models at two values of k_1 each; hollow markers are significant at $p < 0.05$ under a paired McNemar test, filled markers are not. Shrinking the reference set together with k_1 (leftmost point of each curve) is significantly harmful in three of four settings; $k_2 \geq k$ recovers it. The $k_2=E$ endpoint is off-scale and omitted.

0.98-point resolution at $n=2000$.

The optimal k_2 is model-dependent, and lies in $[k, 2k]$. The 35B model prefers $k_2=2k$ at both k_1 we tried; the 397B model prefers $k_2=k$; neither prefers $k_2=k_1$ once the cut is deep. We therefore do not propose a universal value but that k_2 be scanned over $\{k_1, k, 2k\}$ whenever k_1 is reduced. The consistent finding is the negative one: $k_2=k_1$, every implementation’s default, is the worst choice in that grid.

The ablation structure matters. Had we evaluated only the baseline and our final candidate—common practice—the 35B result would read as “top-4 is simply lossless” and attribute nothing to the reference set; only the $k_2=k_1$ row shows the reduction is damaging by default. Conversely, the 397B $k_1=8$ block, where the default is already fine (+0.15), shows the opposite: reporting only that row would conclude renormalization never matters.

Perplexity picks a significantly worse operating point. On the 35B model perplexity is minimized at $k_2=8$ but MMLU at $k_2=16$ (Figure 2(a)): the perplexity-optimal setting is significantly worse on MMLU (−1.10 points, $p=0.021$), and the MMLU-optimal one +1.81% worse on perplexity. Since selecting k_2 on unlabeled text is exactly the cheap protocol one would reach for, we regard this as the main methodological finding—compression settings chosen on perplexity alone should be treated as unvalidated. This sharpens the known pattern that pruned LLMs retain perplexity while degrading on knowledge tasks (Jaiswal et al. 2024): here the two metrics are not merely of different sensitivity but optimized at different points, so perplexity mis-ranks configurations.

Generation: the effect survives autoregressive decoding. A single-token multiple-choice score cannot reveal damage that accumulates over a generated sequence, so we repeat the experiment on GSM8K (Table 6). The pattern matches

MMLU, and is if anything sharper. Reducing to $k_1=k/2$ under standard renormalization costs 6.60 points (35B) and 4.20 (397B)—larger than the corresponding MMLU losses, as expected if a miscalibrated gain compounds token by token—both highly significant. Anchoring the reference set to the native k erases the loss: $k_1=4$, $k_2=16$ costs 0.60 points (35B, $p=0.68$) and $k_1=5$, $k_2=10$ costs 0.80 (397B, $p=0.34$), neither detectable. The truncation rate tracks the accuracy loss closely—it reaches 10.4% at the worst 35B setting and falls to 1.4% once the reference set is corrected—so the default reduction does not merely change answers but degrades the model into unterminated outputs.

C-Eval: insensitivity is model-specific, not benchmark-specific. On C-Eval (1300 Chinese questions, 5-shot) the 35B model shows no significant difference for *any* configuration, including the default reduction ($k_1=6$, $k_2=6$: +0.23, $p=0.80$; $k_1=4$, $k_2=8$: −0.77, $p=0.31$; baseline 83.92%). Read alone, this benchmark would license the default reduction that MMLU and GSM8K reject. Yet the same benchmark on the 397B model rejects it: $k_1=8$, $k_2=8$ loses 2.92 points ($p<10^{-4}$; baseline 88.31%), and anchoring to the native k recovers most of it ($k_1=8$, $k_2=10$: −1.00; $k_1=5$, $k_2=10$: −0.77, $p=0.20$). The recovery direction is consistent with every other result—anchoring helps, $k_2=k_1$ is worst—but a benchmark’s *sensitivity* to the intervention is not a property of the benchmark alone: the very C-Eval that certifies the default reduction on one model refutes it on another. Validating on a single (benchmark, model) pair risks certifying an artifact of that pair—our perplexity caution, one level up.

Cost accounting. On the 35B model, halving k_1 from 8 to 4 cuts routed-expert compute in half (1.006B to 0.503B activated routed parameters per token) and the total expert term by 44% (1.132B to 0.629B), a 17% end-to-end reduction against the ~ 3.0 B parameters per token—though the expert

Configuration	Acc.	Δ (pp)	flips $-/+$	McNemar p
<i>Qwen3.6-35B-A3B</i> , $n=2000$				
$k_1=8$ native	81.65%	—	—	—
$k_1=6, k_2=6$	79.05%	-2.60	82 / 30	9.3×10^{-7}
$k_1=6, k_2=8$	80.55%	-1.10	53 / 31	0.021
$k_1=6, k_2=16$	82.40%	+0.75	74 / 89	0.27
$k_1=6, k_2=256$	54.20%	-27.45	637 / 88	10^{-103}
$k_1=4, k_2=4$	77.00%	-4.65	166 / 73	1.7×10^{-9}
$k_1=4, k_2=8$	78.55%	-3.10	97 / 35	6.4×10^{-8}
$k_1=4, k_2=16$	81.30%	-0.35	99 / 92	0.66
<i>Qwen3.5-397B-A17B</i> , $n=2000$				
$k_1=10$ native	89.45%	—	—	—
$k_1=8, k_2=8$	89.60%	+0.15	23 / 26	0.78
$k_1=8, k_2=10$	89.00%	-0.45	28 / 19	0.24
$k_1=8, k_2=20$	88.45%	-1.00	46 / 26	0.024
$k_1=5, k_2=5$	87.35%	-2.10	78 / 36	1.0×10^{-4}
$k_1=5, k_2=10$	88.90%	-0.55	42 / 31	0.24
$k_1=5, k_2=20$	87.75%	-1.70	64 / 30	5.9×10^{-4}
$k_1=5, k_2=512$	70.90%	-18.55	410 / 39	10^{-79}

Table 5: MMLU, 5-shot, greedy, paired McNemar test against each model’s native baseline. “flips” counts questions the baseline answered correctly and the variant did not, versus the reverse. Bold rows halve or nearly halve activated routed experts and are statistically indistinguishable from the baseline.

term dominates weight traffic during memory-bound decoding. Memory is unchanged (all E experts stay resident), so this is a pure compute-side lever, orthogonal to quantization.

Discussion

Practical recommendation. When compute or decode bandwidth binds, decouple the reference set from the activation count whenever k is changed and scan $k_2 \in \{k_1, k, 2k\}$ with paired testing: one integer, three evaluations, and the difference between a significant 2–5 point MMLU regression and none. It is also a control for any published top- k reduction result, which absent a decoupled k_2 overstates the cost of reducing k .

Why we do not recommend expert pruning here. Structural compression looks like the harder path on this architecture: the router is well balanced with essentially no dead experts, retention falls off quickly (Figure 1(b)), and specialization is domain-bound, so a general-purpose pruned model has almost no room (198/256 experts in the two-domain union). Since the routed experts are homogeneous and 89.6% of parameters, quantization looks better matched to the memory problem and composes with our compute-only method. This claim rests on activation-mass retention and cross-domain transfer; it does not contradict the near-lossless single-domain pruning of Lasby et al. (2025).

Limitations. Both models are from the same series; though they differ by $11\times$ in parameters and in depth, expert count, and trained k , cross-architecture generalization remains a hypothesis. The mechanism predicts the effect

Configuration	Acc.	Δ (pp)	McNemar p	trunc.
<i>Qwen3.6-35B-A3B</i> , $n=500$				
$k_1=8$ native	95.00%	—	—	2.8%
$k_1=6, k_2=6$	92.80%	-2.20	0.027	6.0%
$k_1=6, k_2=8$	95.00%	+0.00	1.00	2.2%
$k_1=4, k_2=4$	88.40%	-6.60	10^{-6}	10.4%
$k_1=4, k_2=16$	94.40%	-0.60	0.68	1.4%
<i>Qwen3.5-397B-A17B</i> , $n=500$				
$k_1=10$ native	96.60%	—	—	2.6%
$k_1=8, k_2=8$	94.60%	-2.00	0.006	3.8%
$k_1=8, k_2=10$	96.20%	-0.40	0.63	2.2%
$k_1=5, k_2=5$	92.40%	-4.20	10^{-5}	7.0%
$k_1=5, k_2=10$	95.80%	-0.80	0.34	1.6%

Table 6: GSM8K, 0-shot, greedy decoding, paired McNemar test against each model’s native baseline. “trunc.” is the fraction of generations that reach the 512-token limit without emitting an answer. Bold rows halve the activated experts with no detectable loss; the default reduction ($k_2=k_1$) is significantly worse and truncates more often.

scales with router flatness, so coarse-grained MoEs (e.g. 8 experts, top-2) should benefit little; a preliminary check on a third architecture (Appendix A) is consistent but ran under an earlier scalar parameterization and is not directly comparable. Our corpora are English and Python only, long-context is untested, and the perplexity-optimal k_2 is already domain-dependent. Downstream we cover multiple-choice (MMLU, C-Eval) and short-form generation (GSM8K) but not long-form generation. Finally, we scan k_2 over a geometric grid; a finer grid, or a per-layer or per-domain k_2 , may do better.

Conclusion

Training-free reduction of activated experts in a fine-grained MoE is usually presented as a compute/accuracy trade-off. We showed it is confounded by an implicit variable: renormalization applies a gain calibrated to the trained k , and lowering k shrinks the denominator with the activation count, silently miscalibrating the expert branch. Decoupling the two—activate k_1 experts, normalize by the top- k_2 mass—turns a 4.65 point MMLU regression at half the activated experts into 0.35 points (35B) and a 2.10 point regression into 0.55 points (397B), for one integer and no measurable compute. Because perplexity and downstream accuracy select different reference sets, this knob should be validated on a downstream task with paired testing, not on perplexity.

References

- Chitty-Venkata, K. T.; Madireddy, S.; Emani, M.; and Vishwanath, V. 2025. LEXI: Layer-Adaptive Active Experts for Efficient MoE Model Inference. *arXiv preprint arXiv:2509.02753*.
- Cobbe, K.; Kosaraju, V.; Bavarian, M.; Chen, M.; Jun, H.; Kaiser, L.; Plappert, M.; Tworek, J.; Hilton, J.; Nakano, R.; Hesse, C.; and Schulman, J. 2021. Training Verifiers to Solve Math Word Problems.

- Dai, D.; Deng, C.; Zhao, C.; Xu, R. X.; Gao, H.; Chen, D.; et al. 2024. DeepSeekMoE: Towards Ultimate Expert Specialization in Mixture-of-Experts Language Models. In *Proceedings of the Annual Meeting of the Association for Computational Linguistics (ACL)*.
- DeepSeek-AI. 2024. DeepSeek-V3 Technical Report. *arXiv preprint arXiv:2412.19437*.
- Fedus, W.; Zoph, B.; and Shazeer, N. 2022. Switch Transformers: Scaling to Trillion Parameter Models with Simple and Efficient Sparsity. *Journal of Machine Learning Research*, 23(120): 1–39.
- Frantar, E.; Ashkboos, S.; Hoefler, T.; and Alistarh, D. 2023. GPTQ: Accurate Post-Training Quantization for Generative Pre-trained Transformers. In *International Conference on Learning Representations (ICLR)*.
- Gu, N.; Zhang, Z.; Feng, Y.; Chen, Y.; Fu, P.; Lin, Z.; Wang, S.; Sun, Y.; Wu, H.; Wang, W.; and Wang, H. 2025. Elastic MoE: Unlocking the Inference-Time Scalability of Mixture-of-Experts. *arXiv preprint arXiv:2509.21892*.
- He, X. O. 2024. Mixture of A Million Experts. *arXiv preprint arXiv:2407.04153*.
- Hendrycks, D.; Burns, C.; Basart, S.; Zou, A.; Mazeika, M.; Song, D.; and Steinhardt, J. 2021. Measuring Massive Multitask Language Understanding. In *International Conference on Learning Representations (ICLR)*.
- Huang, W.; Liao, Y.; Liu, J.; He, R.; Tan, H.; Zhang, S.; Li, H.; Liu, S.; and Qi, X. 2025. Mixture Compressor for Mixture-of-Experts LLMs Gains More. In *International Conference on Learning Representations (ICLR)*.
- Huang, Y.; Bai, Y.; Zhu, Z.; Zhang, J.; Zhang, J.; Su, T.; Liu, J.; Lv, C.; Zhang, Y.; Lei, J.; Fu, Y.; Sun, M.; and He, J. 2023. C-Eval: A Multi-Level Multi-Discipline Chinese Evaluation Suite for Foundation Models. In *Advances in Neural Information Processing Systems (NeurIPS)*.
- Jaiswal, A.; Gan, Z.; Du, X.; Zhang, B.; Wang, Z.; and Yang, Y. 2024. Compressing LLMs: The Truth is Rarely Pure and Never Simple. In *International Conference on Learning Representations (ICLR)*.
- Jiang, A. Q.; Sablayrolles, A.; Roux, A.; Mensch, A.; Savary, B.; Bamford, C.; et al. 2024. Mixtral of Experts. *arXiv preprint arXiv:2401.04088*.
- Lasby, M.; Lazarevich, I.; Sinnadurai, N.; Lie, S.; Ioannou, Y.; and Thangarasa, V. 2025. REAP the Experts: Why Pruning Prevails for One-Shot MoE Compression. *arXiv preprint arXiv:2510.13999*.
- Lepikhin, D.; Lee, H.; Xu, Y.; Chen, D.; Firat, O.; Huang, Y.; Krikun, M.; Shazeer, N.; and Chen, Z. 2021. GShard: Scaling Giant Models with Conditional Computation and Automatic Sharding. In *International Conference on Learning Representations (ICLR)*.
- Li, P.; Zhang, Z.; Yadav, P.; Sung, Y.-L.; Cheng, Y.; Bansal, M.; and Chen, T. 2024. Merge, Then Compress: Demystify Efficient SMOE with Hints from Its Routing Policy. In *International Conference on Learning Representations (ICLR)*.
- Lin, J.; Tang, J.; Tang, H.; Yang, S.; Chen, W.-M.; Wang, W.-C.; Xiao, G.; Dang, X.; Gan, C.; and Han, S. 2024. AWQ: Activation-aware Weight Quantization for On-Device LLM Compression and Acceleration. In *Proceedings of Machine Learning and Systems (MLSys)*.
- Lo, K. M.; Huang, Z.; Qiu, Z.; Wang, Z.; and Fu, J. 2024. A Closer Look into Mixture-of-Experts in Large Language Models. *arXiv preprint arXiv:2406.18219*.
- Lu, X.; Liu, Q.; Xu, Y.; Zhou, A.; Huang, S.; Zhang, B.; Yan, J.; and Li, H. 2024. Not All Experts Are Equal: Efficient Expert Pruning and Skipping for Mixture-of-Experts Large Language Models. In *Proceedings of the Annual Meeting of the Association for Computational Linguistics (ACL)*.
- Lv, X.; Sheng, L.; Zhang, K.; You, Y.; Gao, S.; Luo, X.; Zuo, Y.; Fan, Y.; Yang, J.; Cui, G.; Wang, B.; Yang, F.; Sun, Y.; Ding, N.; and Zhou, B. 2026. Post-Trained MoE Can Skip Half Experts via Self-Distillation. *arXiv preprint arXiv:2605.18643*.
- McNemar, Q. 1947. Note on the Sampling Error of the Difference between Correlated Proportions or Percentages. *Psychometrika*, 12(2): 153–157.
- Merity, S.; Xiong, C.; Bradbury, J.; and Socher, R. 2017. Pointer Sentinel Mixture Models. In *International Conference on Learning Representations (ICLR)*.
- Qwen Team. 2025. Qwen3 Technical Report. *arXiv preprint arXiv:2505.09388*.
- Shazeer, N.; Mirhoseini, A.; Maziarz, K.; Davis, A.; Le, Q.; Hinton, G.; and Dean, J. 2017. Outrageously Large Neural Networks: The Sparsely-Gated Mixture-of-Experts Layer. In *International Conference on Learning Representations (ICLR)*.
- Tunstall, L.; von Werra, L.; and Wolf, T. 2022. CodeParrot: A GPT-2 model trained to generate Python code. <https://huggingface.co/datasets/codeparrot/codeparrot-clean>.
- Wang, Y.; Hu, Q.; Ding, Y.; Wang, R.; Gong, Y.; Jiao, J.; Shen, Y.; Cheng, P.; and Su, J. 2025. Training Matryoshka Mixture-of-Experts for Elastic Inference-Time Expert Utilization. *arXiv preprint arXiv:2509.26520*.
- Xue, F.; Zheng, Z.; Fu, Y.; Ni, J.; Zheng, Z.; Zhou, W.; and You, Y. 2024. OpenMoE: An Early Effort on Open Mixture-of-Experts Language Models. *arXiv preprint arXiv:2402.01739*.
- Zeng, Z.; Miao, Y.; Gao, H.; Zhang, H.; and Deng, Z. 2024. AdaMoE: Token-Adaptive Routing with Null Experts for Mixture-of-Experts Language Models. In *Findings of the Association for Computational Linguistics: EMNLP*.
- Zhou, Y.; Lei, T.; Liu, H.; Du, N.; Huang, Y.; Zhao, V.; Dai, A.; Chen, Z.; Le, Q.; and Laudon, J. 2022. Mixture-of-Experts with Expert Choice Routing. In *Advances in Neural Information Processing Systems (NeurIPS)*.
- Zoph, B.; Bello, I.; Kumar, S.; Du, N.; Huang, Y.; Dean, J.; Shazeer, N.; and Fedus, W. 2022. ST-MoE: Designing Stable and Transferable Sparse Expert Models. *arXiv preprint arXiv:2202.08906*.

Appendix A: A Third Architecture

Before adopting the k_1/k_2 parameterization we ran a preliminary study on Gemma-4-26B-A4B (30 layers, 128 experts, top-8). It used a global scalar gain $w_i = \alpha \cdot p_i/m_{k_1}(x)$ —a fixed, rather than per-token, version of the correction studied above—and a different evaluation protocol, so its numbers are not directly comparable to the main results and we report them as directional evidence only. They are nonetheless informative on two points: whether a scalar gain helps on a third architecture, and whether the flatness mechanism predicts the size of the effect.

The scalar gain helps but does not fully recover. On MMLU ($n=1000$, 5-shot, chat template, instruction-tuned variant, baseline 80.40%), reducing to $k_1=6$ at the native $\alpha=1$ costs 2.30 points (Table 7). Scanning α recovers up to 1.00 point: the best value $\alpha=0.80$ reaches -1.30 ($p=0.079$), the only non-significant setting, but unlike the two Qwen models it does not return all the way to the baseline. As on Qwen, the “natural” guess $\alpha=m_6/m_8=0.86$ is not the empirical optimum.

Configuration	Acc.	Δ (pp)	McNemar p
$k_1=8$ native	80.40%	—	—
$k_1=6$, $\alpha=1.00$	78.10%	−2.30	0.0018
$k_1=6$, $\alpha=0.90$	78.60%	−1.80	0.015
$k_1=6$, $\alpha=0.85$	78.60%	−1.80	0.020
$k_1=6$, $\alpha=0.80$	79.10%	−1.30	0.079
$k_1=6$, $\alpha=0.75$	78.80%	−1.60	0.033

Table 7: Gemma-4-26B-A4B, MMLU $n=1000$, scalar-gain scan (preliminary protocol). Only $\alpha=0.80$ is not significantly worse than the baseline.

The amplitude degree of freedom is untrained on all three models. Gemma exposes two learnable scale parameters in its router. The pre-softmax temperature `router.scale` was trained hard: it moved from its initialization of 1.0 to a near-constant 32.06 ± 0.02 across all 30 layers (an effective gain of $32.06 \cdot 2816^{-1/2} \approx 0.60$ on the RMSNorm-scaled logits). The post-selection amplitude `per_expert.scale`, by contrast, stayed at its initialization: all 3840 values are 1.000 ± 0.011 , essentially untouched, because it is mathematically redundant with each expert’s `down_proj` and the gradient flows to the larger-magnitude weights instead. The amplitude—the exact quantity our k_2 controls—is therefore a degree of freedom that training never optimized on any of the three models we examined: Qwen exposes no such parameter, Gemma has one but left it at 1.0, and GLM-style configurations set it by hand. This strengthens rather than weakens the main claim: we are not correcting an already-optimized quantity but filling a gap the training procedure leaves open.

The flatness mechanism predicts the effect size. The mechanism in the main text predicts the effect should scale with router flatness. Gemma’s top-8 router mass is 0.302 versus 0.182 for Qwen3.6-35B-A3B, i.e. a renormalization gain of $3.31\times$ rather than $5.50\times$. Correspondingly the gain

is far less load-bearing: on the base variant, removing renormalization entirely at $k_1=6$ ($k_2=E$) raises WikiText perplexity only from 9.158 to 9.224 (+0.7%), and is in fact *better* than standard renormalization at the same k_1 (9.318)—whereas the identical intervention costs +356% on Qwen. The selection-over-weighting result also replicates: with the eight activated experts fixed, uniform weights cost +34.4% WikiText perplexity, sampling +218%, and random selection +2436%. A matched k_1/k_2 replication on this architecture remains future work.

A protocol caution. Gemma is a reasoning model whose base and instruction-tuned variants must be evaluated differently: the instruction-tuned variant scores WikiText perplexity of 573 under plain completion but 9.6 for the base variant, because bare completion triggers degenerate repetition. All Gemma perplexity numbers above use the base variant; the MMLU scan uses the instruction-tuned variant under its chat template. This protocol dependence is the same one noted in Appendix B.

Appendix B: Reproducibility Notes

Infrastructure. All experiments use PyTorch with the HuggingFace Transformers library; the method is a drop-in replacement of the router’s `forward`, and no weights are modified. We verified that the router computation is numerically identical across Transformers versions 5.3–5.14 (only variable names changed), reproducing the WikiText baseline perplexity exactly. Qwen3.6-35B-A3B runs in bf16 on a single 98 GB accelerator (~ 72 GB resident); Qwen3.5-397B-A17B is sharded across the machine (~ 752 GB in bf16). All routing and downstream configurations are inference-only.

Protocol pitfalls. Several protocol details changed our results by more than the effects we set out to measure, and we record them for others. An initial 0-shot, per-option-loglikelihood MMLU protocol scored the 35B baseline at 53%—implausible for a model of this size—and standard 5-shot single-letter scoring restored it to 81.65%; conclusions drawn under the first protocol would have been meaningless. The model emits reasoning traces spontaneously even under plain completion formatting, which exhausts the token budget on generation tasks unless thinking is explicitly disabled via the chat template. The released generation config defaults to sampling, which must be disabled for paired comparison. Evaluation protocol must be matched to model form, a failure that produced the Gemma perplexity anomaly discussed in Appendix A and that we initially misattributed to a framework bug. And, as noted, unpaired testing at $n=2000$ cannot resolve differences below 3%, larger than most effects reported here.