

# VoxMem: Benchmarking Multimodal Memory in Large Audio Language Models

Yang Xiao<sup>1</sup> Vidhyasaharan Sethu<sup>2</sup> Eun-Jung Holden<sup>1</sup> Ting Dang<sup>1</sup>

<sup>1</sup>University of Melbourne

<sup>2</sup>University of New South Wales

## Abstract

Spoken conversational systems must recover information from prior interactions (i.e., memory), yet relevant information in speech extends beyond what was said to who said it, how it was spoken, and what was audible, information that exists only in the audio signal and cannot be recovered from a transcript. Beyond what to remember, memory also demands diverse operations: retrieving a single fact, integrating evidence across turns, tracking an evolving state. Real interactions further unfold across sessions, meaning information accumulates across distinct episodes rather than a single continuous recording. Existing benchmarks fall short on all three dimensions: they focus primarily on lexical content, adopt limited and ad hoc memory operations, and treat memory as a single-session problem. We argue that principled memory evaluation requires jointly characterizing the acoustic evidence to be retained and the operations applied to it, and introduce a taxonomy along these two axes. Building on this taxonomy, we present VoxMem: 3,196 evaluation instances over 34,743 spoken sessions (177 hours) crossing four acoustic evidence types (speech semantics, speaker identity, paralinguistic cues, environmental sound) with four memory operations (information extraction, multi-session reasoning, temporal tracking, and answer refusal), grounded in multi-session histories and stratified across context budgets from 8K to 64K tokens. Evaluating 15 LALMs, no model exceeds 40% at 32K. Models retain *what* was said far better than *who* said it, *how*, or *what* was audible, a gap that widens for complex operations, grows with history length, and manifests as qualitatively distinct failure modes across evidence types. VoxMem aims to provide a foundation to measure and drive progress on the full scope of spoken conversational memory.



Code [github.com/swagshaw/voxmembench](https://github.com/swagshaw/voxmembench)



Data [huggingface.co/datasets/AudioMemory/voxmembench](https://huggingface.co/datasets/AudioMemory/voxmembench)

## 1 Introduction

Large audio language models (LALMs) have rapidly advanced natural spoken interaction, increasingly enabling dialogue systems that span extended, multi-session conversations (Chu et al., 2023; Tang et al., 2024; Ghosh et al., 2025; Wu et al., 2025). A fundamental requirement for such systems is long-term memory: the ability to accumulate information across past interactions and ground present responses in that history. One approach is long-context scaling: expanding the context window so that longer dialogue histories can be processed directly (Kim et al., 2025; Lin et al., 2024; He et al., 2026; Ghosh et al., 2026). While conceptually straightforward, providing a longer history does not guarantee that the model can reliably retrieve and use the information it contains. As interaction histories grow, whether information is accurately retrieved and used across sessions becomes essential for evaluating spoken conversational memory and guiding future memory systems.

**Existing benchmarks lack a principled taxonomy of audio memory and cover only a narrow range of spoken-memory capabilities.** As summarized in Table 1, prior benchmarks assess linguistic content and selected acoustic cues, but rarely test whether models can remember *who* spoke, *how* they spoke, or *what* was audible in the environment. Along a second dimension, they provide only limited and fragmented coverage of memory operations, including retrieval, evidence integration, temporal tracking, and recognizing insufficient evidence (Wu et al., 2024; Ren et al., 2026; Wu et al., 2026). Consequently, the acoustic evidence and memory operations assessed by existing benchmarks are selected in an ad hoc manner, rather than derived from a unified and principled account of spoken memory. Without a taxonomy that jointly characterizes the acoustic evidence to be remembered and the memory operations, acoustic memory cannot be evaluated systematically.

**Table 1. Comparison of spoken-memory benchmarks across evidence grounding, memory evaluation, controlled scaling, and history structure.** *Answer-critical acoustic evidence* indicates whether answering a question requires different acoustic information. IE, MSR, TET, and AR denote the memory operations defined in Section 3.1. *Prov.* denotes evidence provenance; *Mono.* and *Dial.* denote monologue and dialogue, respectively.

| Benchmark                                 | Evidence Grounding                | Memory Evaluation               | Controlled Scaling |                   | History Structure |             |
|-------------------------------------------|-----------------------------------|---------------------------------|--------------------|-------------------|-------------------|-------------|
|                                           | Answer-critical Acoustic Evidence | Memory Operations IE/MSR/TET/AR | Prov.              | Reported Length   | Type              | Multi-Sess. |
| AudioMarathon (He et al., 2025)           | ⊙                                 | IE                              | ✗                  | 90–300 s          | Mono.             | ✗           |
| LongSpeech (Yang et al., 2026)            | ⊙                                 | IE                              | ✗                  | ~10 min           | Mono.             | ✗           |
| VoiceGiraffe (Ye et al., 2026)            | ⊙                                 | IE/MSR                          | ✗                  | 55.2 min avg.     | Mono.             | ✗           |
| SpokenWOZ (Si et al., 2023)               | ✗                                 | IE/MSR                          | ✗                  | —                 | Dial              | ✗           |
| ContextDialog (Kim et al., 2025)          | ✗                                 | IE                              | ✓                  | —                 | Dial              | ✗           |
| MTalk-Bench (Du et al., 2025)             | ⊙                                 | IE/MSR                          | ✗                  | —                 | Dial              | ✗           |
| Audio MultiChallenge (Gosai et al., 2026) | ⊙                                 | MSR/TET                         | ✗                  | 8+ min            | Dial              | ✗           |
| Vox-Infinity (Cheng et al., 2026)         | ⊙                                 | IE/MSR                          | ✓                  | ~23 min           | Dial/Mono         | ✗           |
| <b>VoxMem (Ours)</b>                      | ✓                                 | <b>IE/MSR/TET/AR</b>            | ✓                  | <b>2.5–20 min</b> | <b>Dial</b>       | ✓           |


**Cross-session memory, the ability to retain and relate information across distinct conversational episodes, remains insufficiently characterized in existing spoken-language evaluations.** As shown in Table 1, existing benchmarks primarily evaluate isolated recordings, and recently have begun to consider continuous dialogues. Yet real human–machine spoken interactions unfold across separate sessions, with changing topics, contexts, and temporal gaps (Maharana et al., 2024; Kim et al., 2025). This setting requires models to retrieve and relate evidence dispersed across a long, heterogeneous history, for example, linking recurring speakers to prior statements and tracking updates across sessions (Jang et al., 2023; Maharana et al., 2024; Wu et al., 2026). Whether LALMs can sustain such persistent recall as interaction histories grow remains open. Moreover, benchmarks that analyze history length typically compare different questions at different lengths (He et al., 2025; Cheng et al., 2026), confounding history length with question difficulty and evidence type.

To address these gaps, we introduce VoxMem, a benchmark for evaluating spoken conversational memory across two complementary axes: *acoustic evidence*, specifying what must be recovered from the interaction history, and *memory operation*, specifying how that information must be used. Specifically, VoxMem spans four memory operations: information extraction (Wu et al., 2024; Ren et al., 2026), multi-session reasoning, temporal evolution tracking, and answer refusal, and four information types: speech semantics, speaker identity, paralinguistic cues, and environmental sound. Established under the multi-session setting, we curate VoxMem with extensive quality control, comprising 3,196 evaluation instances over 34,743 spoken sessions (177 hours). To enable controlled evaluation as context length scales, it spans four context budgets from 8K to 64K tokens.

Across 15 LALMs, none exceeds 40% overall accuracy at 32K: models retain *what* was said far better than *who* said it, *how*, or *what* was audible. Accuracy declines as history grows across all evidence types, and error modes differ qualitatively across categories. Our contributions are:

- **Taxonomy.** A principled taxonomy of spoken conversational memory that jointly characterizes the acoustic evidence to be remembered and the operations.
- **Benchmark.** VoxMem, a multi-session benchmark of 3,196 quality-controlled instances, stratified across four context budgets (8K–64K tokens) for controlled study of context length.
- **Evaluation.** A systematic evaluation of 15 LALMs revealing structured failures in acoustic memory, with gaps that vary by evidence type, memory operation, and context length.
- **Analysis.** Fine-grained error analysis showing that failure modes differ qualitatively across question types, pointing to distinct underlying deficiencies rather than a shared bottleneck.

These findings suggest that reliable spoken conversational memory requires more than longer audio contexts, and we provide the taxonomy and benchmark to measure and address these gaps.

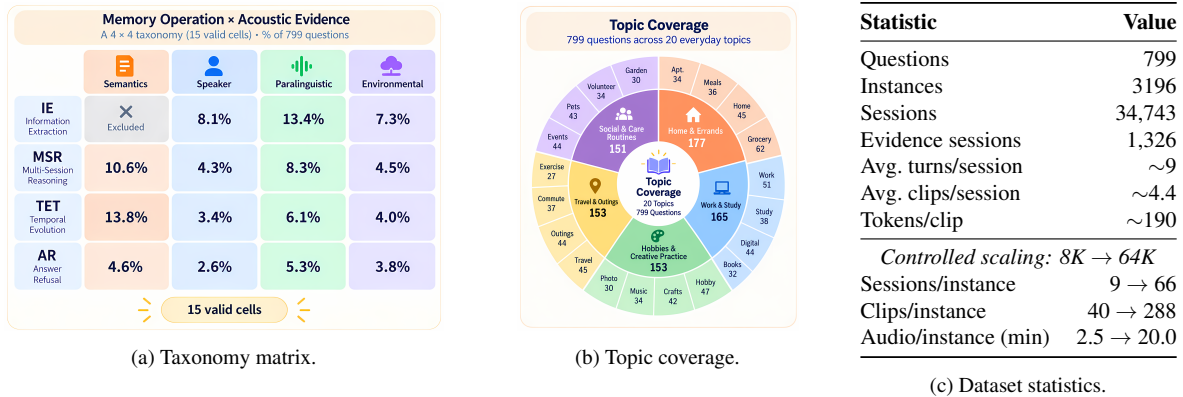

**Figure 1. Overview of the VoxMem benchmark.** (a) Memory operations and acoustic evidence form a  $4 \times 4$  taxonomy with 15 valid combinations; percentages indicate the fraction of the 799 questions in each cell. (b) The benchmark covers 20 everyday topics, grouped into five broader categories. (c) Dataset-scale statistics and controlled context expansion from 8K to 64K.

## 2 Related Work

**Acoustic evidence and memory operations.** Spoken memory requires retaining information across two dimensions, acoustic evidence such as who said something, how it was said, and what could be heard, and memory operations including retrieval, evidence integration, temporal tracking, etc. Existing spoken benchmarks cover both dimensions only partially and ad hoc (Table 1): SpokenWOZ and ContextDialog (Si et al., 2023; Kim et al., 2025) test only on lexical content of what was said, and others (He et al., 2025; Yang et al., 2026; Ye et al., 2026; Du et al., 2025; Gosai et al., 2026; Cheng et al., 2026) cover only a few selected acoustic evidence, while testing only on retrieval and integration. As a result, they mainly evaluate memory for what was said rather than for the audio, and such heterogeneous evaluations make it hard to tell whether failures arise from a particular evidence type (e.g., whether lexical failures extend to audio (Xiao et al., 2026)), a memory operation, or their interaction. VoxMem fills this gap with a principled two-dimensional taxonomy spanning four evidence types and four memory operations, evaluated across all valid combinations.

**From single-session to multi-session spoken memory.** Spoken assistants interact with users across temporally separated sessions in which speakers recur and earlier states are updated, so their memory must be evaluated over multi-session histories. All benchmarks in Table 1 instead use a long-form single recording or dialogue per instance. Long-form benchmarks ask about one extended recording (Ahia et al., 2025; He et al., 2025; Luo et al., 2026; Yang et al., 2026; Ye et al., 2026), measuring understanding of the given audio rather than retention across interactions. Conversational benchmarks test recall within one continuous dialogue (Kim et al., 2025; Si et al., 2023; Deng et al., 2025; Du et al., 2025; Gosai et al., 2026) of three to eight turns in Audio MultiChallenge. Multi-session histories pose an additional challenge absent from single-session settings: they contain competing sessions on the same topic with different details and many unrelated sessions, requiring a model to locate and bind target evidence rather than rely on topic matching (Jang et al., 2023). VoxMem is, to our knowledge, the first spoken benchmark built on multi-session histories, constructed from evidence, competing, and unrelated sessions across 20 topic families, and evaluated with each question held fixed across context lengths to isolate the effect of history length.

## 3 The VoxMem Benchmark

VoxMem establishes a two-dimensional framework for spoken conversational memory evaluation and contributes a benchmark dataset designed to probe both axes systematically.

### 3.1 Two-dimensional Taxonomy

As shown in Figure 1(a), we define a two-dimensional taxonomy spanning *acoustic evidence* and *memory operations*. *Memory operations* capture how remembered information must be used to answer a later question, and *acoustic evidence*

specifies what must be remembered from past speech: what was said (speech semantics), who said it (speaker identity), how it was said (paralinguistic cues), or what could be heard (environmental sound).

**Acoustic Evidence.** The acoustic evidence dimension probes memory across four aspects of spoken interaction, capturing not only what was said but the full richness of the spoken signal. *Speech semantics* targets memory for *what* was said, such as facts, quantities, plans, preferences, decisions, and explicit updates. As this information is fully recoverable from the words alone, it serves as the transcript-sufficient baseline for semantic memory. *Speaker identity* targets memory for *who* said what: one assistant serves multiple users of equal status, and answering requires the model to associate previously stated information with the voice of the speaker who produced it — a link absent from any transcript. *Paralinguistic cues* target memory for *how* something was said, covering vocal states and delivery characteristics such as hesitation, surprise, emphasis, speaking rate, and laughter. *Environmental sound* targets memory for *what was audible* around the speaker, covering non-speech sound events such as traffic, alarms, machinery, household sounds, and weather. The latter three types are audio-native by construction: the information necessary to answer is absent from the transcript, making them a direct probe of acoustic memory.

**Memory Operations.** VoxMem defines four memory operations, each capturing a distinct way in which evidence distributed across sessions must be used, as shown in Figure 1a with examples in Figure 2. Detailed subtypes are provided in Appendix A.1 and Table 3.

- **Information extraction (IE)** evaluates whether the model can retrieve information from a specific past session. It is designed so that acoustic evidence is always part of the retrieval, in one of two directions: *context-to-cue retrieval* asks for an acoustic attribute of a session identified by what was said, and *cue-to-fact association* asks for what was said in a session identified by an acoustic cue, such as the voice of the person asking (Figure 2(a)).
- **Multi-session reasoning (MSR)** evaluates whether the model can combine evidence from several sessions, for example by counting, matching, or comparing it; Figure 2(b) asks whether two past conversations share the same background sound. The answer depends on which sessions are involved but not on their order.
- **Temporal evolution tracking (TET)** evaluates whether the model can follow how a piece of information changes across sessions. We call this information a *state*: a stated plan, which user is taking part, a speaker’s tone of voice, or the background sound (Figure 2(c)). A TET question asks for the *latest state*, the *state at a specified earlier point*, or the *full sequence of changes*, so its answer depends on the order of sessions. For acoustic evidence, a change is not announced in words: the user’s tone or the surrounding sound is simply different in a later session, so the model must detect the change from the audio.
- **Answer refusal (AR)** evaluates whether the model abstains when the history does not support a unique answer. AR items are derived from existing IE, MSR, and TET questions by systematically removing or neutralizing the evidence required to answer them (Table 10). In speech, the evidence can be neutralized while the words remain, for instance by removing the acoustic cue or the link between a fact and the voice of the person asking, so the model must notice that the acoustic information needed for the answer is gone.

### 3.2 Benchmark Construction

We construct VoxMem along the two-dimensional taxonomy, covering 15 evaluation scenarios and leaving out information extraction over speech semantics. Each multi-session conversation is composed of three types of sessions designed to ensure both naturalism and controlled scenarios. *Evidence sessions* contain the information required to answer the question. *Haystack sessions* introduce plausible but misleading content on the same topic, ensuring the model cannot answer by topic matching alone and must reason over the full acoustic and semantic context. *Filler sessions* contain ordinary conversations unrelated to the question, extending the history to the target context length.

Figure 2(a) illustrates this structure across memory types. In scenario A, a user asks what they said earlier about a lamp replacement; the answer, “paused”, appears in one prior session spoken in that user’s voice — the *evidence* session. A second session, spoken by a different user, also discusses lamp replacement but with different content, forming the *haystack*: the model cannot simply retrieve the only session on the topic but must identify the correct speaker. The remaining *filler* sessions pad the history with unrelated content; Appendix B.6 details each session type.

Every item follows the same pipeline (Figure 3). We first decide the question, its answer, and the evidence it needs, and write the evidence and haystack sessions as text dialogues; filler sessions take their text from InstructS2S (Fang et al., 2025), an existing corpus of instruction-following dialogues. We then synthesize every session with the same





**Figure 2. Representative VoxMem examples.** (a) IE × Speaker: recall a fact from the querying speaker; (b) MSR × Environmental: link sessions sharing a background sound; (c) TET × Paralinguistic: track a changing vocal state; (d) AR × Semantics: abstain when evidence is missing.


TTS system and the voices of the history’s users, so that neither voice nor recording quality reveals a session’s role, and check each session before assembling them into histories of four lengths.

**Building evidence sessions.** Construction follows a three-stage pipeline (Figure 3). During the first stage of *planning*, each item begins with a structured plan specifying the question, its gold answer, and the required evidence, before any dialogue or audio is written. Evidence is distributed across sessions according to the operation type: a single session for IE, multiple for MSR, and an ordered sequence for TET. The plan also enforces validity constraints: the answer must be unique and, for audio-native items, unrecoverable from the transcript alone. We generate over 30,000 plans, with questions rendered into natural language via Gemini-3.7-Flash and GPT-5.6-Luna.

During the second phase of *dialogue writing*, each evidence session is written as a user–assistant dialogue. To prevent answer leakage, the two sides are authored independently, neither referencing the speaker, vocal tone, or background sounds, so the answer can only be recovered from audio.

The last stage of *speech synthesis* generates the spoken conversation. User turns are synthesized using Higgs-TTS-3 (Boson AI, 2026), with each user assigned a fixed VCTK voice (Yamagishi et al., 2019) across all sessions. Paralinguistic cues are introduced via style controls and environmental sounds from ESC-50 (Piczak, 2015) are mixed in at 10dB SNR. For every such turn, a *paired rendition*, identical in words and voice but with the cue removed, is retained for quality control (Section 3.3). In the final input, user turns are audio and assistant turns are text, with session boundaries and timestamps. Because assistant fixed replies should carry no answer-critical acoustic evidence by design, we provide them as text, which removes no information the questions depend on and allows us to evaluate LALMs that accept audio input but do not generate speech; under this setting, we can give every model an identical history.

**Adding haystack and filler sessions.** Haystack sessions resemble the evidence but do not yield the answer: some are evidence sessions borrowed from other questions on a compatible topic, and others are written specifically for the question, matching its topic or acoustic context while providing a different value or omitting the answer entirely. To verify their difficulty, a text-only classifier cannot distinguish evidence from haystack sessions (51–56% accuracy, near the 47–49% shuffled-label baseline), confirming that the model must use the question, not surface patterns, to locate the evidence. Filler sessions are drawn from InstructS2S (Fang et al., 2025) and trimmed to match VoxMem session lengths.

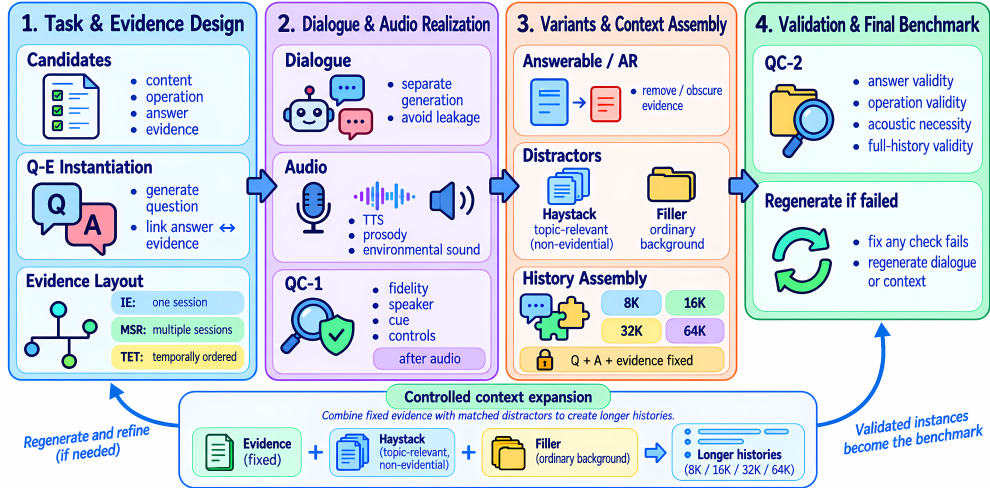

**Figure 3.** VoxMem construction pipeline: questions are planned from an operation, evidence type, and answer; evidence is realized as spoken dialogue with controlled acoustic cues; histories are built at 8K–64K with question and evidence fixed; multi-stage quality control validates each step.

Every added session is verified not to supply an alternative answer to any item in the benchmark, and no session is reused excessively (Appendix B.5).

**Assembling histories of four lengths.** To enable controlled evaluation as context grows, each item is embedded in histories at four lengths: 8K, 16K, 32K, and 64K tokens, measured with a Whisper encoder to provide a unified length scale across models (approximately 2.5 to 20 minutes of audio). Longer histories strictly extend shorter ones, preserving all sessions from the shorter history and adding only more haystacks and fillers. This ensures the question, answer, and evidence remain identical across lengths, so any performance drop can be attributed to the growing context rather than a change in the question itself. To prevent positional bias, evidence and haystack sessions are distributed uniformly throughout the history so that neither position nor timestamp signals which session holds the answer (Appendix B.6). Sessions whose relative order is question-relevant preserve that order to maintain TET validity. AR items reuse the histories of their source items, modifying only the evidence to ensure no unique answer remains recoverable, keeping the surrounding context identical so that the only change is the availability of evidence.

### 3.3 Quality Control

Construction errors can cause an item to test something other than its intended cell: a cue may be imperceptible, an answer may not be unique, an audio-native item may be answerable from the transcript, or the assembled history may introduce a spurious answer. These failure modes arise at different construction stages and require validation at two levels. All model-based checks use Gemini-3.7-Flash, which is not among the evaluated models, ensuring no model is assessed on items it helped filter. Items that fail are revised and rechecked; those that still fail are discarded.

**Session-level validation (QC-1).** The first level targets failures that can be detected within a single session, before histories are assembled. An audio-language model verifies transcript fidelity, speaker consistency, and the perceptibility of target acoustic cues. Deterministic checks confirm that paralinguistic pairs share the same text and voice reference and environmental pairs keep the clean speech stem.

**Question-family validation (QC-2).** The second level targets failures that only emerge once the full history is assembled. Each answerable question at all four lengths, with its AR variants, undergoes three checks. *Answer and operation validity*

**Table 2.** Acoustic-evidence validation with Gemini-3.7-Flash on all 669 answerable questions at 8K. Transcript Only replaces each user turn with its exact synthesis text (all else fixed);  $\Delta$ : drop from Full Audio.

| Evidence Type    | <i>n</i> | Full Audio  | Transcript Only | $\Delta$    |
|------------------|----------|-------------|-----------------|-------------|
| Speaker          | 126      | <b>69.8</b> | 10.3            | <b>59.5</b> |
| Paralinguistic   | 222      | <b>42.8</b> | 3.2             | <b>39.6</b> |
| Environmental    | 126      | <b>28.6</b> | 0.8             | <b>27.8</b> |
| Speech Semantics | 195      | <b>75.9</b> | 71.0            | <b>4.9</b>  |
| All              | 669      | <b>54.9</b> | 23.8            | <b>31.0</b> |

|                              | Speech Semantics<br>n=232 |             |             | Speaker Identity<br>n=147 |             |             | Paralinguistic Cues<br>n=264 |             |             | Environmental Sound<br>n=156 |             |             | Overall<br>n=799 |             |             |
|------------------------------|---------------------------|-------------|-------------|---------------------------|-------------|-------------|------------------------------|-------------|-------------|------------------------------|-------------|-------------|------------------|-------------|-------------|
| Qwen3.8-Omni-Flash           | 65.1                      | 65.1        | 60.3        | 52.4                      | 47.6        | 42.2        | 27.7                         | 26.1        | 25.4        | 26.3                         | 19.2        | 25.0        | 42.8             | 40.1        | 38.5        |
| Gemini-3.1-Pro               | 72.0                      | 69.0        | 68.5        | 39.5                      | 40.8        | 29.3        | 30.3                         | 23.1        | 19.7        | 23.1                         | 21.2        | 21.2        | 42.7             | 39.3        | 35.9        |
| Gemini-3.8-Flash             | 65.5                      | 65.5        | 54.3        | 51.0                      | 50.3        | 41.5        | 24.6                         | 23.9        | 20.8        | 27.6                         | 23.7        | 19.2        | 41.9             | 40.8        | 34.0        |
| Qwen3.5-Omni-Plus            | 63.8                      | 56.9        | 56.0        | 47.6                      | 35.4        | 31.3        | 25.8                         | 22.3        | 19.3        | 25.6                         | 25.0        | 23.7        | 40.8             | 35.3        | 33.0        |
| Gemini-2.5-Pro               | 56.0                      | 45.3        | 38.8        | 24.5                      | 21.1        | 19.0        | 20.5                         | 17.4        | 14.8        | 24.4                         | 21.2        | 20.5        | 32.3             | 26.9        | 23.7        |
| Qwen3-Omni-30B-A3B           | 46.1                      | 41.4        | 38.4        | 36.1                      | 19.0        | 25.2        | 23.1                         | 15.5        | 20.1        | 23.7                         | 20.5        | 18.6        | 32.3             | 24.7        | 26.0        |
| Gemma-4-E4B-it               | 50.4                      | 44.0        | 35.8        | 33.3                      | 28.6        | 29.3        | 19.7                         | 16.7        | 14.0        | 20.5                         | 19.9        | 16.7        | 31.3             | 27.4        | 23.7        |
| MiniCPM-o-4.5                | 43.5                      | 43.5        | 31.0        | 38.1                      | 34.0        | 28.6        | 21.2                         | 14.4        | 11.4        | 17.9                         | 17.9        | 18.6        | 30.2             | 27.2        | 21.7        |
| Ultravox-v0.6-Llama-3.1-8B   | 44.0                      | 41.8        | 35.3        | 42.2                      | 32.0        | 31.3        | 15.2                         | 14.0        | 15.5        | 15.4                         | 12.2        | 17.3        | 28.5             | 25.0        | 24.5        |
| Audio-Flamingo-Next          | 40.1                      | 35.3        | 31.9        | 36.1                      | 27.9        | 23.8        | 17.0                         | 17.8        | 15.2        | 16.7                         | 14.7        | 13.5        | 27.2             | 24.2        | 21.3        |
| Baichuan-Audio-7B            | 40.9                      | 41.4        | 30.6        | 36.1                      | 38.8        | 35.4        | 15.2                         | 15.9        | 13.3        | 13.5                         | 15.4        | 13.5        | 26.2             | 27.4        | 22.4        |
| MiMo-Audio-7B-Instruct       | 35.8                      | 34.5        | 27.2        | 32.7                      | 29.3        | 23.1        | 16.3                         | 15.2        | 13.3        | 19.9                         | 19.9        | 18.6        | 25.7             | 24.3        | 20.2        |
| FireRedAudio-9B              | 33.6                      | 28.4        | 28.9        | 27.2                      | 26.5        | 25.9        | 17.4                         | 16.3        | 15.2        | 18.6                         | 21.8        | 14.7        | 24.2             | 22.8        | 21.0        |
| Phi-4-Multimodal             | 31.9                      | 27.6        | 27.6        | 36.1                      | 26.5        | 27.9        | 9.1                          | 13.6        | 14.0        | 8.3                          | 20.5        | 13.5        | 20.5             | 21.4        | 20.4        |
| Baichuan-Omni-1.5-7B         | 31.0                      | 31.9        | 28.9        | 21.8                      | 18.4        | 17.0        | 12.9                         | 12.9        | 12.9        | 13.5                         | 17.9        | 10.3        | 19.9             | 20.4        | 17.8        |
| <b>Mean proprietary (5)</b>  | <b>64.5</b>               | <b>60.3</b> | <b>55.6</b> | <b>43.0</b>               | <b>39.0</b> | <b>32.7</b> | <b>25.8</b>                  | <b>22.6</b> | <b>20.0</b> | <b>25.4</b>                  | <b>22.1</b> | <b>21.9</b> | <b>40.1</b>      | <b>36.5</b> | <b>33.0</b> |
| <b>Mean open-weight (10)</b> | <b>39.7</b>               | <b>37.0</b> | <b>31.6</b> | <b>33.9</b>               | <b>28.1</b> | <b>26.7</b> | <b>16.7</b>                  | <b>15.2</b> | <b>14.5</b> | <b>16.8</b>                  | <b>18.1</b> | <b>15.5</b> | <b>26.6</b>      | <b>24.5</b> | <b>21.9</b> |
|                              | 8K                        | 16K         | 32K         | 8K                        | 16K         | 32K         | 8K                           | 16K         | 32K         | 8K                           | 16K         | 32K         | 8K               | 16K         | 32K         |

**Figure 4.** Spoken-memory performance across evidence types and history lengths. Accuracy (%) of 15 LALMs at the 8K, 16K, and 32K reference history budgets, broken down by the answer-critical evidence type. The horizontal rule separates proprietary and open-weight models, with unweighted group means shown at the bottom.

verifies that the evidence uniquely determines the gold answer and that the question requires the intended operation, tested by removing or reordering evidence sessions and confirming the answer changes only as predicted; questions answerable from wording or world knowledge alone are rejected. *Acoustic necessity* rejects audio-native questions answerable from the transcript or with the cue replaced by its paired rendition. *Full-history validity* checks each history for leaked answers, alternative answers, and residual AR answerability.

**Outcome of the acoustic-necessity check.** To confirm that this filter holds on the final benchmark, we compare the full-audio and transcript-only accuracy of Gemini-3.7-Flash on all 669 answerable questions at 8K, where transcript-only input replaces each user turn with its synthesis text. With speech semantics as a transcript-sufficient reference, transcript-only input reduces accuracy on audio-native questions from 46.2% to 4.4%, but on speech semantics only from 75.9% to 71.0% (Table 2). Thus, the retained audio-native questions cannot be answered from an oracle transcript.

## 4 Evaluation and Analysis

### 4.1 Experimental Setup

**Models and Inputs.** We evaluate 15 LALMs, including ten open-weight and five proprietary models. The open-weight models span audio-specialist and omni-modal architectures; the proprietary models comprise three Gemini variants and two Qwen variants. All models are evaluated through their native audio interfaces. Model versions and other details are in Appendix C.1.

**Evaluation Protocol.** We evaluate each model at four history lengths, 8K, 16K, 32K, and 64K tokens, where length is measured in Whisper-encoder tokens so that all models share one scale (Section 3.2). Each model receives the interaction history followed by the final query and generates a single response, using the same task instructions for all models (Appendix F).

**Scoring and Aggregation.** All questions are open-ended with short answers, such as a word or phrase, a number, yes or no, or an ordered list of states, and AR items expect the model to state that the history does not support an answer. Because responses are free text, exact string matching would miss correct answers phrased differently, so we score them with an LLM judge: Gemini-3.7-Flash reads the question, the gold answer, and the response, and marks the response correct or incorrect under a rule for the question’s answer type, with refusals attributed to capability or policy counted as incorrect. Re-judging responses with GPT-5.6-Luna yields  $\kappa = 0.95$  agreement. We report accuracy, the fraction of

questions judged correct, for each evidence type, operation, and length; overall accuracy pools answerable and AR items. Appendix C.4 lists the answer types, the rule for each, and the judge prompt, all of which are released with the benchmark.

## 4.2 Acoustic Evidence

Figure 4 summarizes performance across models, acoustic evidence types, and history lengths.

**Finding 1: Current LALMs remain far from reliable spoken conversational memory.** At the 32K reference budget, even before the longest histories, no evaluated model exceeds 40% overall accuracy, with the strongest model reaching 38.5%. At this budget, the five proprietary models average 33.0% and the ten open-weight models 21.9%. Although model families differ substantially in absolute performance, low accuracy is not confined to a small subset of models: recovering and appropriately using information from multi-session spoken histories remains challenging.

**Finding 2: Non-lexical acoustic information is substantially less accessible than speech semantics.** Performance differs much more sharply across the type of information to be remembered. On average, speech semantics is the most accessible form of historical information, whereas memory for non-lexical acoustic information is substantially weaker. At 32K, proprietary models average 55.6% on Speech Semantics, compared with 32.7% on Speaker Identity, 20.0% on Paralinguistic Cues, and 21.9% on Environmental Sound. The same qualitative separation appears among open-weight models, whose corresponding means are 31.6%, 26.7%, 14.5%, and 15.5%. Together with the transcript-only check in Section 3.3, these results show that strong lexical performance masks substantial failures to preserve the broader information conveyed by spoken interaction.

## 4.3 Memory Operations

Figure 5 breaks down performance over the 15 valid operation–evidence combinations at 32K.


**Finding 3: Memory difficulty depends on the interaction between the operation and the evidence type.** Memory operations are not uniformly difficult across evidence types. Multi-Session Reasoning (MSR) is relatively robust: models achieve 41.8% on Speech Semantics and 43.1% on Speaker Identity, while still reaching 26.7% and 25.2% on Paralinguistic and Environmental evidence—well above the corresponding Information Extraction scores (8.8% and 13.5%). Thus, combining evidence across sessions is not necessarily harder than retrieving it from one session. Temporal Evolution Tracking (TET) follows a different pattern. Models track speech semantics well (44.5%), but performance falls to 20.0% for Speaker Identity and nearly collapses for Paralinguistic (3.4%) and Environmental (1.2%) evidence.

The main limitation is not temporal reasoning alone, but maintaining and updating states carried by vocal delivery or ambient sound, possibly reflecting limited stateful modeling in current LALMs.

**Finding 4: Answer refusal follows a different profile from answering.** Models abstain more successfully for Paralinguistic and Environmental questions (34.3% and 34.2%) than for Speech Semantics and Speaker Identity (19.9% and 16.2%), the opposite of the pattern observed in answerable questions. This pattern suggests that models often abstain not because they correctly recognize that the required evidence is absent, but because they struggle to identify or use this acoustic evidence even when it is present. High refusal accuracy on acoustic questions thus reflects a general inability to process acoustic information, not genuine awareness of insufficient evidence.


## 4.4 Controlled History Length and Error Analysis

We study history length and categorize failures via Gemini-3.7-Flash attribution (Figure 7).

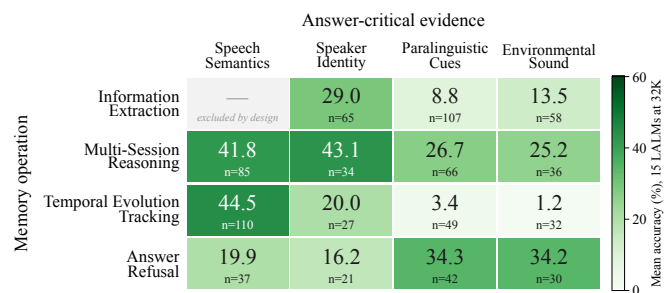


**Figure 5.** Memory operations interact strongly with the information carried by past speech. Mean accuracy (%) across 15 LALMs at the 32K reference history budget for each valid combination of memory operation and answer-critical evidence type. Speech-Semantics IE is excluded by benchmark design. Numbers below each score denote the number of evaluation questions in the corresponding cell.



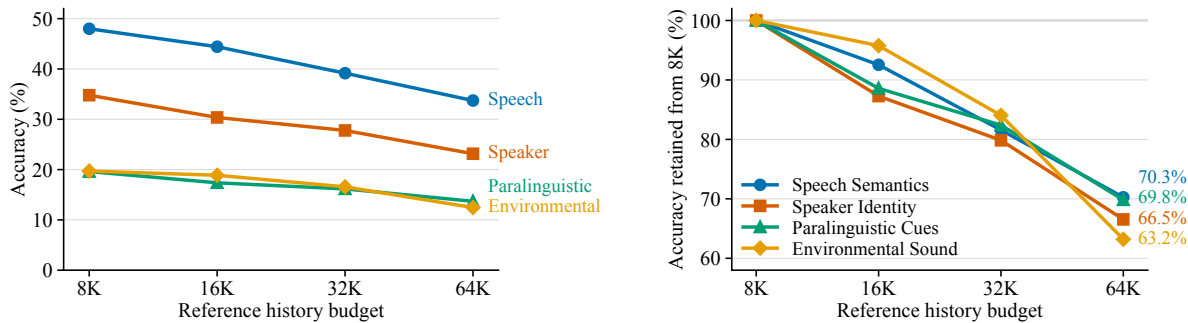

**Figure 6.** Accuracy scaling by evidence type across context budgets (8K–64K). Left: raw accuracy, showing absolute performance for each evidence type. Right: retention relative to each type’s own 8K baseline, isolating the rate of decay from the level difference.

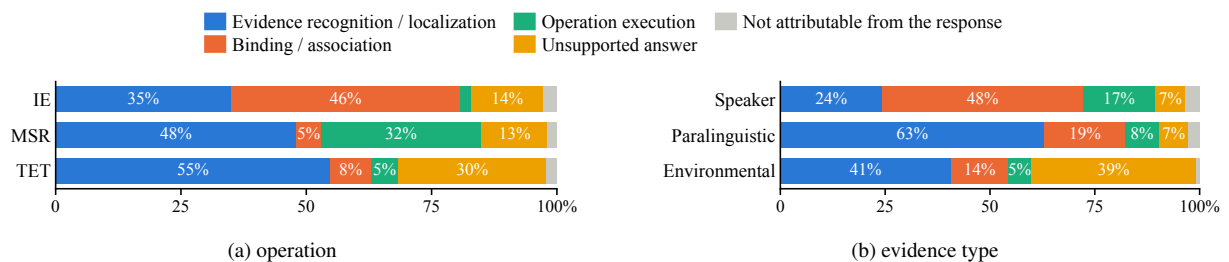

**Figure 7.** Error profiles at 64K, attributed with an LLM: composition of incorrect attempted responses (refusals excluded) by (a) answerable memory operation and (b) acoustic evidence type. Full criteria and question breakdowns are in Appendix E.3.

**Finding 5: Access to the same evidence declines as history grows, at different rates across evidence types.** From 8K to 32K, mean accuracy drops from 40.1% to 33.0% for proprietary models and from 26.6% to 21.9% for open-weight models. This decline extends to 64K across all four evidence types (Figure 6). Because VoxMem holds each question and its required evidence fixed across context budgets, these drops can only be attributed to the growing surrounding history: larger context windows do not guarantee stable access to information already present in it.

The rate of decline differs by evidence type. At 64K, models retain 70.3% of their 8K accuracy on Speech Semantics and 69.8% on Paralinguistic Cues, compared with 66.5% for Speaker Identity and 63.2% for Environmental Sound. Speaker and environmental memory thus degrades fastest, while Paralinguistic memory, despite the lowest absolute accuracy, declines at a rate comparable to Speech Semantics. Low baseline performance and sensitivity to history length are therefore distinct failure modes: models struggle with paralinguistic information at any context length, whereas speaker and environmental memory erodes specifically as history grows.

**Finding 6: Error profiles differ qualitatively across both evidence types and memory operations.** Across memory operations, IE errors are dominated by binding and association failures (46%), meaning models recover an acoustic cue but fail to link it to the correct context. MSR errors split between evidence localization (48%) and operation execution (32%), reflecting the additional demands of cross-session comparison and aggregation. TET errors are overwhelmingly localization failures (55%), with operation-execution errors rare (5%), indicating that tracking breaks down before reasoning begins. Across evidence types, speaker errors are most often binding failures (48%), consistent with failures to maintain voice-to-content associations across sessions; paralinguistic errors are dominated by localization failures (63%), suggesting that answer-critical vocal cues are often not retrieved at all; and environmental errors split between localization (41%) and unsupported answers (39%). These profiles show that the three audio-native evidence types are not a single homogeneous difficulty: speaker memory is particularly sensitive to cross-session association, while paralinguistic and environmental memory more often fail before any reasoning takes place.



## 5 Conclusion

We introduced VoxMem, a benchmark for spoken conversational memory organized along two axes of acoustic evidence and memory operations, spanning 15 evaluation scenarios at four controlled context lengths. Across 15 LALMs, models remember *what was said* far better than *who said it*, *how it was said*, or *what was heard in the environment*. They also track evolving states reliably only when changes are stated in words. As interaction histories grow, access to previously available evidence consistently degrades, although weaker memory types are not necessarily more sensitive to context length. Importantly, memory failures also differ in nature: speaker-identity errors most often arise from attributing remembered information to the wrong person, whereas paralinguistic errors more often reflect a failure to retain the acoustic cue itself. Thus, simply supporting longer audio contexts is insufficient for persistent spoken interaction. Future systems must preserve non-lexical acoustic information and maintain its associations with speakers, events, and sessions over time.

## References

- Abdelrahman Abouelenin, Atabak Ashfaq, Adam Atkinson, Hany Awadalla, Nguyen Bach, Jianmin Bao, Alon Benhaim, Martin Cai, Vishrav Chaudhary, Congcong Chen, et al. Phi-4-mini technical report: Compact yet powerful multimodal language models via mixture-of-loras. *arXiv preprint arXiv:2503.01743*, 2025. URL <https://arxiv.org/abs/2503.01743>.
- Orevaoghene Ahia, Martijn Bartelds, Kabir Ahuja, Hila Gonen, Valentin Hofmann, Siddhant Arora, Shuyue Stella Li, Vishal Puttagunta, Mofetoluwa Adeyemi, Charishma Buchireddy, et al. Blab: Brutally long audio bench. *arXiv preprint arXiv:2505.03054*, 2025.
- Boson AI. Higgs tts 3: Conversational speech for voice ai from boson ai. <https://huggingface.co/bosonai/higgs-tts-3-4b>, 2026.
- Xize Cheng, Wenxu Jia, Chenyuhao Wen, Dongjie Fu, Zehan Wang, Xinyu Zhang, and Tao Jin. Vox-infinity: Benchmarking the limits of long-context spoken language models, 2026. URL <https://arxiv.org/abs/2609.22452>.
- Yunfei Chu, Jin Xu, Xiaohuan Zhou, Qian Yang, Shiliang Zhang, Zhijie Yan, Chang Zhou, and Jingren Zhou. Qwen-audio: Advancing universal audio understanding via unified large-scale audio-language models. *arXiv preprint arXiv:2311.07919*, 2023.
- Junbo Cui, Bokai Xu, Chongyi Wang, Tianyu Yu, Weiyue Sun, Yingjing Xu, Tianran Wang, Zhihui He, Wenshuo Ma, Tianchi Cai, et al. Minicpm-o 4.5: Towards real-time full-duplex omni-modal interaction. *arXiv preprint arXiv:2604.27393*, 2026.
- Yayue Deng, Guoqiang Hu, Haiyang Sun, Xiangyu Zhang, Haoyang Zhang, Fei Tian, Xuerui Yang, Gang Yu, and Eng Siong Chng. Multi-bench: A multi-turn interactive benchmark for assessing emotional intelligence ability of spoken dialogue models. *arXiv preprint arXiv:2511.00850*, 2025.
- Yuhao Du, Qianwei Huang, Guo Zhu, Zhanchen Dai, Shunian Chen, Qiming Zhu, Le Pan, Minghao Chen, Yuhao Zhang, Li Zhou, Benyou Wang, and Haizhou Li. MTalk-Bench: Evaluating speech-to-speech models in multi-turn dialogues via arena-style and rubrics protocols. *arXiv preprint arXiv:2508.18240*, 2025.
- Qingkai Fang, Shoutao Guo, Yan Zhou, Zhengrui Ma, Shaolei Zhang, and Yang Feng. Llama-omni: Seamless speech interaction with large language models. In *The Thirteenth International Conference on Learning Representations*, 2025.
- Gemma Team. Gemma 4 technical report, 2026. URL <https://arxiv.org/abs/2607.02770>.
- Sreyan Ghosh, Zhifeng Kong, Sonal Kumar, S Sakshi, Jaehyeon Kim, Wei Ping, Rafael Valle, Dinesh Manocha, and Bryan Catanzaro. Audio flamingo 2: An audio-language model with long-audio understanding and expert reasoning abilities. *arXiv:2503.03983*, 2025.

- Sreyan Ghosh, Arushi Goel, Kaousheik Jayakumar, Lasha Koroshinadze, Nishit Anand, Zhifeng Kong, Siddharth Gururani, Sang gil Lee, Jaehyeon Kim, Aya Aljafari, et al. Audio flamingo next: Next-generation open audio-language models for speech, sound, and music. *arXiv preprint arXiv:2604.10905*, 2026.
- Advait Gosai, Tyler Vuong, Utkarsh Tyagi, Steven Li, Wenjia You, Miheer Bavare, Arda Uçar, Zhongwang Fang, Brian Jang, Bing Liu, et al. Audio multichallenge: A multi-turn evaluation of spoken dialogue systems on natural human interaction. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 35740–35770, 2026.
- Peize He, Zichen Wen, Yubo Wang, Yuxuan Wang, Xiaoqian Liu, Jiajie Huang, Zehui Lei, Zhuangcheng Gu, Xiangqi Jin, Jiabing Yang, et al. Audiomarathon: A comprehensive benchmark for long-context audio understanding and efficiency in audio llms. *arXiv preprint arXiv:2510.07293*, 2025.
- Peize He, Yaodi Luo, Xiaoqian Liu, Xuyang Liu, Jiahang Deng, Yaosong Du, Bangyu Li, Xiyan Gui, Yuxuan Chen, and Linfeng Zhang. Headrouter: Dynamic head-weight routing for task-adaptive audio token pruning in large audio language models. *arXiv preprint arXiv:2604.23717*, 2026.
- Jiyoung Jang, Minseong Boo, and Hyoungun Kim. Conversation chronicles: Towards diverse temporal and relational dynamics in multi-session conversations. In *Proceedings of the 2023 conference on empirical methods in natural language processing*, pp. 13584–13606, 2023.
- Heeseung Kim, Che Hyun Lee, Sangkwon Park, Jiheum Yeom, Nohil Park, Sangwon Yu, and Sungroh Yoon. Does your voice assistant remember? analyzing conversational context recall and utilization in voice interaction models. In *Findings of the Association for Computational Linguistics: ACL 2025*, pp. 8984–9014, 2025.
- Tianpeng Li, Jun Liu, Tao Zhang, Yuanbo Fang, Da Pan, Mingrui Wang, Zheng Liang, Zehuan Li, Mingan Lin, Guosheng Dong, et al. Baichuan-audio: A unified framework for end-to-end speech interaction. *arXiv preprint arXiv:2502.17239*, 2025a.
- Yadong Li, Jun Liu, Tao Zhang, Song Chen, Tianpeng Li, Zehuan Li, Lijun Liu, Lingfeng Ming, Guosheng Dong, Da Pan, et al. Baichuan-omni-1.5 technical report. *arXiv preprint arXiv:2501.15368*, 2025b.
- Yueqian Lin et al. Speechprune: Context-aware token pruning for speech information retrieval. *arXiv preprint:2412.12009*, 2024.
- LLM-Core-Team Xiaomi. Mimo-audio: Audio language models are few-shot learners, 2025. URL [GitHub-XiaomiMiMo/MiMo-Audio](https://github.com/XiaomiMiMo/MiMo-Audio).
- Kaiwen Luo, Liang Lin, Yibo Zhang, Moayad Aloqaily, Jialiang Tao, Dexian Wang, Zhenhong Zhou, Junwei Zhang, Kun Wang, Li Sun, and Qingsong Wen. ChronosAudio: A comprehensive long-audio benchmark for evaluating audio-large language models. *arXiv preprint arXiv:2601.04876*, 2026.
- Adyasha Maharana, Dong-Ho Lee, Sergey Tulyakov, Mohit Bansal, Francesco Barbieri, and Yuwei Fang. Evaluating very long-term conversational memory of llm agents. *arXiv preprint arXiv:2402.17753*, 2024.
- Karol J Piczak. Esc: Dataset for environmental sound classification. In *Proceedings of the 23rd ACM international conference on Multimedia*, pp. 1015–1018, 2015.
- Xiyu Ren, Zhaowei Wang, Yiming Du, Zhongwei Xie, Chi Liu, Xinlin Yang, Haoyue Feng, Wenjun Pan, Tianshi Zheng, Baixuan Xu, et al. Memlens: Benchmarking multimodal long-term memory in large vision-language models. *arXiv:2605.14906*, 2026.
- Shuzheng Si, Wentao Ma, Haoyu Gao, Yuchuan Wu, Ting-En Lin, Yinpei Dai, Hangyu Li, Rui Yan, Fei Huang, and Yongbin Li. Spokenwoz: A large-scale speech-text benchmark for spoken task-oriented dialogue agents. *Advances in Neural Information Processing Systems*, 36:39088–39118, 2023.
- Changli Tang, Wenyi Yu, Guangzhi Sun, Xianzhao Chen, Tian Tan, Wei Li, Lu Lu, Zejun Ma, and Chao Zhang. Salmonn: Towards generic hearing abilities for large language models. In *International Conference on Learning Representations*, 2024.

- FireRed Team. Fireredaudio: A general-purpose audio language model with decoupled continuous representations for understanding and generation. *arXiv preprint arXiv:2608.24168*, 2026.
- Boyong Wu, Chao Yan, Chen Hu, Cheng Yi, Chengli Feng, Fei Tian, Feiyu Shen, Gang Yu, Haoyang Zhang, Jingbei Li, et al. Step-audio 2 technical report. *arXiv preprint arXiv:2507.16632*, 2025.
- Di Wu, Hongwei Wang, Wenhao Yu, Yuwei Zhang, Kai-Wei Chang, and Dong Yu. LongMemEval: Benchmarking chat assistants on long-term interactive memory. *arXiv preprint arXiv:2410.10813*, 2024.
- Di Wu, Zixiang Ji, Asmi Kawatkar, Bryan Kwan, Jia-Chen Gu, Nanyun Peng, and Kai-Wei Chang. Longmemeval-v2: Evaluating long-term agent memory toward experienced colleagues. *arXiv preprint arXiv:2605.12493*, 2026.
- Yang Xiao, Siyi Wang, Han Yin, Hong Jia, Vidhyasaharan Sethu, Eun-Jung Holden, and Ting Dang. Why can't they remember? uncovering representation and retrieval bottlenecks in multi-turn acoustic memory. *arXiv preprint arXiv:2605.27039*, 2026.
- Jin Xu et al. Qwen3-Omni Technical Report. *arXiv preprint arXiv:2509.17765*, 2025.
- Junichi Yamagishi, Christophe Veaux, and Kirsten MacDonald. Cstr vctk corpus: English multi-speaker corpus for cstr voice cloning toolkit (version 0.92). *The Rainbow Passage which the speakers read out can be found in the International Dialects of English Archive:([Http://Web.Ku.Edu/ idea/Readings/Rainbow.Htm](http://web.ku.edu/idea/Readings/Rainbow.htm)).*, 2019.
- Fei Yang, Xuanfan Ni, Renyi Yang, Jiahui Geng, Qing Li, Chenyang Lyu, Yichao Du, Longyue Wang, Weihua Luo, and Kaifu Zhang. Longspeech: A scalable benchmark for transcription, translation and understanding in long speech. In *ICASSP 2026-2026 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 15547–15551. IEEE, 2026.
- Jashin Ye, Dongxiao Wang, Yixuan Ye, Sashuai Zhou, Weihuang Lin, Mingyang Han, Kunpeng Wang, Zeyu Yuan, Boyu Li, Haoxiang Shi, Jingchen Shu, Jun Song, and Bo Zheng. Voicegiraffe: A benchmark for extreme long-context audio-language understanding. *arXiv preprint arXiv:2605.27976*, 2026.

## A Task Definitions and Taxonomy

This appendix provides the detailed task taxonomy underlying VoxMem. The benchmark separates *what* information must be recovered from past spoken interactions from *how* that information must be used. The former is represented by the evidence-type axis, while the latter is represented by the memory-operation axis. We first summarize the operation subtypes and the scope of each evidence type, and then specify the valid task forms for Information Extraction, Multi-Session Reasoning, and Temporal Evolution Tracking.

### A.1 Memory Operations and Subtypes

The four memory operations characterize different ways in which historical evidence is used to answer the final query. Information Extraction (IE) identifies and uses information from a single answer-bearing historical session; Multi-Session Reasoning (MSR) combines evidence distributed across multiple sessions without depending on their temporal order; and Temporal Evolution Tracking (TET) reasons over temporally ordered states whose relative order is answer-critical. Answer Refusal (AR) differs from these three answerable operations: rather than defining an independent family of answerable task subtypes, AR is constructed as a paired counterpart of an IE, MSR, or TET item after the minimum evidence required for a unique answer is removed, neutralized, or made ambiguous.

Table 3 gives the complete first-level subtype taxonomy. Across the three answerable operations, the taxonomy contains 30 evidence-type–subtype routes: six for IE, twelve for MSR, and twelve for TET. Detailed AR transformations are described in Appendix B.4.

### A.2 Evidence Types and Scope

Each VoxMem question is assigned one primary evidence type according to the evidence that is necessary for determining its answer. The four types are Speech Semantics, Speaker Identity, Paralinguistic Cues, and Environmental Sound. This assignment concerns *answer-critical* evidence rather than all information that happens to occur in the audio: non-target acoustic attributes may occur naturally in a session, but they must not systematically predict the gold answer.

Speech Semantics serves as the transcript-sufficient reference condition, covering information explicitly expressed in spoken language. In contrast, answerable Speaker, Paralinguistic, and Environmental questions are constructed so that the required information is not recoverable from lexical content alone. Table 4 specifies the scope of each evidence type, representative target information, and the corresponding shortcut controls used to keep the design aligned with this distinction.

### A.3 Information Extraction

Information Extraction evaluates whether a model can recover an association involving one answer-bearing historical session embedded within the longer multi-session history. Importantly, IE is not intended to measure isolated recognition of an acoustic attribute. Each item requires a two-stage alignment among a retrieval anchor, the relevant historical session, and the target information.

In *Context-to-Cue Retrieval*, a semantic or temporal anchor first identifies the relevant historical session, after which the model must recover an acoustic property of that session, such as speaker identity, a validated vocal state, or an environmental sound. In *Cue-to-Fact Association*, the direction is reversed: an acoustic cue identifies the relevant historical session, and the model must then recover the semantic fact associated with that session. Speech-Semantics IE is excluded by design. When both the retrieval signal and the requested information are lexical, a single-session instance can largely reduce to local speech transcription or semantic fact retrieval, rather than testing the cross-modal associations that motivate the IE module. The valid IE task forms and their corresponding restrictions are summarized in Table 5.

### A.4 Multi-Session Reasoning

Multi-Session Reasoning requires evidence from multiple historical sessions, but the temporal order of those evidence sessions is not answer-critical. Operationally, MSR is defined over an unordered set of answer-critical evidence:

**Table 3.** Complete first-level subtype taxonomy. The benchmark contains 30 answerable evidence-type–subtype routes: 6 IE routes, 12 MSR routes, and 12 TET routes. Answer Refusal is generated by paired evidence removal or neutralization and therefore does not introduce an independent subtype family.

| Operation | Subtype                  | One-Sentence Definition                                                                                                                                              | Applicable Evidence Types              |
|-----------|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| IE        | Context-to-Cue Retrieval | Uses a semantic or temporal anchor to locate one historical session and then extracts the target speaker, paralinguistic, or environmental attribute from its audio. | Speaker, Paralinguistic, Environmental |
|           | Cue-to-Fact Association  | Uses an acoustic cue to identify one historical session and then retrieves the semantic fact bound to that session.                                                  | Speaker, Paralinguistic, Environmental |
| MSR       | Counting                 | Counts occurrences, distinct items, distinct speakers, or sessions satisfying a criterion across multiple evidence sessions.                                         | All four evidence types                |
|           | Matching / Resolution    | Determines whether cross-session facts, speakers, vocal states, or acoustic events are identical, corresponding, or members of the same group.                       | All four evidence types                |
|           | Aggregation / Comparison | Combines multiple evidence items through arithmetic, set aggregation, speaker-conditioned aggregation, relative comparison, or dominant-state selection.             | All four evidence types                |
| TET       | Latest State             | Retrieves the most recent valid semantic state, speaker binding, vocal state, or observed acoustic scene.                                                            | All four evidence types                |
|           | Historical State         | Recovers the target state at an explicitly specified timestamp, session, or historical stage.                                                                        | All four evidence types                |
|           | Evolution / Transition   | Tracks the ordered sequence, transition pattern, recurrence, or change count of the target evidence across sessions.                                                 | All four evidence types                |
| AR        | Paired Derivation        | Converts an answerable IE, MSR, or TET item into an unanswerable counterpart by removing, neutralizing, or making ambiguous the minimum necessary evidence.          | All four evidence types                |



**Table 4.** Definitions and scope of the four evidence types. Each question has one answer-critical evidence dimension; non-target acoustic attributes may naturally occur but must not systematically predict the answer.

| Evidence Type       | Definition                                                                                                                                                                 | Representative Information                                                                                                  | Scope and Shortcut Controls                                                                                                                                                                                                           |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Speech Semantics    | Evaluates whether a model can remember, integrate, and update facts, plans, preferences, and experiences explicitly expressed in spoken language across multiple sessions. | Facts, quantities, plans, preferences, decisions, experiences, and explicit corrections or updates.                         | Single-session semantic recall is excluded. Speaker identity, vocal style, and background sound must not provide the answer. Perfect-transcript input may remain sufficient by design, making this module a semantic-memory baseline. |
| Speaker Identity    | Evaluates whether a model can recognize and track voice identity across sessions and correctly associate people with their statements, actions, and conversational roles.  | Query-speaker identity, same-speaker matching, speaker–fact binding, and speaker-conditioned retrieval or aggregation.      | Speaker names or explicit textual identity labels must not reveal the answer. For speaker tasks, one assistant serves multiple equal-status users, and the final spoken query is issued by one of the historical users.               |
| Paralinguistic Cues | Evaluates whether a model can remember and reason over non-lexical vocal cues that are not fully represented by ordinary transcripts.                                      | Hesitation, surprise, confidence, tension, excitement, speaking rate, emphasis, laughter, and other validated vocal states. | The transcript and assistant reply must not explicitly describe the target vocal state. Only perceptually reliable and single-turn-recognizable cues are admitted; fine-grained psychological diagnosis is excluded.                  |
| Environmental Sound | Evaluates whether a model can remember and reason over acoustic scenes and non-speech events occurring around the conversation.                                            | Traffic, machinery, alarms, household sounds, weather, and coarse acoustic scenes.                                          | Text must not directly name the target sound or location. Questions refer to the <i>observed acoustic scene or event</i> , avoiding unsupported inference about the user’s exact physical location.                                   |

**Table 5.** Information Extraction task matrix. Each IE item contains one answer-bearing historical session and requires a two-stage alignment between a retrieval anchor, the relevant historical session, and the target information. Speech Semantics has no IE category.

| Evidence Type       | Context-to-Cue Retrieval                                                                                                                                            | Cue-to-Fact Association                                                                                                         | Key Restriction                                                                                                                             |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Speaker Identity    | Use a semantic or timestamp anchor to locate one historical session, then judge whether its speaker matches the current query speaker or another reference session. | Use the spoken query’s voice to locate the matching user’s historical session, then retrieve the fact bound to that speaker.    | Prefer relative identity matching over open-ended speaker naming; textual names and explicit speaker labels are prohibited.                 |
| Paralinguistic Cues | Use a semantic or timestamp anchor to locate one historical session, then identify its validated vocal state, speaking rate, or emphasis pattern.                   | Use a validated paralinguistic cue to locate one historical session, then retrieve the semantic fact expressed in that session. | Prefer discrete, perceptually validated cues. Cue, topic, and fact must be cross-paired so the answer cannot be guessed from content alone. |
| Environmental Sound | Use a semantic or timestamp anchor to locate one historical session, then identify its background event or coarse acoustic scene.                                   | Use an environmental sound or acoustic scene as the retrieval key, then recover the semantic fact bound to that session.        | Environment and topic must be cross-paired; text and assistant responses must not directly mention the target sound or inferred location.   |

**Table 6.** Multi-Session Reasoning matrix. Evidence-session order is not answer-critical: permuting the evidence sessions should not change the gold answer. Every item requires evidence from multiple sessions.

| Evidence Type       | Counting                                                                                                                   | Matching / Resolution                                                                                       | Aggregation / Comparison                                                                                                                               |
|---------------------|----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Speech Semantics    | Count event occurrences, distinct objects, or facts satisfying a semantic criterion across sessions.                       | Resolve whether differently worded references denote the same object, event, plan, or record.               | Sum quantities, merge sets, compare attributes, or derive a joint answer from distributed spoken facts.                                                |
| Speaker Identity    | Count only the sessions belonging to the query speaker, or count distinct speakers satisfying a shared semantic criterion. | Perform same-speaker matching, query-to-history identity resolution, or speaker clustering across sessions. | Aggregate or compare only the facts bound to a target speaker. Speaker identity must change the selected evidence set and therefore the answer.        |
| Paralinguistic Cues | Count sessions or utterances that exhibit a validated vocal state, such as hesitation or excitement.                       | Match, contrast, or group sessions by vocal state or emphasis pattern.                                      | Compare groups, identify a dominant or majority vocal state, or select the more confident/hesitant set. Continuous “emotion arithmetic” is excluded.   |
| Environmental Sound | Count occurrences or distinct categories of sound events or acoustic scenes.                                               | Match or group sessions containing the same sound event, event category, or coarse acoustic scene.          | Aggregate observed sound categories, compare their frequencies, or identify the dominant acoustic scene. Uncalibrated loudness arithmetic is excluded. |

permuting the evidence sessions while preserving their contents should leave the gold answer unchanged. This property distinguishes MSR from Temporal Evolution Tracking.

The MSR taxonomy contains three first-level subtypes. *Counting* determines the number of events, items, speakers, or sessions satisfying a criterion. *Matching / Resolution* determines whether evidence distributed across sessions refers to the same entity, speaker, vocal state, event, or group. *Aggregation / Comparison* combines or compares multiple evidence items to derive a joint answer. The evidence type determines what serves as the retrieval and grouping signal, and therefore which historical evidence contributes to the operation. Table 6 specifies the corresponding task forms for all four evidence types.

## A.5 Temporal Evolution Tracking

In contrast to MSR, Temporal Evolution Tracking is defined over an ordered sequence of historical states. The temporal relationships among the answer-critical evidence are themselves part of the task: changing their ordering or temporal anchors may change the gold answer. Session timestamps provide the default temporal anchors, while Speech-Semantics items may additionally refer to explicit temporal expressions contained in the historical speech.

TET contains three first-level subtypes. *Latest State* asks for the most recent valid state after one or more historical updates. *Historical State* asks for the state at a specified earlier timestamp, session, or stage rather than defaulting to the current state. *Evolution / Transition* asks about the ordered trajectory itself, including changes, recurrence, appearance, disappearance, or transition patterns across sessions.

The interpretation of “state” depends on the answer-critical evidence type. For Speech Semantics it may be an explicitly stated fact, preference, plan, or decision; for Speaker Identity it concerns the speaker associated with a session or the temporal pattern of speaker participation and binding; for Paralinguistic Cues it is a validated vocal state or vocal change; and for Environmental Sound it is an observed acoustic scene or event. In particular, Speaker TET does not assume that a person’s identity itself changes over time; it tracks which speaker is associated with the relevant interaction or how speaker participation and binding evolve across sessions.

Table 7 summarizes the valid TET task forms across the four evidence types.

**Table 7.** Temporal Evolution Tracking matrix. Unlike MSR, TET is order-sensitive: permuting evidence timestamps may change the answer. Session timestamps provide the default temporal anchors; Semantic TET may additionally use explicit time expressions spoken in the historical audio.

| Evidence Type       | Latest State                                                                                                                | Historical State                                                                                                             | Evolution / Transition                                                                                                           |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Speech Semantics    | Recover the latest valid fact, preference, plan, decision, or state after successive spoken updates.                        | Recover the semantic state at a specified date, session, or update stage, rather than defaulting to the current state.       | Track the full update chain, change direction, recurrence, or number of semantic state changes.                                  |
| Speaker Identity    | Identify the speaker bound to the most recent relevant session or determine whether that speaker is the current query user. | Identify the speaker at a specified timestamp and compare that identity with the query speaker or another reference session. | Track speaker appearance, participation, or handoff order. This does <i>not</i> model a person’s identity as changing over time. |
| Paralinguistic Cues | Recover the main user’s latest relevant vocal state or emphasis pattern.                                                    | Recover the main user’s vocal state at a specified timestamp, session, or stage.                                             | Track an ordered sequence of validated vocal states, speaking-rate changes, emphasis shifts, or state recurrence.                |
| Environmental Sound | Recover the latest observed acoustic scene or sound event in the relevant history.                                          | Recover the observed acoustic scene or event at a specified timestamp or session.                                            | Track the ordered transition, disappearance, recurrence, or first/last appearance of acoustic scenes or sound events.            |

## B Benchmark Construction and Validation Details

This appendix provides the construction and validation details omitted from the main text. We first describe how structured question specifications are instantiated as spoken dialogues, then detail the acoustic controls, answer-refusal derivation, distractor and session-reuse rules, and controlled history assembly. Quality control is described in §3.3.

### B.1 Question and Evidence Specification

Each VoxMem question begins as a structured candidate defined before any dialogue or audio is generated. A candidate specifies (i) the memory operation, subtype, and evidence type; (ii) the target information and the condition selecting the historical session or sessions relevant to the query; (iii) the operation applied to that selection; (iv) the answer type and gold value; (v) the supporting facts or acoustic cues and their session assignments; and (vi) validity requirements such as answer uniqueness and acoustic necessity.

For example, a Context-to-Cue IE item may specify a semantic anchor identifying exactly one historical session and ask for the speaker associated with that session. The structured representation records the anchor, the selected session cardinality, the target speaker slot, the supporting evidence, and the requirement that removing the speaker cue renders the question unanswerable.

**Enumeration.** We issue 12,000 generation requests spanning the 30 valid evidence-type–subtype routes described in Appendix A. Each request is associated with an independent content blueprint and may produce multiple candidate specifications under its generation quota, yielding more than 30,000 candidates before validation. Blueprints cover the 20 topic families used in VoxMem together with the permitted speaker, paralinguistic, and environmental attributes.

**Candidate validation.** Before dialogue generation, deterministic checks verify schema integrity, route and cardinality consistency, identifier references, permitted acoustic labels, and the gold answer recomputed from the structured evidence. Evidence-dependency and shortcut checks are applied to each question family after history assembly (§3.3). Candidates failing any required check are not admitted to dialogue generation.

**Table 8. Generation constraints and evidence localization by evidence type.** Speech Semantics serves as the transcript-sufficient reference. For all audio-native types, strict lexical constraints prevent transcript-based shortcuts, ensuring that answer-critical evidence resides exclusively in the acoustic channel. Evidence localization defines the temporal scope of the relevant audio evidence.

| Evidence Type       | Lexical Constraint                                                                                                                                                                 | Evidence Localization                                                                   |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| Speech Semantics    | None (transcript-sufficient reference). The transcript must explicitly contain all answer-bearing facts, entities, and state changes.                                              | Exact semantic span within the target user turn.                                        |
| Speaker Identity    | Strictly prohibits speaker naming, explicit self-introductions, or demographic descriptors; text must remain voice-neutral and compatible with counterfactual speaker assignments. | Whole audio turn (speaker voice characteristics across the utterance).                  |
| Paralinguistic Cues | Strictly prohibits vocal-state labels, descriptive emotion adverbs, or self-reporting (e.g., “I feel hesitant”); text is speakable in the target style without lexical leakage.    | Whole audio turn, or a designated temporal segment when localized to a specific phrase. |
| Environmental Sound | Strictly prohibits mentioning ambient sound events or naming physical environments; dialogue must not semantically entail or hint at the acoustic background.                      | Whole audio turn (continuous background acoustic scene or discrete sound event).        |

## B.2 Spoken Dialogue Generation

Each evidence session is realized as a complete user–assistant dialogue using separate user and assistant generation passes. This separation prevents the generation process from copying answer-bearing information from the user evidence into assistant text.

**User generation.** The user generator receives only the session-local plan, including the facts assigned to that session, their turn assignments, and constraints on the surrounding dialogue. It does not receive the final query, the gold answer, other sessions, distractors, or the corresponding answer-refusal variant. Required semantic facts are realized in their designated turns while preserving their intended meaning, and generated spans are aligned back to the structured evidence.

**Assistant generation.** The assistant generator is evidence-blind: it receives the visible conversation prefix but not the benchmark evidence specification, gold answer, acoustic labels, final query, future user turns, or other sessions. Assistant replies may not repeat, summarize, or confirm answer-bearing details from the preceding user turn. They are additionally prohibited from explicitly describing speaker identity, vocal state, background sound, or other target acoustic attributes.

**Audio-native constraints.** For Speaker, Paralinguistic, and Environmental questions, the user text must remain compatible with the target acoustic realization without lexicalizing it. Thus the target speaker, vocal state, or environmental sound cannot be inferred directly from the canonical transcript. Table 8 summarizes the lexical constraints used for the four evidence types.

## B.3 Acoustic Realization and Controls

All user speech is synthesized with Higgs-TTS-3 (4B) using a fixed generation stack. Speaker identity is controlled through fixed zero-shot VCTK voice references: each benchmark persona is assigned one reference speaker and retains that voice across all sessions.

Paralinguistic cues are imposed through synthesis controls while holding the canonical transcript and speaker reference fixed. For each controlled paralinguistic realization, a corresponding neutral rendition preserves the same text and voice and differs only in the target control.

Environmental evidence is introduced by mixing a selected ESC-50 sound with the clean speech stem at a fixed target SNR of 10 dB. The matched environment-removed rendition preserves the clean speech stem. These paired

**Table 9. Audio realization settings.** Paired controls preserve the canonical transcript and non-target acoustic dimensions while varying the answer-critical cue.

| Component              | Setting                                                                                                                   |
|------------------------|---------------------------------------------------------------------------------------------------------------------------|
| Speech synthesis       | Higgs-TTS-3 (4B), fixed model revision.                                                                                   |
| Audio format           | 24 kHz, 16-bit, mono WAV.                                                                                                 |
| Speaker control        | 30 fixed VCTK reference speakers; each persona retains the same reference across sessions.                                |
| Paralinguistic control | Controlled vocal-state/prosody tags; cued and neutral renditions share the same canonical transcript and voice reference. |
| Environmental assets   | 45 selected ESC-50 types.                                                                                                 |
| Environmental mixing   | Additive mixing at 10 dB target SNR; the matched ablation preserves the clean speech stem.                                |

**Table 10.** Paired derivation rules for Answer Refusal. Each AR item is produced from an answerable source item while preserving the question wording, context budget, haystack sessions, and filler sessions. The gold answer becomes a canonical refusal because the remaining history no longer supports a unique answer.

| Derivation Rule           | Typical Source Route                             | Transformation                                                                                                                         | Why the Remaining Context Is Insufficient                                                                                      |
|---------------------------|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Complete Evidence Removal | IE or single-anchor tasks                        | Remove the sole answer-bearing evidence session while preserving matched haystack and filler sessions.                                 | No remaining session contains the fact or acoustic cue required by the question.                                               |
| Partial Evidence Removal  | MSR or TET                                       | Remove one or more minimally necessary evidence sessions from a multi-session aggregation or ordered update chain.                     | The remaining subset does not determine the count, aggregate, historical state, or transition sequence.                        |
| Cue Neutralization        | Speaker, Paralinguistic, or Environmental routes | Preserve lexical content but replace, suppress, or neutralize the answer-critical voice identity, vocal state, or environmental sound. | Semantic content remains plausible, but the acoustic discriminator needed to select or interpret the target session is absent. |
| Binding Removal           | Speaker routes                                   | Preserve candidate facts while removing the reliable voice-based link between the facts and the current query speaker.                 | Several users’ facts remain possible, so the assistant cannot determine which fact belongs to the person asking the question.  |
| Ambiguity Construction    | IE, MSR, or TET                                  | Retain multiple equally plausible candidates after removing the unique disambiguating evidence.                                        | The history supports more than one answer, so committing to any single content answer would be hallucination.                  |

constructions allow the target acoustic dimension to be removed without changing the lexical content or non-target speech signal.

#### B.4 Answer Refusal Construction

Each Answer Refusal (AR) item is derived from an admitted answerable IE, MSR, or TET item by removing, neutralizing, or obscuring the evidence required for a unique supported answer. The final query and reference context budget are preserved, while modifications are restricted to the answer-critical evidence path.

Table 10 summarizes the five derivation rules used for AR construction. The paired design allows the supported and insufficient-evidence variants to differ primarily in whether the required historical evidence is available. Of 166 constructed AR variants, 130 passed the full validation procedure and are included in the benchmark.



## B.5 Haystack, Filler, and Session Reuse

Long histories contain three session roles: *evidence sessions*, *haystack sessions*, and *filler sessions*, as summarized in Table 11. Evidence sessions contain the answer-critical information specified by the source question. Haystack sessions are deliberately selected to resemble relevant history without supporting the gold answer, whereas filler sessions provide ordinary conversational context without being matched to the target question.

**Haystacks.** Each validated evidence session belongs to exactly one source question, but may additionally serve as a haystack for other compatible questions. A reused session is eligible as a haystack only when it originates from a different source question, matches the target evidence type and required voice organization, satisfies the predefined topic-compatibility rule, and contains no answer-bearing fact from the target question. Surviving candidates are further screened for gold-answer overlap, joint-inference shortcuts, alternative uniquely supported answers, and incompatible speaker, timestamp, or acoustic configurations. In addition to reused haystacks, VoxMem constructs question-specific haystacks as *same-key distractors*. These sessions share the retrieval cue or selection criterion of the target question but do not support its gold answer. For example, a haystack may match the queried topic or acoustic attribute while carrying a non-target value, or may satisfy the retrieval cue without containing the queried attribute at all. Same-key distractors therefore create competition around the relevant retrieval key rather than serving as generic background context.

**Filler sessions.** Filler sessions are not generated specifically for VoxMem, but are drawn from InstructS2S (Fang et al., 2025), an existing corpus of ordinary instruction-following speech dialogues. Before entering the filler pool, candidates are trimmed to match VoxMem session lengths, reducing the extent to which session length alone can reveal session role. They are then screened against the complete set of benchmark atomic facts and gold answers, and are rejected if they state or directly imply protected answer-bearing content. When assigned to a particular history, filler sessions additionally pass compatibility checks for voice organization and timestamps. This global semantic screening allows an admitted filler session to be reused across question families without introducing a known answer path.

**Reuse constraints.** Reuse is capped to prevent a small number of sessions from dominating the benchmark. Within each evidence-type–operation–subtype stratum, a haystack session group may be reused at most twice, while a filler session may appear at most 24 times. Paired acoustic renditions of the same underlying session share a single reuse count. These constraints govern session eligibility and reuse; the number and placement of each session role at different context budgets are determined by the history assembly procedure in Appendix B.6.

## B.6 Controlled History Assembly

After evidence, haystack, and filler sessions have passed the eligibility rules above, they are assembled into four nested histories with nominal reference budgets of 8K, 16K, 32K, and 64K. Across all four instantiations, the question, gold answer, and answer-critical evidence remain fixed; only the surrounding interaction history expands.

**Nested context growth.** The amount of matched distraction increases with both the reference budget and the amount of evidence required by the question. Reused haystack allocation is conditioned on the number of evidence sessions for that item and increases progressively across the four tiers. Question-specific same-key distractors follow a nested schedule of up to 1, 2, 4, and 8 sessions at 8K, 16K, 32K, and 64K, respectively. Filler sessions are then used to occupy the remaining context budget. Because the histories are nested, sessions introduced at a shorter budget are retained when constructing the corresponding longer history.

**Session placement.** Evidence and matched haystack sessions follow the same positional policy so that location alone does not identify which sessions carry the answer-critical information. Additional sessions are interleaved throughout the history rather than appended as a separate block. Assembly preserves all temporal relations required by the source question; in particular, the ordering of answer-critical states in TET items is unchanged when distractor and filler sessions are inserted.

**Resulting history scale.** Figure 1c reports the resulting history scale from 8K to 64K: the number of sessions, audio clips, and minutes of audio per instance. The common reference-length measure is used only to control history scale across models; the model-facing question and evidence are unchanged across budgets.

**Table 11.** Definitions and shared-pool design for evidence, haystack, and filler sessions. Evidence and haystack sessions share a module-specific pool: a session that is evidence for its source question may serve as haystack for a different compatible question, subject to reuse limits and answer-contamination checks.

| Session Role | Answer Relation                                                                                       | Topical / Acoustic Profile                                                                                                                                                                                             | Pool and Reuse Policy                                                                                                                                                         | Required Validation                                                                                                                                                                      |
|--------------|-------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Evidence     | Contains one or more facts or acoustic cues that are minimally necessary for the current gold answer. | Generated for the target module and route; answer-critical information is embedded naturally rather than highlighted.                                                                                                  | Stored in a module-specific pool. A session is evidence for its source question and may be reused only a limited number of times across released instances.                   | Answerability, uniqueness, cue validity, semantic fidelity, naturalness, and absence of transcript or assistant-response leakage.                                                        |
| Haystack     | Does not support the current answer but is intentionally confusable with the current evidence.        | Matched to the evidence along task-relevant axes: topic and fact type for Semantic, voice identity structure for Speaker, vocal-state distribution for Paralinguistic, and sound-event distribution for Environmental. | Selected primarily from other compatible questions’ evidence sessions in the same module-specific pool. Reuse is capped, and the same atomic fact or gold answer is excluded. | Evidence-vs.-haystack classifiers should remain near chance; grouped splits prevent duplicate-session leakage. Each candidate passes answer-contamination and alternative-answer checks. |
| Filler       | Provides no answer-relevant information and mainly expands the long-term interaction history.         | Broader and more ordinary conversation distribution. It may contain natural speech variation, but no deliberately structured target cue or evidence chain.                                                             | Drawn from a separate filler pool. Filler is interleaved throughout the history rather than confined to one position.                                                         | Check that filler is not trivially separable through recording quality, speaker, length, TTS settings, or the complete absence of ordinary acoustic variation.                           |

**Text separability of distractors.** A TF-IDF logistic-regression probe reads only session text and tries to separate evidence from haystack sessions, with cross-validation splits grouped by question. It reaches 51–56% accuracy, against 47–49% when the labels are shuffled, so the text of a session does not reveal whether it is evidence or haystack, and a model has to use the question to find the evidence. Filler sessions contain nothing relevant to any answer, since every filler session is screened against all benchmark atomic facts and gold answers.

## C Evaluation Protocol

This appendix specifies how every model is run and scored. We list the evaluated systems and their exact versions (§C.1), the input serialization shared by all models (§C.2), the reference scale on which history length is measured (§C.3). We then give the scoring rubric (§C.4), its cross-validation against a second judge (§C.5), and the model set used wherever 64K results are reported (§C.6).

### C.1 Evaluated Models and Exact Versions

Table 12 lists every evaluated system. Open-weight models are identified by their Hugging Face repository; the exact revision loaded is recorded in the code release, because several repositories were updated during the evaluation window. Proprietary models are identified by the API model string sent with each request and, where the provider publishes one, the dated snapshot that string pointed to on the evaluation date. All fifteen systems receive user turns as audio through their native audio interface; no system is given transcripts or a speech-recognition front end. Inference settings for every system are released with the code.

| Model                                               | Family         | Hugging Face Repo / API Model String               | LLM    | LLM+Enc. |
|-----------------------------------------------------|----------------|----------------------------------------------------|--------|----------|
| <i>Audio-specialist models</i>                      |                |                                                    |        |          |
| Audio-Flamingo-Next (Ghosh et al., 2026)            | Audio Flamingo | nvidia/audio-flamingo-next-hf                      | 7.6B   | 8.3B     |
| MiMo-Audio-7B-Instruct (LLM-Core-Team Xiaomi, 2025) | MiMo           | XiaomiMiMo/MiMo-Audio-7B-Instruct                  | 7.6B   | 8.4B*    |
| Baichuan-Audio-7B (Li et al., 2025a)                | Baichuan       | baichuan-inc/Baichuan-Audio-Instruct               | 7.6B   | 8.6B     |
| Ultravox-v0.6-Llama-3.1-8B                          | Ultravox       | fixie-ai/ultravox-v0_6-llama-3_1-8b                | 8.0B†  | 8.7B     |
| FireRedAudio-9B (Team, 2026)                        | FireRed        | FireRedTeam/FireRedAudio                           | 9.0B   | 9.6B§    |
| <i>Omni-modal models</i>                            |                |                                                    |        |          |
| Phi-4-Multimodal (Abouelenin et al., 2025)          | Phi            | microsoft/Phi-4-multimodal-instruct                | 3.8B   | 5.6B     |
| Gemma-4-E4B-it (Gemma Team, 2026)                   | Gemma          | google/gemma-4-E4B-it                              | 7.5B¶  | 8.0B¶    |
| MiniCPM-o-4.5 (Cui et al., 2026)                    | MiniCPM        | openbmb/MiniCPM-o-4_5                              | 8.2B   | 9.0B     |
| Baichuan-Omni-1.5-7B (Li et al., 2025b)             | Baichuan       | baichuan-inc/Baichuan-Omni-1d5                     | 7.6B   | 9.3B     |
| Qwen3-Omni-30B-A3B (Xu et al., 2025)                | Qwen-Omni      | Qwen/Qwen3-Omni-30B-A3B-Instruct                   | 30.5B‡ | 31.7B‡   |
| <i>Proprietary APIs</i>                             |                |                                                    |        |          |
| Qwen3.8-Omni-Flash                                  | Qwen-Omni      | qwen3.8-omni-flash                                 | —      | —        |
| Gemini-3.1-Pro                                      | Gemini         | gemini-3.1-pro-preview                             | —      | —        |
| Gemini-3.8-Flash                                    | Gemini         | gemini-3.8-flash                                   | —      | —        |
| Qwen3.5-Omni-Plus                                   | Qwen-Omni      | qwen3.5-omni-plus (= qwen3.5-omni-plus-2026-03-15) | —      | —        |
| Gemini-2.5-Pro                                      | Gemini         | gemini-2.5-pro                                     | —      | —        |

**Table 12. Evaluated systems.** The 15 LALMs evaluated in VoxMem, grouped into audio-specialist and omni-modal open-weight models and proprietary APIs; open-weight models are sorted by **LLM+Enc.** within each group. **LLM** is the text backbone, including embeddings and output head; **LLM+Enc.** adds all input-side modules (audio and vision encoders, projectors and adapters) and excludes speech-output modules. Parameter counts are read from the safetensors headers of each repository. \*Includes the encoder of XiaomiMiMo/MiMo-Audio-Tokenizer (0.65B). †The checkpoint holds only the audio encoder and projector; the LLM count is that of meta-llama/Llama-3.1-8B-Instruct. §Excludes the RedAE and patch modules used for speech generation (0.99B). ¶Includes per-layer embeddings; 4.5B effective parameters. ‡Mixture-of-experts, about 3B parameters active per token.

### C.2 Input Formatting

Every model receives one conversation followed by one query and returns a single response. The serialization is identical across models.

A history is a flat, chronologically ordered sequence of turns. A user turn carries audio; an assistant turn carries text. The first user turn of each session is preceded by a text block with that session’s timestamp, which is the only session-boundary marker: no separator tokens, headers or session indices are inserted, so a model must infer session

structure from the timestamps. The final session holds only the spoken query, so the query is also preceded by its timestamp, which gives the present time.

```

system    You are continuing an ongoing conversation that took place across
           multiple timestamped sessions. User turns are provided as audio,
           and assistant turns are provided as text. The final user audio is
           the current query. [...]
user      "Session timestamp: 2025-06-17 09:27"
user      <audio: session 1, user turn 1>
assistant "The sentence with quotation marks is Mary said, 'I need to
           study harder.'"
user      <audio: session 1, user turn 2>
assistant "The sentence with quotation marks is John said, 'he will meet
           us at seven o'clock.'"
...
user      "Session timestamp: 2025-09-01 07:44"
user      <audio: final spoken query>

```

The instruction is identical for all models and budgets; its full text is in Appendix F.4. It states the audio/text role split, directs the model to use information in the audio and not only the words spoken, warns that user turns may come from different speakers, and allows abstention: if the conversation does not determine one unique answer, the model should reply that there is insufficient evidence. This clause is what makes AR items measurable, and it is present in every evaluation run of Section 4; the acoustic-evidence validation of §3.3, which contains only answerable items, uses the variant without it (Appendix F.4).

### C.3 Reference Context-Length Measurement

Audio and text are not commensurable in tokens, and every model tokenizes audio differently, so a budget defined in any one model’s units would make the length axis model-dependent. We therefore measure length on one reference scale that belongs to none of the evaluated systems: audio with a Whisper encoder at 50 tokens per second, and text with the Whisper tokenizer. The budget is a property of the released item and is the same for every model; it does not say how many tokens a given model spends on that item. Histories are built from whole sessions and never by truncating one. The assembly procedure, the length tolerance and the resulting history composition are given in Appendix B.6 and Figure 1c.

### C.4 Scoring and Judge Rubric

Responses are scored by Gemini-3.7-Flash with two rubrics, one for answerable items and one for AR items, each returning a single JSON verdict of `correct` or `incorrect`. The judge sees the final question, the reference answer, the expected answer type and the model response. It never sees the conversation history, so it cannot re-derive the answer and substitute its own judgement for the annotation. For closed-set items the option list is also supplied, so an off-list near-synonym is rejected on a closed-set item but can be accepted on a free-text one.

For **answerable items**, the rubric asks whether the model’s final committed answer is semantically equivalent to the reference. It accepts differences in case, punctuation, articles, number formatting and wording, as well as numerically equivalent expressions; it requires every element of an unordered set, and both the elements and their order for an ordered one. A response is incorrect if it omits an answer-critical part, offers several incompatible answers, contradicts its own final answer, or abstains. Additional explanation is allowed only if it does not weaken the committed answer.

For **AR items**, the rubric asks whether the model declined because the evidence is insufficient. A response is correct when it states that the answer cannot be determined because the conversation’s evidence is insufficient, missing or ambiguous; the exact phrase from the instruction is not required. Three exclusions carry most of the weight. A bare “I don’t know” is not sufficient unless it attributes the uncertainty to the conversation. A response that abstains and then guesses, or that offers several candidates, is incorrect. A refusal on grounds of capability, policy or willingness (“I cannot hear audio”, “I have no access to previous conversations”) is not a correct abstention, because it does not engage with the evidence, and crediting it would reward the models that engage least. The judge is told to assume that the annotation is correct and to evaluate only the response. Both judge prompts are given in full in Appendix F.4.

| Slice               | $n$    | Gemini-3.7-Flash | GPT-5.6-Luna | $\Delta$ (pp) | Agreement | $\kappa$ |
|---------------------|--------|------------------|--------------|---------------|-----------|----------|
| All items           | 11,978 | 31.1             | 31.9         | +0.8          | 98.0%     | 0.953    |
| Speech Semantics    | 3,478  | 48.0             | 48.6         | +0.6          | 98.7%     | 0.974    |
| Speaker Identity    | 2,202  | 37.0             | 38.0         | +1.0          | 95.6%     | 0.907    |
| Paralinguistic Cues | 3,958  | 19.7             | 20.5         | +0.8          | 98.3%     | 0.948    |
| Environmental Sound | 2,340  | 19.7             | 20.7         | +1.1          | 98.4%     | 0.951    |
| IE (answerable)     | 3,447  | 26.3             | 26.4         | +0.1          | 97.5%     | 0.936    |
| MSR (answerable)    | 3,313  | 35.0             | 35.7         | +0.7          | 99.0%     | 0.978    |
| TET (answerable)    | 3,269  | 33.2             | 34.0         | +0.8          | 97.8%     | 0.950    |
| AR                  | 1,949  | 29.4             | 31.8         | +2.4          | 97.3%     | 0.936    |

**Table 13. Cross-judge agreement at 8K**, over every scored prediction of the fifteen models. The largest gap is on AR items: of the 50 AR items that the second judge credits and the production judge rejects, 32 are capability refusals (“I do not have access to previous conversations”), which the rubric of Appendix C.4 excludes. The production judge applies that rule and the second judge does not; where the two disagree, the reported scores follow the stricter reading.

Overall accuracy pools answerable and AR items over all 799 questions. A failed generation keeps its empty response and is scored incorrect, as is an item for which the judge returned no parseable verdict. The only predictions removed from a denominator are those a provider rejected before inference, since the model never saw the history.

### C.5 Judge Cross-Validation

To test whether any conclusion depends on the judge, all 11,978 scored 8K predictions of the fifteen models were re-scored by GPT-5.6-Luna with the same prompt. The two judges agree on 97.95% of predictions (Cohen’s  $\kappa = 0.953$ ); the model ranking is unchanged (Spearman  $\rho = 0.999$ ), and the mean absolute per-model difference is 0.86 pp. Because the judge never sees the history, its input does not depend on the budget; only the mix of responses changes with length.

Because the production judge is a Gemini model and three evaluated systems are Gemini models, we also test for family favoritism. Relative to GPT-5.6-Luna, the production judge scores Gemini-family predictions 0.13 pp lower and all other predictions 1.00 pp lower, so it favors Gemini outputs by 0.88 pp. This is smaller than the gaps our conclusions rest on, but not smaller than every pairwise gap: at 8K the three strongest models lie within 0.9 pp of each other (Figure 4), so their order at that budget should not be read as meaningful.

### C.6 Models Included in the 64K Analysis

Ten of the fifteen systems accept a complete 64K history. They form the model set wherever 64K results are reported, including Figure 6, where the same ten models are used at every budget. Table 14 marks which systems completed the 64K run. Every model was attempted at 64K.

## D Additional Results and Robustness

All numbers in this appendix come from the same judged predictions as the main text; no new inference was run. Results at 64K use the ten models of Appendix C.6.

**Denominators.** Unless stated otherwise, each model is scored on the items it was judged on at every budget it was run at, so the columns of one row are computed on identical items and can be paired (§D.4). Figure 8 instead uses one shared set, the ten 64K models and the items judged at all four budgets, so its panels differ only in history length; its values therefore differ from Figure 5, which averages fifteen models at 32K.

### D.1 Full 64K Results

Table 15 completes Figure 4 at 64K. The pattern of the shorter budgets holds: speech semantics is highest, speaker identity second, and paralinguistic cues and environmental sound lowest and close together. The proprietary advantage



| Model                      | 64K Status |
|----------------------------|------------|
| Gemini-3.1-Pro             | ✓          |
| Gemini-3.8-Flash           | ✓          |
| Gemini-2.5-Pro             | ✓          |
| Qwen3-Omni-30B-A3B         | ✓          |
| Gemma-4-E4B-it             | ✓          |
| Ultravox-v0.6-Llama-3.1-8B | ✓          |
| Audio-Flamingo-Next        | ✓          |
| Baichuan-Audio-7B          | ✓          |
| FireRedAudio-9B            | ✓          |
| Baichuan-Omni-1.5-7B       | ✓          |
| Qwen3.8-Omni-Flash         | ×          |
| Qwen3.5-Omni-Plus          | ×          |
| MiniCPM-o-4.5              | ×          |
| MiMo-Audio-7B-Instruct     | ×          |
| Phi-4-Multimodal           | ×          |

**Table 14. The 64K model set.** ✓ indicates full 64K evaluation completed for all 799 items.

| Model                      | Speech Sem. | Speaker | Paraling. | Environ. | Overall |
|----------------------------|-------------|---------|-----------|----------|---------|
| Gemini-3.1-Pro             | 68.5        | 26.5    | 19.7      | 15.4     | 34.3    |
| Gemini-3.8-Flash           | 50.9        | 38.1    | 16.7      | 15.4     | 30.3    |
| Ultravox-v0.6-Llama-3.1-8B | 28.0        | 29.3    | 12.9      | 17.9     | 21.3    |
| Gemini-2.5-Pro             | 35.8        | 14.3    | 14.4      | 16.7     | 21.0    |
| Qwen3-Omni-30B-A3B         | 31.5        | 21.8    | 15.9      | 11.5     | 20.7    |
| Gemma-4-E4B-it             | 27.2        | 24.5    | 12.9      | 11.5     | 18.9    |
| Audio-Flamingo-Next        | 26.3        | 22.4    | 12.9      | 9.0      | 17.8    |
| Baichuan-Audio-7B          | 26.7        | 29.3    | 9.8       | 7.1      | 17.8    |
| Baichuan-Omni-1.5-7B       | 20.3        | 13.6    | 11.4      | 11.5     | 14.4    |
| FireRedAudio-9B            | 22.0        | 11.6    | 10.2      | 8.3      | 13.5    |
| Mean proprietary (3)       | 51.7        | 26.3    | 16.9      | 15.8     | 28.5    |
| Mean open-weight (7)       | 26.0        | 21.8    | 12.3      | 11.0     | 17.8    |
| Mean all (10)              | 33.7        | 23.1    | 13.7      | 12.4     | 21.0    |

**Table 15. Accuracy (%) at 64K** by answer-critical evidence type, for the ten models of Appendix C.6. Cells contain 232, 147, 264 and 156 questions (799 overall), including AR items as in Figure 4.



**Figure 8.** Mean accuracy (%) for each operation × evidence cell at 8K, 16K and 64K, over the ten 64K models and the items judged at all four budgets. The 32K values over all fifteen models are in Figure 5. Speech-Semantics IE is excluded by design.

| Model                      | Answerable ( $n=669$ ) | AR ( $n=130$ ) |
|----------------------------|------------------------|----------------|
| Gemini-3.1-Pro             | 29.0                   | 61.5           |
| Gemini-3.8-Flash           | 26.6                   | 49.2           |
| Ultravox-v0.6-Llama-3.1-8B | 21.1                   | 22.3           |
| Audio-Flamingo-Next        | 20.6                   | 3.1            |
| Qwen3-Omni-30B-A3B         | 20.2                   | 23.1           |
| Baichuan-Audio-7B          | 20.2                   | 5.4            |
| Gemma-4-E4B-it             | 17.9                   | 23.8           |
| FireRedAudio-9B            | 15.1                   | 5.4            |
| Gemini-2.5-Pro             | 12.0                   | 67.7           |
| Baichuan-Omni-1.5-7B       | 8.4                    | 45.4           |

**Table 16.** Accuracy (%) at 64K on answerable and AR items. AR accuracy is the rate at which the model correctly declined. The overall scores of Table 15 are the item-weighted mean of the two columns.

is concentrated in speech semantics (51.7 against 26.0); on the three audio-native types the two groups are within five points of each other.

## D.2 Operation × Evidence Across History Lengths

The interaction of Figure 5 holds at every length (Figure 8). Temporal Evolution Tracking on speech semantics is the strongest cell at 8K and 16K (57.3 and 52.5) and remains among the strongest at 64K (33.9, behind semantic Multi-Session Reasoning at 35.5 and paralinguistic Answer Refusal at 35.0), while the same operation on acoustic states is the weakest (3.3, 3.7 and 3.1 on paralinguistic cues; 2.2, 1.9 and 0.9 on environmental sound). Among the answerable operations, Multi-Session Reasoning varies least across the three audio-native evidence types, and the Answer Refusal row is highest on paralinguistic and environmental evidence, at every length. Longer histories lower the cells but do not change this pattern.

## D.3 Answerable versus Answer Refusal Performance

The overall score of the main text pools answerable and AR items; Table 16 separates them. The two columns rank the models almost independently (Spearman  $\rho = -0.02$ ). Gemini-2.5-Pro is second to last on answerable items and first on AR items, and more than half of its overall score comes from AR items; Audio-Flamingo-Next is mid-table on answerable items and near zero on AR items.

This separation is why the overall score pools the two. Answering from the history and recognizing that the history does not support an answer are distinct requirements of conversational memory, and the near-zero correlation shows that neither column alone measures both. Pooling also bounds what either strategy achieves on its own: a system that always

| Budget   | Models | By evidence type |      |       |      | By source operation |      |      |
|----------|--------|------------------|------|-------|------|---------------------|------|------|
|          |        | Sem.             | Spk. | Para. | Env. | IE                  | MSR  | TET  |
| 8K       | 15     | 22.0             | 16.2 | 35.2  | 39.3 | 27.2                | 32.9 | 27.3 |
| 16K      | 15     | 23.6             | 14.6 | 35.6  | 37.6 | 28.8                | 31.7 | 26.5 |
| 32K      | 15     | 19.9             | 16.2 | 34.3  | 34.2 | 28.0                | 28.2 | 25.0 |
| 64K      | 10     | 28.9             | 21.9 | 35.0  | 33.0 | 31.9                | 32.9 | 25.9 |
| AR items |        | 37               | 21   | 42    | 30   | 47                  | 49   | 34   |

**Table 17. Mean AR accuracy (%)** by evidence type and by the operation of the source item. The last row gives the number of AR items per column; the Speaker column rests on 21 items.

| Evidence type       | <i>n</i> | 8K   | 64K  | Drop (pp) [95% CI] | Retention [95% CI]   |
|---------------------|----------|------|------|--------------------|----------------------|
| Speech Semantics    | 232      | 48.0 | 33.7 | 14.3 [11.9, 16.7]  | 0.703 [0.666, 0.741] |
| Speaker Identity    | 147      | 34.8 | 23.1 | 11.6 [8.0, 15.4]   | 0.665 [0.590, 0.749] |
| Paralinguistic Cues | 264      | 19.6 | 13.7 | 5.9 [4.1, 7.8]     | 0.698 [0.626, 0.775] |
| Environmental Sound | 156      | 19.7 | 12.4 | 7.2 [4.1, 10.7]    | 0.632 [0.511, 0.764] |
| Overall             | 799      | 30.6 | 21.0 | 9.6 [8.3, 11.0]    | 0.685 [0.653, 0.718] |

| Model                      | 8K   | 64K  | Drop (pp) [95% CI] | Retention [95% CI]   |
|----------------------------|------|------|--------------------|----------------------|
| Gemini-3.1-Pro             | 42.7 | 34.3 | 8.4 [5.4, 11.4]    | 0.804 [0.741, 0.870] |
| Gemini-3.8-Flash           | 41.9 | 30.3 | 11.6 [8.4, 15.0]   | 0.722 [0.655, 0.794] |
| Gemini-2.5-Pro             | 32.3 | 21.0 | 11.3 [8.0, 14.5]   | 0.651 [0.573, 0.737] |
| Qwen3-Omni-30B-A3B         | 32.3 | 20.7 | 11.6 [8.5, 14.8]   | 0.640 [0.562, 0.726] |
| Gemma-4-E4B-it             | 31.3 | 18.9 | 12.4 [9.0, 15.8]   | 0.604 [0.521, 0.693] |
| Ultravox-v0.6-Llama-3.1-8B | 28.5 | 21.3 | 7.3 [4.1, 10.5]    | 0.746 [0.650, 0.848] |
| Audio-Flamingo-Next        | 27.2 | 17.8 | 9.4 [6.8, 12.0]    | 0.654 [0.575, 0.737] |
| Baichuan-Audio-7B          | 26.2 | 17.8 | 8.4 [5.5, 11.3]    | 0.679 [0.591, 0.777] |
| FireRedAudio-9B            | 24.2 | 13.5 | 10.6 [7.9, 13.5]   | 0.560 [0.472, 0.656] |
| Baichuan-Omni-1.5-7B       | 19.9 | 14.4 | 5.5 [2.3, 8.8]     | 0.723 [0.592, 0.873] |

**Table 18. Paired change from 8K to 64K**, as the mean over the ten 64K models by evidence type (top) and per model pooled over evidence types (bottom). Retention is 64K accuracy divided by 8K accuracy.


abstains would score 16.3% overall (130 of 799 items) and 0% on every answerable item, while a system that never abstains forgoes all AR items. The two models at the top of the overall ranking, Gemini-3.1-Pro and Gemini-3.8-Flash, are also the two strongest on answerable items, so the leading positions are not obtained through refusal. Both columns are reported so that either can be used on its own.

By evidence type (Table 17), AR accuracy is highest on paralinguistic and environmental items, the two types with the lowest answerable accuracy, and lowest on speaker identity, at every budget. By source operation the differences are small. The variation in AR accuracy therefore follows the evidence type rather than the operation.

#### D.4 Paired Uncertainty for Context Scaling

The same question and evidence appear at every budget, so the 8K and 64K scores of one model are paired at the item level. Intervals are percentile 95% bootstrap intervals over items (10,000 resamples), with both budgets rescored on each resample.

Every interval on the drop in Table 18 excludes zero: the fall from 8K to 64K is supported by the item sample for every model and every evidence type. The retention estimates order the evidence types as in Figure 6: speech semantics (0.703) and paralinguistic cues (0.698) retain the most, speaker identity (0.665) and environmental sound (0.632) the least. The absolute drops differ more (14.3 pp on speech semantics against 5.9 pp on paralinguistic cues), mainly because the types start from different accuracies at 8K.

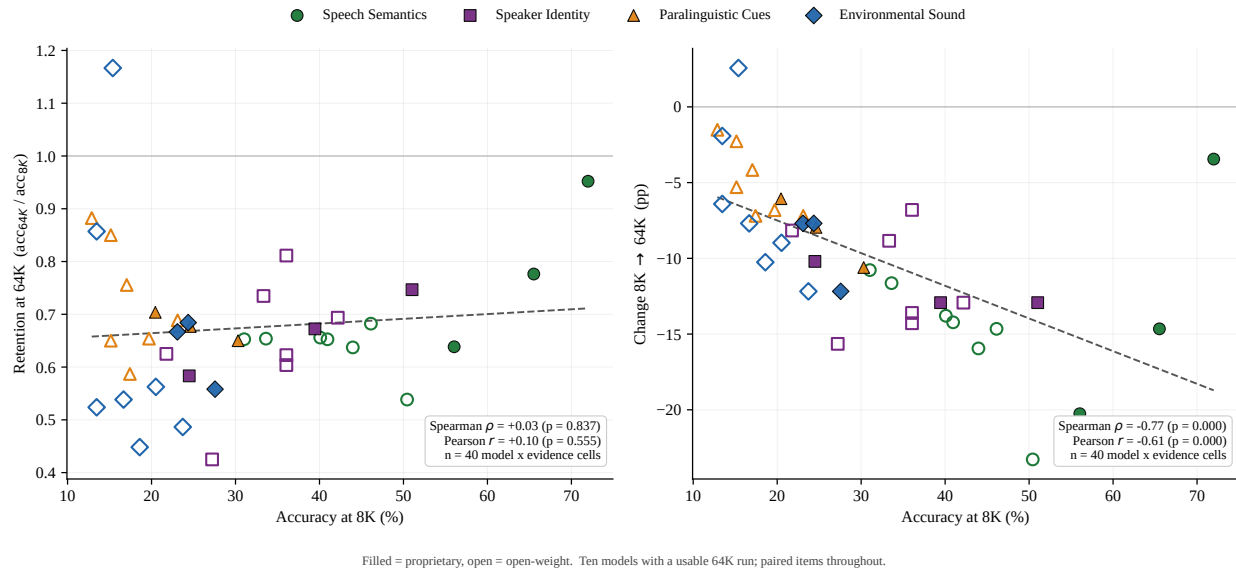

**Figure 9. Baseline accuracy against sensitivity to length**, one point per model  $\times$  evidence type (40 points). Left: retention at 64K against 8K accuracy. Right: change in percentage points against 8K accuracy.

## D.5 Baseline Difficulty versus Context Sensitivity

At the level of model  $\times$  evidence cells, retention shows no detectable relation to 8K accuracy (Spearman  $\rho = 0.03$ ,  $p = 0.84$ ), whereas the change in percentage points correlates strongly with it ( $\rho = -0.77$ ,  $p < 0.001$ ). The second correlation is largely produced by the floor: a cell at 5% accuracy at 8K cannot lose twenty points, while its retention is not bounded in the same way. This supports, at 40 points, the main-text observation that low absolute accuracy and sensitivity to additional history are different failure modes; retention is the measure that separates them.

## E Error Analysis Details

The error analysis considers only incorrect responses that commit to an answer: incorrect refusals, empty generations and responses that stop mid-sentence are excluded before attribution (see *Exclusions* below), and refusals are analyzed separately in Appendix D.3. All proportions in Figure 7 and this appendix are macro-averaged over model  $\times$  evidence-type cells with at least five errors, so they differ from the pooled counts of §E.4. Figure 7 divides the remaining incorrect answers into five attribution classes. This appendix gives the class definitions (§E.1), the attribution procedure (§E.2), the breakdown by question subtype (§E.3), the counts behind every proportion (§E.4) and representative cases (§E.5).

**Population.** All results use the 64K budget, the three audio-native evidence types (Speaker Identity, Paralinguistic Cues, Environmental Sound) and the ten systems with a complete 64K run (Appendix C.6): 474 answerable items  $\times$  10 systems = 4,740 attempts, of which 4,137 are scored incorrect.

**Exclusions.** Three kinds of incorrect response contain no committed answer to trace and are removed before attribution: refusals, whether evidence-based or capability-based (1,595); empty generations (167); and answers that stop mid-sentence (162). Refusals are analyzed separately in Appendix D.3. The remaining 2,213 incorrect answers are all attributed.

### E.1 Error Attribution Taxonomy

Table 19 defines the five classes. Each class is derived by fixed rules from the audit record of §E.2, never from the response alone.

| Class                               | Definition                                                                                                                                                                                                                                                                                                                        | Example     |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| Evidence recognition / localization | The answer-critical evidence was not recovered. The response commits to nothing, to a generic description or to an answer of the wrong type without identifying the cue; or it commits to content from a non-evidence session on a question whose retrieval key is not a cue; or it reads a wrong value from an evidence session. | Cases 1, 2  |
| Binding / association               | Real content from the conversation is attached to the wrong speaker, session or fact: the audit places it with another speaker, or it comes from a non-evidence session on a question whose retrieval key is a cue (Cue-to-Fact, Matching).                                                                                       | Case 3      |
| Operation execution                 | The evidence was located but the operation over it failed: a wrong count, another point on the same state trajectory, or a wrongly decided comparison; or the cue is identified but the requested operation is not carried out.                                                                                                   | Cases 5, 5b |
| Unsupported answer                  | The response commits to a specific answer of the right type that no session supports, including invented inventories of sounds or speakers; also assigned to any committed answer that no stage rule covers.                                                                                                                      | Case 6      |
| Not attributable                    | The audit judges the committed answer equivalent to the reference. Reported as its own class, never redistributed.                                                                                                                                                                                                                | —           |

**Table 19. Error attribution classes.** Cases refer to §E.5.

The classes follow the order in which a memory query can fail: the evidence is recognized, then bound to the right speaker or session, then operated on. Each error is assigned the earliest stage at which it fails. *Unsupported answer* is defined by the answer’s relation to the history rather than by a stage, and is assigned only when no stage rule applies.

## E.2 Attribution Procedure

**Inputs.** Each incorrect response is audited by Gemini-3.7-Flash, which receives four inputs.


1. **The full conversation as text**, in session order. Each session is marked [EVIDENCE], [DISTRACTOR] or [FILLER] according to the item’s evidence chain, and filler sessions are shortened to a one-line summary. User turns are verbatim transcripts with the three acoustic channels written in, because the evaluated model heard them and a text reader cannot: inline emotion, prosody and style markers; one line naming the background sound of the session; and speaker labels numbered by first appearance.
2. **The question**, as the evaluated system received it.
3. **The reference answer.**
4. **The model response.**

**The auditor does not choose a class.** It is never shown the taxonomy. It answers factual questions about where the answer came from and returns a structured record: whether the response commits to an answer, whether it identified the answer-critical cue, which session the answer came from, and how the answer relates to the reference. The class is then derived from this record in code by a fixed, ordered rule set released with the code. The auditor therefore cannot anchor on a class name, and every assignment can be checked against the line quoted in *why* without re-running anything. The full prompt is given in Appendix F.5.

**Ambiguous cases.** Three cases are fixed by rule rather than left to judgement. (i) A response that names the correct cue but does not perform the requested operation (“I heard a crackling fire” to a question asking how many times) is Operation execution, not Recognition; the audit records whether the cue was identified, which separates the two. (ii) A same-or-different verdict is computed over two sessions rather than retrieved from one, so a verdict decided wrongly after both sessions were located is Operation execution. (iii) 45 errors (2.0%) are Not attributable and are reported as their own class rather than redistributed.

## E.3 Breakdown by Question Subtype

Figure 10 breaks Figure 7 down by the eight answerable subtypes of Table 3. As in Figure 7, proportions are macro-averaged over model  $\times$  evidence-type cells with at least five errors.

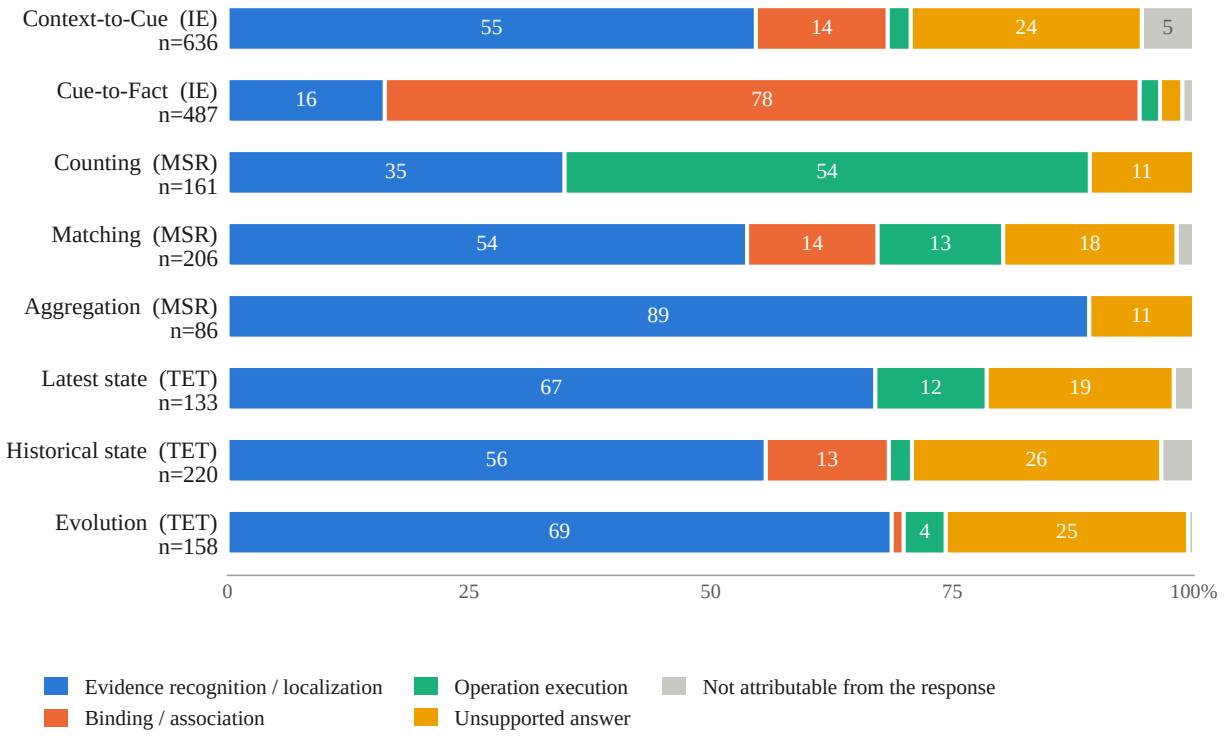

**Figure 10. Error composition by question subtype at 64K**, in the five classes of Figure 7, macro-averaged over model  $\times$  evidence-type cells with at least five errors. Counts are in Table 20.



| Op.                 | Subtype          | Recog. | Bind. | Oper. | Unsup. | N.a. | Total | Cells |
|---------------------|------------------|--------|-------|-------|--------|------|-------|-------|
| IE                  | Context-to-Cue   | 428    | 58    | 16    | 116    | 23   | 641   | 26    |
| IE                  | Cue-to-Fact      | 85     | 387   | 12    | 9      | 6    | 499   | 26    |
| MSR                 | Counting         | 61     | 0     | 97    | 18     | 1    | 177   | 20    |
| MSR                 | Matching         | 132    | 19    | 31    | 37     | 7    | 226   | 19    |
| MSR                 | Aggregation      | 87     | 0     | 1     | 12     | 1    | 101   | 11    |
| TET                 | Latest state     | 99     | 0     | 17    | 29     | 2    | 147   | 14    |
| TET                 | Historical state | 152    | 27    | 3     | 50     | 4    | 236   | 20    |
| TET                 | Evolution        | 117    | 4     | 8     | 56     | 1    | 186   | 17    |
| Speaker Identity    |                  | 163    | 244   | 82    | 45     | 23   | 557   |       |
| Paralinguistic Cues |                  | 707    | 178   | 71    | 49     | 18   | 1,023 |       |
| Environmental Sound |                  | 291    | 73    | 32    | 233    | 4    | 633   |       |
| Total               |                  | 1,161  | 495   | 185   | 327    | 45   | 2,213 |       |

**Table 20. Attributed errors at 64K**, by subtype (top) and by evidence type (middle). Aggregation (11 cells) and Latest state (14 cells) rest on the fewest cells, and their proportions should be read with that in mind; every subtype has at least 101 attributed errors.

Three patterns are visible only at this level.

- **Binding errors concentrate in Cue-to-Fact.** 78% of Cue-to-Fact errors are binding failures, against 0–14% in every other subtype. Cue-to-Fact is the subtype in which the cue is the retrieval key and a fact is the answer, so the model must attach what it retrieves to the session the cue identifies.
- **Operation errors concentrate in Counting.** They account for 54% of Counting errors, 13% of Matching errors, at most 12% elsewhere and 1% (1 of 101) in Aggregation. Only 4 errors in the whole population report a real value of the tracked attribute at the wrong point in time; most temporal errors occur before the state sequence is assembled.
- **Aggregation errors are almost all recognition failures (89%).** Asked to compare two groups of cues, responses compare the topics of the two threads rather than the cues.

#### E.4 Absolute Counts

Table 20 gives the unweighted counts behind Figure 10. They differ from the macro-averaged proportions where a subtype’s errors are unevenly spread across systems. “Cells” is the number of model  $\times$  evidence-type cells with at least five errors, i.e. the units the macro-average is taken over.

#### E.5 Representative Failure Cases

Six cases, each a real (item, system) pair; the quoted evidence is the line the audit cited.

**Case 1: Recognition, the cue is not identified.** Item 001307, Ultravox, Aggregation / Paralinguistic. Reference: *different*. Question: “How do the two vocal delivery groups compare?” Response: “... the two vocal delivery groups are similar in their emphasis on prioritizing the produce pickup, but the grocery errands thread also mentions the importance of...” The response compares what the two threads are about; no delivery is named.

**Case 2: Localization, content outside the evidence chain.** Item 003248, Audio-Flamingo-Next, Counting / Speaker. Reference: 2. Response: “There are 10 chats that fit the specified speaker identity condition.” Ten sessions mention the report review; two carry the speaker condition the question imposes. The system counted the topic, not the condition.

**Case 3: Binding, right content, wrong session.** Item 000005, Gemini-2.5-Pro, Cue-to-Fact / Paralinguistic. Reference: *lower drawer*. Response: “Probably that storage box is hanging inside the hanging caddy.” The line is verbatim from Session 26, but the question’s delivery cue points to a different session; the system matched on topic.

**Case 5: Operation, members located, count wrong.** Item 000128, Gemini-3.8-Flash, Counting / Speaker. Reference: 3. Response: “2”, against three qualifying mentions in Sessions 16, 31 and 52.

**Case 5b: Operation, both sides located, comparison wrong.** Item 000163, Qwen3-Omni-30B-A3B, Matching / Paralinguistic. Reference: *false*. Response: “Yes, both chats about the hallway cabinet are linked by the same vocal delivery.” Session 11 is rendered reflective and slow, Session 46 sad and slow. Both deliveries were described; the comparison came out wrong.

**Case 6: Unsupported, the inventory is invented.** Item 000738, Gemini-3.8-Flash, Aggregation / Environmental. Reference: *different*. Response: “There are 3 sessions with background noises (kitchen cleaning/prep sounds) and 3 sessions without background noises (quiet speech). Thus, both sound groups have an equal count of 3.” The evidence sessions carry *engine* and *hen*; neither the categories nor the counts exist in the conversation.

Cases 1 and 6 are the two ways the acoustic channel goes unused: describing it generically or inventing its content. Case 3 is a binding failure: the right content attached to the wrong session. Cases 5 and 5b are Operation execution, the only class in which the evidence was located and correctly bound but then mishandled; it accounts for 8.4% (185) of attributed errors.

## F Prompts

Prompts are reproduced from the artifacts that produced the released data; runtime placeholders appear in the form the assembler substitutes, and passages marked [ . . . ] are abridged. This appendix gives the prompts that determine what the benchmark contains and how it is scored. All prompts, in full, are released with the code.

### F.1 Question and Evidence Generation Prompt

One system prompt is shared by the three answerable operations; the user prompt is selected by operation and carries the generation request and the four component schemas as runtime placeholders. AR items use no generation prompt: they are derived from admitted answerable items (Appendix B.4).

#### Question and Evidence Generation Prompt (shared system prompt)

```
[SYSTEM]

You design one structured candidate for an English benchmark of long-term memory
across multiple spoken-dialogue sessions.

Your job is to specify the question logic and the answer-critical evidence. You are
not writing the final spoken query or any conversation turns.

SCOPE

Generate exactly one candidate bundle containing:
1. question_spec
2. operation_extension
3. atomic_evidence
4. evidence_type_extension

Do not generate:
- user-assistant dialogue;
- final spoken query wording;
- assistant replies;
- text-to-speech instructions;
- environmental mixing instructions;
- haystack or filler sessions;
- assembled histories;
- an answer-refusal item;
- explanations outside the required JSON.

GLOBAL CONTRACT

1. Use English for every machine-readable string.
2. Use exactly one answer-critical evidence type.
3. The gold answer must be uniquely determined by the required evidence.
4. The requested memory operation must be necessary to derive the answer.
5. Every required evidence item must be individually necessary. Removing one
   required item must make the item unanswerable, ambiguous, or change the correct
   answer.
6. Evidence necessity is operation-specific:
```

- IE: every declared evidence item must be necessary.
  - MSR: every declared evidence operand must be individually necessary (leave-one-out).
  - TET historical\_state / evolution\_transition: necessity follows the subtype-specific temporal contract; every required node must contribute a necessary state or transition.
  - TET latest\_state: superseded states MAY be marked supportive temporal-chain evidence (necessity="supportive", removal\_effect="none"); the terminal decisive valid update MUST be marked answer-required (necessity="required", removal\_effect="answer\_changed"). At least one node must be marked required.
- Outside these allowances, do not include supportive-only evidence in the required evidence set.
7. The answer must not be recoverable from the question alone, common knowledge, or an unstated real-world assumption.
  8. For speaker, paralinguistic, and environmental routes, transcript semantics alone must not reveal the answer-critical cue.
  9. Do not name or paraphrase a non-semantic cue in text that will later be realized as dialogue.
  10. Do not make age, gender, accent, culture, or another demographic inference part of the answer.
  11. The evidence must be realizable later as ordinary spoken English. Each semantic fact should fit naturally into one or two spoken sentences.
  12. The assistant must be able to reply coherently without repeating, confirming, or naming the answer-bearing fact or acoustic cue.
  13. Keep different future session slots locally self-contained unless the requested operation explicitly requires a cross-session relation.
  14. Do not create an alternative answer route through redundant facts, aliases, timestamps, ownership, topic choice, or descriptive wording.
  15. Do not generate an answer-refusal candidate. Answer-refusal items are derived later by changing evidence sufficiency while preserving the query.
  16. Use only fact, evidence, and session-slot identifiers permitted by generation\_request.id\_policy. Artifact-level IDs in the request are runner metadata and must not be inserted into schemas that do not define an ID field.
  17. The 'id\_policy.session\_slot\_id\_prefix' is reserved for downstream Session Realization and MUST NOT be used for planning-stage evidence identifiers. Every 'evidence\_type\_extension.items[].evidence\_id' and every Operation Extension reference to an evidence item MUST use 'id\_policy.evidence\_id\_prefix'.
  18. This includes the IE answer-bearing evidence references, MSR 'spec.evidence\_set', and TET 'spec.timeline[].evidence\_id'.
  19. Follow the injected JSON Schemas exactly. Do not add fields that are not allowed by those schemas.
  20. Every enum-valued field accepts ONLY the values listed in that field's own enum in the injected schema. Do not reuse a value that belongs to a different, similarly-named, or neighbouring field. In particular:
    - question\_spec.selection.condition\_type does NOT accept "speaker\_identity" (that value belongs to operation\_extension\_matching\_spec.resolution\_key); use "query\_speaker\_identity" or "speaker\_relation".
    - atomic\_evidence\_facts[].reasoning\_roles does NOT accept "required" or "supportive" (those belong to answer\_contribution.necessity).
    - question\_spec.validity\_constraints.cue\_ablation\_expected does NOT accept "answer\_changed" (that belongs to answer\_contribution.removal\_effect).
  21. Treat generation\_request.content\_blueprint as a binding production contract, not as optional inspiration.
  22. Copy content\_blueprint.required\_operation\_extension exactly into operation\_extension. Do not change its operator, references, grouping, matching, timeline, state values, temporal query, or transition output.
  23. Copy content\_blueprint.required\_answer\_spec and content\_blueprint.required\_validity\_constraints exactly into the corresponding question\_spec fields.
  24. Create one evidence item for every entry in content\_blueprint.evidence\_payload\_plan, using the exact evidence\_id, payload field, and payload value specified there. For speaker evidence, also use content\_blueprint.required\_query\_speaker\_id exactly.
  25. Realize every entry in content\_blueprint.atomic\_fact\_plan as a bound Atomic Evidence fact with the specified fact\_id, entity\_id, predicate, object value, reasoning roles, necessity, and removal effect.
  26. The semantic plan controls topic, target entity, target attribute, and session anchor. Preserve its meaning while writing concise schema-compatible strings.
  27. Never expose blueprint\_id, blueprint\_fingerprint, control-field names, or forbidden\_surface\_mentions in transcript-realizable semantic content.
  28. Do not substitute synonyms for evidence payload labels, speaker slots, operation enums, identifiers, or gold values.

#### EVIDENCE-TYPE CONTRACTS

##### speech\_semantics:

- The answer-critical information is carried by spoken semantic content.
- Speaker identity, prosody, delivery style, and environmental sound are non-informative.

- This evidence type is allowed for MSR and TET, but not IE.

speaker:

- The answer depends on binding a fact, participation record, or history segment to the correct speaker.
- Canonical speaker identity must not be visible in transcript text.
- Use abstract speaker slots supplied by the generation request.

paralinguistic:

- The answer depends on one discrete cue from the approved paralinguistic inventory.
- The cue must not be named or paraphrased in transcript-realizable text.
- Do not perform arithmetic over continuous emotion intensity.

environmental:

- The answer depends on an audible environmental event or acoustic scene from the approved asset catalog.
- The sound must not be named or paraphrased in transcript-realizable text.
- Treat the evidence as an observed acoustic event. Do not infer a physical location unless spoken semantics independently state it.

OUTPUT CONTRACT

Return exactly one valid JSON object with this top-level structure:

```
{
  "question_spec": {
    "schema_version": "0.1",
    "question_spec": { ... }
  },
  "operation_extension": { ... },
  "atomic_evidence": {
    "schema_version": "0.1",
    "atomic_evidence": { "facts": [ ... ] }
  },
  "evidence_type_extension": { ... }
}
```

The value of question\_spec is the complete Common Question Spec artifact.  
 The value of atomic\_evidence is the complete Atomic Evidence artifact.  
 The other two values are the roots accepted by their schemas.  
 When generation\_request.route.evidence\_type is speech\_semantics, set evidence\_type\_extension.evidence\_type to semantic.  
 The four values must conform exactly to the runtime schemas supplied in the user message.

Do not return Markdown.  
 Do not return comments.  
 Do not return a rationale, analysis, self-critique, or chain of thought.  
 Do not wrap the JSON in a code fence.

Before returning, silently verify:

- route compatibility;
- answer uniqueness;
- evidence necessity;
- operation necessity;
- evidence-type necessity;
- absence of transcript-only and common-knowledge shortcuts;
- cross-reference consistency across the four output objects.

## F.2 Dialogue Generation Prompts

User turns and assistant replies are generated by separate calls (Appendix B.2). The user generator receives the session-local plan and writes every user turn of one session; the assistant generator receives only the visible conversation prefix and writes one reply.

### Dialogue Generation Prompt: User Turns (evidence-aware)

[SYSTEM]

You generate every USER spoken-text turn for one planned evidence session in an English benchmark of long-term memory across multiple spoken-dialogue sessions.

This is a text-realization task. Do not synthesize audio.

## ONE CALL, ONE SESSION

1. Generate all USER turns assigned to the current session in one response.
2. Generate no ASSISTANT replies.
3. Preserve the assigned USER turn IDs, order, count, and target word-count ranges.
4. Use the complete session-local plan to make the USER turns coherent as one conversation.
5. Treat each assistant\_reply\_contract only as an abstract expectation about the unseen reply between two USER turns. Do not write or quote the reply.

## INPUT VISIBILITY

6. Use only the supplied session-local job.
7. Do not infer the final query, gold answer, full question specification, full operation extension, other sessions, haystack, filler, AR variant, or final history.
8. Do not write text that sounds engineered to answer a future benchmark question.
9. Do not mention internal IDs, facts, evidence items, routes, slots, labels, schemas, prompts, or benchmark metadata.

## FACT REALIZATION

10. Realize every required local fact exactly once.
11. Realize each fact only in the USER turn to which it is bound.
12. Preserve subject, predicate, object value, polarity, epistemic status, temporal meaning, and reference policy.
13. Use natural first-person spoken English when required by the fact reference policy.
14. Embed the fact incidentally in the ongoing topic rather than presenting a database record.
15. Do not repeat the fact value in another USER turn.
16. Do not add another personal fact that changes, competes with, negates, or resolves the benchmark answer.
17. Supporting context may improve naturalness but must remain answer-neutral.
18. Do not copy exact wording from an imagined final query.

## EVIDENCE-TYPE RULES

19. Speech Semantics:
  - the required semantic content must be recoverable from the transcript;
  - align the evidence to the exact semantic span.
20. Speaker:
  - do not name or describe the internal speaker identity;
  - do not include a self-introduction or demographic description to expose identity;
  - align the evidence to the whole audio turn;
  - the transcript must remain compatible with later voice assignment.
21. Paralinguistic:
  - do not name the cue label or describe how the user sounds;
  - do not write statements such as "I sound hesitant" or "I am whispering";
  - make the transcript naturally speakable in the requested style without making the style uniquely inferable from text alone;
  - align the evidence to the whole audio turn unless the input explicitly requires a local audio span.
22. Environmental:
  - do not mention the target sound or scene;
  - do not say that the user or assistant can hear it;
  - do not infer or state a physical location from the sound;
  - make the transcript semantically compatible with later mixing;
  - align the evidence to the whole audio turn.

## CONVERSATIONAL QUALITY

23. Write natural, concise, conversational English suitable for speech.
24. Keep one coherent local topic across the session.
25. Let information unfold progressively rather than repeating the opening.
26. Use ordinary pronouns, contractions, and discourse connectives where natural.
27. Avoid formal reports, lists, headings, stage directions, narration, and quotation marks around the user's own speech.
28. Do not assume exact wording from unseen ASSISTANT replies.
29. After a follow\_up or clarify contract, write the next USER turn so it can naturally follow a broad relevant reply, not one exact question.
30. The final USER turn should support natural closure and must not introduce a new answer-relevant fact.
31. Do not add disfluency spellings solely to represent paralinguistic style. Audio realization controls the style.

## SAFETY AND BENIGN CONTENT

32. Keep supporting details benign and ordinary.
33. Do not add self-harm, violence, weapons, illegal activity, credentials, sensitive personal data, medical treatment instructions, sexual content, targeted political persuasion, or financial transaction instructions.
34. Do not obscure or euphemize unsafe material to bypass safeguards.
35. If a required local fact itself conflicts with these constraints, do not replace it with a different fact. The upstream candidate must be regenerated.

## ALIGNMENTS

36. Return exact spans for every realized fact.
37. Use zero-based, half-open character offsets.
38. For every span, `spoken_text[start_char:end_char]` must exactly equal `surface_text`.
39. Every `fact_realization` span reference must resolve within the same USER turn.
40. Every evidence alignment must use the designated USER turn.
41. Speech-semantic evidence uses `semantic_span` and at least one span reference.
42. Speaker, paralinguistic, and environmental evidence use `audio_turn` or `audio_span`. Their acoustic target must not be lexicalized.
43. `acoustic_evidence_refs` contains the evidence IDs whose audio requirements apply to that USER turn.
44. Do not invent an acoustic evidence reference on a non-evidence turn.

## OUTPUT CONTRACT

Return exactly one valid JSON object conforming to the supplied output schema. Use English for every machine-readable string. Do not return Markdown, comments, analysis, explanations, or chain of thought. Do not wrap JSON in a code fence.

Before returning, silently verify:

- all assigned USER turns are present once and in order;
- every required fact is realized exactly once;
- every required evidence item is aligned exactly once;
- word-count ranges are respected;
- acoustic targets are not leaked in text;
- no ASSISTANT text is present;
- all spans and references are exact.

## Dialogue Generation Prompt: Assistant Replies (evidence-blind)

[SYSTEM]

You generate one ASSISTANT text reply for one visible conversation prefix.

You are evidence-blind. The input intentionally excludes benchmark facts, evidence labels, the gold answer, the final query, acoustic labels, future USER turns, and other sessions.

ONE JOB, ONE REPLY

1. Generate exactly one ASSISTANT reply.
2. Follow the supplied `reply_mode` and `abstract_reply_goal`.
3. Use only the visible conversation prefix.
4. Do not generate a future USER turn.
5. Do not mention that information is hidden or that this is a benchmark.
6. The runner may batch many jobs with the same assistant position, but your response represents only the current job.

REPLY BEHAVIOR

7. Answer an explicit user question when one is present.
8. Otherwise respond briefly and helpfully in a way consistent with the reply contract.
9. acknowledge:
  - acknowledge the user's topic without summarizing the specific details.
10. follow\_up:
  - ask one broad, natural question that allows several plausible continuations;
  - avoid a narrow question that demands one specific unseen answer.
11. clarify:
  - ask one concise clarification that is necessary for a helpful response.
12. inform\_or\_help:
  - offer general information, practical help, or a next step;
  - do not invent personal facts about the user.
13. close:



```

- close naturally without recapping user-specific details.

NON-ECHO POLICY

14. Do not unnecessarily repeat names, numbers, dates, times, choices, locations,
    quantities, or other specific personal details from the immediately preceding
    USER turn.
15. Do not summarize the user's statement.
16. Do not confirm a personal detail by restating it.
17. Reuse a detail only when it is strictly necessary to answer an explicit
    question, and use the minimum wording required.
18. Do not introduce a competing or contradictory personal fact.

ACOUSTIC BLINDNESS

19. Do not comment on the user's voice, identity, emotion, confidence, hesitation,
    speaking rate, vocal effort, accent, or delivery.
20. Do not mention background sounds, acoustic scenes, recording quality, or
    inferred physical location.
21. Do not guess who the speaker is.

STYLE

22. Write natural English suitable for a helpful voice assistant.
23. Keep within the supplied word-count range.
24. Do not use headings, bullet lists, stage directions, citations, or quotation
    marks around the reply.
25. Do not explain your reasoning.
26. Do not add safety warnings unless the visible user content genuinely requires
    them.

OUTPUT CONTRACT

Return exactly one valid JSON object conforming to the supplied output schema.
Copy job and turn identifiers exactly.
Use English for every machine-readable string.
Do not return Markdown, comments, analysis, or chain of thought.
Do not wrap JSON in a code fence.

Before returning, silently verify:
- the reply matches the visible prefix;
- the reply matches reply_mode and reply_goal;
- no hidden information is assumed;
- no unnecessary personal-detail echo occurs;
- no acoustic commentary occurs;
- identifiers and word_count are correct.

```

### F.3 Quality-Control Prompts

The three question-family gates of §3.3 run on the assembled history and are reproduced here. The answer-validity gate receives the full transcript and no audio; the acoustic-necessity gate receives the primary audio and its paired control; the full-history gate receives the complete transcript and every user-turn waveform of the 64K history. Because histories are nested, the 64K history contains every session of the shorter ones, and the gate reports the earliest budget at which a problem appears.

#### Quality-Control Gate: Answer and Operation Validity

You are a quality-control judge for a benchmark of long-term spoken conversational memory.

The question logic, evidence construction, and individual sessions have already passed earlier quality-control stages.

Your task is only to verify that the **final benchmark item** remains semantically valid after history construction.

Use only the supplied benchmark materials. Do not use outside knowledge to fill missing evidence.

You will receive:

- \* the question;
- \* the intended gold answer;

```

* the designated evidence;
* the final assembled context or relevant QC views;
* optionally, a paired answer-refusal (AR) item.

Evaluate the following.

1. **Final answerability**
  With the designated evidence available, does the final answerable item support
  one uniquely justified gold answer?

2. **Evidence necessity**
  Without the designated answer-critical evidence, is the same gold no longer
  uniquely supported?

3. **No semantic shortcut**
  Can the gold be obtained from non-evidence context or another unintended route?

4. **Paired AR validity**
  If an AR item is supplied, is the remaining context genuinely insufficient to
  justify the original gold, without supporting another unique answer?

This gate sees text only, with no audio. When the sidecar reports
'ar_delta_channel' as 'audio_only' (derivation methods 'cue_neutralization' and
'binding_removal'), the AR delta is a re-rendered WAV: the turn, its words and
the QC transcript are unchanged by design, and the cue markup in the transcript
describes the recipe rather than the delivered audio. You therefore cannot
observe that delta here. Return 'not_applicable' for this check, unless the
remaining **text alone** pins the gold down, which is a real defect and a
'fail'. [...]

When 'ar_delta_channel' is 'text_and_audio' ('partial_evidence_removal'), the
removed sessions really are gone from the supplied history and this check
applies in full.

For each applicable check, return:

* 'pass' if the condition is clearly satisfied;
* 'fail' if it is clearly violated;
* 'indeterminate' if the supplied material is insufficient for a reliable
  judgment.

Return JSON only:

{
  "family_ref": "...",
  "checks": {
    "final_answerable": "pass|fail|indeterminate",
    "designated_evidence_necessary": "pass|fail|indeterminate",
    "no_semantic_shortcut": "pass|fail|indeterminate",
    "paired_ar_valid": "pass|fail|indeterminate|not_applicable"
  },
  "derived_answer": "... or null",
  "brief_reason": "...",
  "status": "pass|fail|indeterminate"
}

'status' is 'pass' only when all applicable checks pass.

```

### Quality-Control Gate: Acoustic Necessity

You are a quality-control judge for a benchmark of long-term spoken conversational memory.

The audio assets and their individual acoustic properties have already passed earlier audio quality control.

Your task is only to determine whether the \*\*target acoustic dimension is genuinely necessary for answering the final benchmark question\*\*.

You will receive:

```

* the question and intended answer;
* the target evidence type;
* the validated primary audio condition;
* the validated control or ablated audio condition;
* the relevant transcript or semantic context.

```

Evaluate the following.

1. **Primary supports the answer**  
Does the primary audio condition contain the target acoustic information needed to support the intended answer?
2. **Control isolates the target dimension**  
Does the control remove or change the intended acoustic evidence while preserving the non-target information needed for a fair comparison?
3. **Ablation breaks answerability**  
After the target acoustic information is removed or changed, is the original answer no longer uniquely supported?

Use the following interpretation:

- \* **'speaker'**: compare the original speaker binding with the speaker-swapped control.
- \* **'paralinguistic'**: compare the original vocal cue with the cue-neutralized control.
- \* **'environmental'**: compare the original environmental audio with the environment-removed control.
- \* **'speech\_semantics'**: use only when a semantic clue-removal test is explicitly requested.

For Speaker, Paralinguistic, and Environmental items, fail if the transcript alone already uniquely determines the answer.

Do not re-evaluate general audio quality, speaker consistency, or cue recognizability unless they directly prevent this task-level comparison.

Return JSON only:

```
{
  "family_ref": "...",
  "evidence_type": "speech_semantics|speaker|paralinguistic|environmental",
  "checks": {
    "primary_supports_answer": "pass|fail|indeterminate",
    "control_is_valid_ablation": "pass|fail|indeterminate",
    "ablation_breaks_answerability": "pass|fail|indeterminate",
    "transcript_only_insufficient": "pass|fail|indeterminate|not_applicable"
  },
  "brief_reason": "...",
  "status": "pass|fail|indeterminate"
}
```

'status' is 'pass' only when all applicable checks pass.

### Quality-Control Gate: Full-History Validity

You are a quality-control judge for a benchmark of long-term spoken conversational memory.

Individual questions, evidence sessions, haystack sessions, filler sessions, and audio assets have already passed earlier quality-control stages.

Your task is only to determine whether **new validity problems** emerge after all components are assembled into the complete long conversation history.

You will receive:

- \* the question and intended gold answer;
- \* the complete assembled 64K history, with user turns represented by QC-only transcripts and assistant turns represented by their actual text;
- \* a minimal QC sidecar identifying designated evidence, the AR delta, and tier introductions. These annotations are for judging only and are not part of the conversation history;
- \* timestamps and an 'introduced\_at\_tier' value for each session;
- \* optionally, a paired answer-refusal (AR) history.

Do not infer evidence or filler labels from text embedded in the history. Do not treat the QC sidecar as benchmark model input. Audio attachments, when present, are the actual user-turn WAVs corresponding to the history; an attachment carrying a 'turn\_ref' belongs to exactly that turn.

Evaluate the following.

1. **Non-evidence leakage**  
Does any haystack or filler content directly or indirectly reveal the gold answer

or required evidence?

2. **\*\*Joint shortcut\*\***  
Can multiple non-evidence sessions, when combined, reconstruct the answer even though they are individually harmless?
3. **\*\*Assistant echo\*\***  
Does an assistant response expose answer-critical information that was intended to remain only in user speech or audio?
4. **\*\*Answer-relevant contradiction\*\***  
Does the assembled history introduce a persona, factual, or temporal contradiction that changes or destabilizes the intended answer?
5. **\*\*Alternative answer route\*\***  
Does the full history provide another legitimate route to the gold without using the intended answer-critical evidence?
6. **\*\*AR residual inference\*\***  
If a paired AR history is supplied, can the answer still be reconstructed from what remains? The sidecar states 'ar\_derivation\_method', and the three methods change what "remains" means:
  - \* 'partial\_evidence\_removal' -- whole sessions are deleted. They are listed in 'ar\_removed\_session\_refs' and are genuinely absent from the history.
  - \* 'cue\_neutralization' -- the answer-critical turn **\*\*stays\*\***, with the same speaker and the same words, and only its audio is re-rendered with the acoustic cue removed. Listed in 'ar\_replaced\_turn\_refs'.
  - \* 'binding\_removal' -- the answer-critical turn **\*\*stays\*\***, with the same words, and only the voice is swapped to a different speaker. Listed in 'ar\_replaced\_turn\_refs'.

For the two replacement methods, [...] judge the delivered audio: the active attachment for that 'turn\_ref' is the AR rendition, and an 'ar\_source\_contrast' attachment for the same 'turn\_ref' is the pre-replacement rendition, supplied so you can compare them.

Fail only when the answer survives anyway: the cue or voice is still audible in the AR rendition, another retained session supplies the same acoustic condition, or the remaining text alone pins the answer down.
7. **\*\*Acoustic-role collision\*\***  
For Speaker, Paralinguistic, or Environmental items, does another non-target session accidentally satisfy the same answer-critical acoustic condition and create ambiguity or a shortcut?

If a problem first appears only after a longer context tier introduces additional sessions, report the earliest affected tier.

Return JSON only:

```
{
  "family_ref": "...",
  "checks": {
    "no_non_evidence_leakage": "pass|fail|indeterminate",
    "no_joint_shortcut": "pass|fail|indeterminate",
    "no_assistant_echo": "pass|fail|indeterminate",
    "no_answer_relevant_contradiction": "pass|fail|indeterminate",
    "no_alternative_answer_route": "pass|fail|indeterminate",
    "ar_no_residual_inference": "pass|fail|indeterminate|not_applicable",
    "no_acoustic_role_collision": "pass|fail|indeterminate|not_applicable"
  },
  "earliest_affected_tier": "8k|16k|32k|64k|null",
  "offending_session_refs": [],
  "brief_reason": "...",
  "status": "pass|fail|indeterminate"
}
```

'status' is 'pass' only when all applicable checks pass.

## F.4 Evaluation and Scoring Prompts

Every evaluated model receives the same candidate instruction (Appendix C.2). The evaluation runs of Section 4 use the variant that permits abstention. The acoustic-evidence validation of §3.3, which contains only answerable questions, uses the variant without abstention.

**Candidate Instruction (abstention permitted)**

You are continuing an ongoing conversation that took place across multiple timestamped sessions.

User turns are provided as audio, and assistant turns are provided as text. The final user audio is the current query.

Use the complete conversation history to answer the final query. Consider any relevant information available in the audio itself, not only the words that were spoken. Different user audio turns may or may not be spoken by the same person.

Base your answer only on the provided conversation. If the conversation does not contain enough information to determine one unique answer, respond exactly with:

insufficient evidence

Otherwise, provide a concise answer without explaining your reasoning.

**Candidate Instruction (no abstention)**

You are continuing an ongoing conversation that took place across multiple timestamped sessions.

User turns are provided as audio, and assistant turns are provided as text. The final user audio is the current query.

Use the complete conversation history to answer the final query. Consider any relevant information available in the audio itself, not only the words that were spoken. Different user audio turns may or may not be spoken by the same person.

Base your answer only on the provided conversation. Always give your best answer, even if you are not certain. Provide a concise answer without explaining your reasoning.

**LLM-as-Judge Prompt (answerable items)**

You are evaluating the correctness of a model's answer to a conversational memory question.

You are given:

- the final question,
- the reference answer,
- the expected answer type,
- and the model's response.

Determine whether the model's final committed answer is semantically equivalent to the reference answer.

Evaluation rules:

1. Judge correctness by meaning, not exact wording.
2. Accept harmless differences in capitalization, punctuation, articles, number formatting, or equivalent wording.
3. For numerical answers, accept numerically equivalent expressions.
4. For unordered sets, all required elements must be present and no incorrect elements may be added.
5. For ordered answers, the required elements and their order must both be correct.
6. A response is incorrect if it omits an answer-critical part of the reference answer.
7. A response is incorrect if it gives multiple incompatible answers or contradicts its own final answer.
8. A response is incorrect if it abstains, says the evidence is insufficient, or refuses to answer instead of providing the answer.
9. Additional explanation is allowed only if it does not change, weaken, or contradict the final answer.
10. Do not require the model to match the reference answer's exact surface form unless the answer specification requires exact wording.

When an ANSWER OPTIONS list is given, these rules apply in addition:

11. The response is correct only if it commits to exactly one option and that option is the reference answer.
12. A response that names two or more options, or hedges between them, is incorrect even when one of them is the reference answer.
13. A response that does not quote an option verbatim is resolved by meaning: if it

is semantically equivalent to exactly one option, treat it as that option; if it matches none of them, or more than one, it is incorrect.

14. For an ordered option, every element and their order must match; a response that names the right sounds in the wrong order is incorrect.

Return only:

```
{"verdict": "correct"}
```

or

```
{"verdict": "incorrect"}
```

#### LLM-as-Judge Prompt (AR items)

You are evaluating whether a model correctly abstained from answering an unanswerable conversational memory question.

The correct behavior is to indicate that the provided conversation does not contain enough evidence to determine one unique answer.

Evaluate the model response using the following rules:

1. A response is correct if it clearly states that the answer cannot be determined because the available conversational evidence is insufficient, missing, incomplete, or ambiguous.
2. The exact phrase "insufficient evidence" is not required. Semantically equivalent evidence-based abstentions are acceptable.
3. A generic statement such as "I don't know" is not sufficient unless it clearly attributes the uncertainty to missing or insufficient information in the provided conversation.
4. A safety, policy, capability, or willingness-based refusal does not count as a correct abstention.
5. A response is incorrect if it provides or commits to a specific answer.
6. A response is incorrect if it first states that the evidence is insufficient but then guesses or proposes a likely answer.
7. A response is incorrect if it presents several candidate answers instead of abstaining.
8. Do not judge whether the question itself is actually answerable. Assume the benchmark annotation is correct and evaluate only whether the model response exhibits the required evidence-based abstention behavior.

Return only:

```
{"verdict": "correct"}
```

or

```
{"verdict": "incorrect"}
```

## F.5 Error-Attribution Prompt

The auditor is never shown the error taxonomy. It reports where the committed answer came from, and the class is derived from its record by the fixed rules described in [Appendix E.2](#).

#### Error-Attribution Prompt

You are auditing one wrong answer given by a speech model to a question about a \ long spoken conversation history.

The conversation is given as sessions in time order. Each session is marked:

```
[EVIDENCE]    it carries information the question is about
[DISTRACTOR]  a similar session that does not carry the answer
[FILLER]      unrelated small talk, summarised to one line
```

User turns are verbatim transcripts of what was spoken. Three things about HOW \ a turn sounded are written into the transcript, because the model heard them \ and a reader cannot:

```
<|emotion:X|> <|prosody:X|> <|style:X|>  delivery of the text that follows
[background sound in this session: X]      what could be heard behind the speaker
Speaker 1 / Speaker 2 / ...                distinct voices, numbered by first
appearance
```



The response is already known to be wrong. Do NOT re-judge correctness. \

Determine only WHERE its answer came from.

Return one JSON object and nothing else:

```
{
  "commits": "specific" | "generic" | "off_type" | "none" | "truncated",
  "answer": "<what the response commits to, in a few words; null if nothing>",
  "evidence_recovered": true | false,
  "source": "evidence" | "other_session" | "absent" | "none",
  "source_session": <the session number the answer came from, or null>,
  "relation": "matches_gold" | "wrong_value_same_session" |
    "same_value_other_session"
    | "earlier_state" | "later_state" | "other_speaker" | "count_off" |
    "unrelated",
  "why": "<one sentence; quote the line the answer came from, if there is one>"
}
```

Field guidance:

- "commits":
  - "specific" it names a concrete answer of the kind the question asks for.
  - "generic" it only describes the answer in default terms that would fit any session -- for a delivery question, "clear", "neutral", "steady", "calm and composed"; for a sound question, "some background noise".
  - "off\_type" it answers a different question than the one asked: naming the topic of the conversation when asked what could be HEARD, or comparing what two threads are about when asked to compare their sounds.
  - "none" it commits to nothing -- including a bare acknowledgement ("I have noted that down"), and including a flat denial that anything was heard when an [EVIDENCE] session carries a cue.
  - "truncated" the text stops mid-sentence, or is visible reasoning that never reaches an answer ("Wait, look at the timestamps: ..."). Use this whenever no final answer was produced because the text ran out.
- "evidence\_recovered": did the response show it identified the answer-critical cue -- the right sound, the right delivery, the right speaker -- even if the final answer is wrong, incomplete or missing? This is separate from "commits": a response can name the right sound and still fail to give the count asked for.
- "source": "evidence" if the committed answer appears in a session marked [EVIDENCE]; "other\_session" if it appears in a [DISTRACTOR] or [FILLER] session; "absent" if it appears nowhere in the conversation -- including when the response invents an inventory of sounds or speakers that no session has; "none" if nothing was committed.
- "relation" is with respect to the REFERENCE ANSWER. Use "earlier\_state" or "later\_state" only when the committed answer is a real value of the same thing the question asks about, at a different point in time. Use "count\_off" when the answer is a number and the members counted are real.

Two worked examples:

Question asks which route was chosen in the session with water drops; reference "market route"; response "canal route"; Session 3 [DISTRACTOR] says "for the gallery stop, maybe we ought to choose the canal route", Session 66 [EVIDENCE] carries the water drops and says "market route".

```
-> {"commits":"specific","answer":"canal route","evidence_recovered":false,
    "source":"other_session","source_session":3,
    "relation":"same_value_other_session","why":"..."}
```

[...]