

ON-DEMAND ATTENTION: LANGUAGE MODELS KNOW WHEN TO RECALL

Haibo Feng^{1,3}, Ruiqi Liang², Dongyang Jin¹, Hanyang Peng³, Shiqi Yu¹

¹Southern University of Science and Technology

²Peking University

³Peng Cheng Laboratory

ABSTRACT

Reasoning and agentic workloads increasingly demand efficient long-context inference. Yet full-attention decoding reads the growing history at every step, although the benefit of global access varies across prediction positions. We find that, before global attention is computed for the current step, the decoding states available after local computation in frozen pretrained models already contain information predictive of its benefit over local attention. Building on this finding, we introduce On-Demand Attention (ODA), a local-first decoding method: after local computation, a lightweight recall head decides whether to recompute the current step with global attention. ODA trains only the recall head with modest data and compute budgets, leaving pretrained weights unchanged and retaining the complete historical KV cache so that information skipped at one step remains available for later access. Experiments across model scales and families, including hybrid attention backbones, show that ODA recovers most of the performance lost under local attention while substantially reducing the frequency of global attention. Controlled long-context measurements in vLLM further show that GPU-side conditional execution translates fewer global reads into practical decoding speedups over full attention. These findings show that pretrained decoding states can support both token prediction and decisions about accessing distant information, allowing models to allocate global computation as needed during decoding. Code will be available upon acceptance.

1 INTRODUCTION

Reasoning and agentic tasks often require large language models to generate extended outputs while processing a growing history, making efficient long-context decoding increasingly important (Massenkoff et al., 2026; Yang et al., 2026). Full-attention decoding accesses the complete history at every step, so history reads and attention computation become more costly as the context grows (Tang et al., 2024). However, the additional benefit of accessing distant information over using only the local context can vary across generation steps (Vakilian et al., 2026; Luo et al., 2025). Invoking global attention at every step does not account for this variation and incurs the cost of reading the complete history even when the additional benefit is limited. This raises a key question: before computing global attention for the current step, can we estimate the additional predictive benefit it would provide over local computation and use this estimate to decide whether to access the complete history?

We find that the decoding states available after local computation in pretrained models already contain signals predictive of the benefit of global attention over local attention (Figure 3(a)). This gives local computation a dual role: its output supports the current prediction and, together with other available states, helps determine whether additional global computation is worthwhile. One class of dynamic attention methods jointly trains the language model and its access policy to learn local-global allocation (Luo et al., 2025; Choudhary et al., 2026; Zhao et al., 2026; Pan et al., 2026); we instead keep pretrained weights unchanged and learn to read out this benefit signal from the model’s existing states to guide global access.

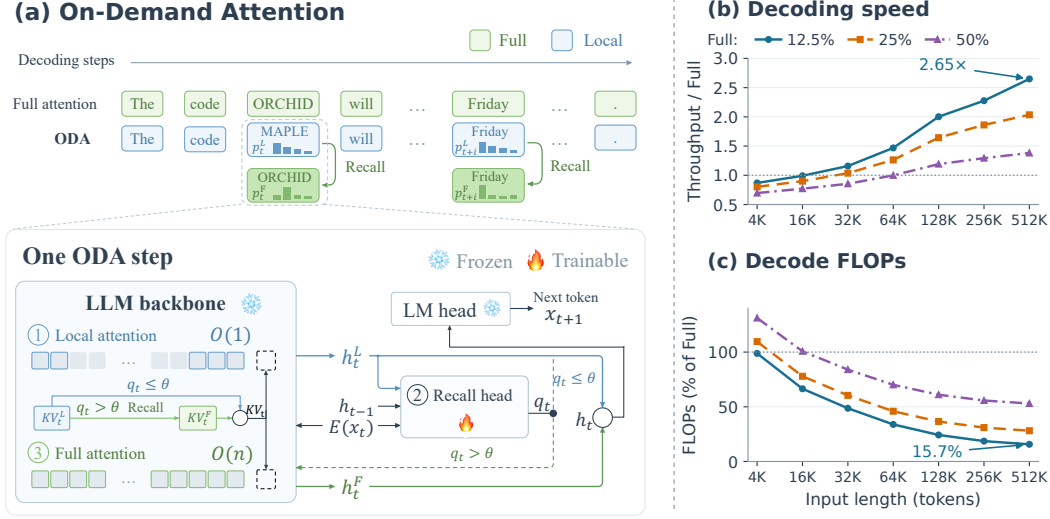


Figure 1: **ODA decoding and execution efficiency.** (a) After Local computation, the recall head accepts its result or triggers Full recomputation from the same pre-step history. Recall updates the current next-token distribution from p_t^L to p_t^F before token selection. (b) Warm single-request decode throughput relative to Full. (c) Major decode FLOPs as a percentage of Full. Panels (b,c) use Qwen3-1.7B with fixed continuations and prescribed Full-call rates; throughput excludes prefill. Further details appear in Appendix B.7.

Building on this finding, we introduce On-Demand Attention (ODA), a local-first decoding method that invokes global attention on demand. Each decoding step begins with local computation, after which a lightweight recall head uses the available decoding states to decide whether to accept the local result or recompute the step with global attention (Figure 1(a)). We train only the recall head with modest data and compute budgets, using the benefit of global attention over local attention under the same history as supervision and keeping pretrained weights unchanged. ODA also retains the complete historical KV cache, so information skipped at the current step remains available for later access.

ODA performs local computation and makes a recall decision at every step, so its net computational savings depend on whether the avoided global computation outweighs these costs. Our cost analysis shows that, with a fixed local window and global-attention call frequency, computational savings over full attention increase with context length. To translate these savings into practical decoding speedups, we build a vLLM (Kwon et al., 2023) runtime for on-demand global access that integrates local computation, recall decisions, and conditional global recomputation into GPU-side conditional CUDA Graphs and uses local KV workspace reuse and fused KV commits across layers to reduce synchronization, kernel-launch, and cache-maintenance overhead.

We evaluate ODA at two levels: benefit prediction under fixed histories and recall decisions during free generation. In fixed-history diagnostics on Qwen3-1.7B (Qwen Team, 2025), the recall head captures $2.81\times$ the expected net predictive gain of random selection under the same 40% offline access budget (Figure 3(a)). In free-generation evaluations on five RULER16K (Hsieh et al., 2024) tasks with this model, ODA achieves performance comparable to full attention at a global-attention call frequency of approximately 41% and outperforms random recall by 56.2 points at similar call frequencies (Figure 3(b)). These results show that ODA’s quality recovery depends on both the frequency of global-attention calls and how those calls are allocated. Results on RULER at 4K–64K context lengths and evaluations on LongBench (Bai et al., 2024) further support this trade-off between quality and access frequency and demonstrate ODA’s applicability across model scales and architectures, including Qwen3, Qwen3.5 (Qwen Team, 2026), and Gemma (Gemma Team, 2026) (Tables 1 and 2). In independent controlled vLLM measurements on Qwen3-1.7B with 512K input tokens and a prescribed 12.5% global-attention call frequency, ODA achieves $2.65\times$ the single-request decoding throughput of native full attention after warm-up (Figure 1(b)).

Our contributions are threefold:

- **Predicting global-attention benefit from pretrained states.** We find that the decoding states available after local computation in frozen pretrained models contain signals predictive of the benefit of global attention over local attention, providing empirical support for using existing model representations to guide information access.
- **Local-first On-Demand Attention.** We introduce ODA and train only a lightweight recall head to decide when to recompute with global attention, allocating global computation according to decoding needs while keeping pretrained weights unchanged and preserving access to the complete history.
- **Efficient conditional execution.** We build a vLLM runtime that combines GPU-side conditional execution with efficient KV-state maintenance and validate the long-context decoding speedups enabled by on-demand access through independent controlled measurements.

2 ON-DEMAND ATTENTION

On-Demand Attention (ODA) gives each Local computation two roles: producing a candidate state for the current prediction and providing information for deciding whether global computation is needed. A recall head reads states available after Local and chooses either to accept the candidate or to recompute the current step with Full from the same pre-step history (Figure 1(a), lower diagram). ODA trains only the recall head, keeps pretrained parameters frozen, and retains the complete history so that positions skipped at one step remain accessible at later steps.

2.1 LOCAL-FIRST DECODING

At decoding position t , the model processes the known input token x_t to predict the next token x_{t+1} . Let C_{t-1} denote the state committed before this step, including historical KV and any other state required by the model. Local and Full are two access modes of the same frozen backbone F_ϕ . Full uses the model’s native configuration. Local restricts layers that natively attend to the full history to s initial positions and a recent window of width w . For these layers, the access sets are

$$\begin{aligned}\mathcal{S}_t^F &= \{1, \dots, t\}, \\ \mathcal{S}_t^L &= \{1, \dots, \min(s, t)\} \cup \{\max(1, t - w + 1), \dots, t\}.\end{aligned}\tag{1}$$

The recent window includes the current token. This initial-token-plus-window pattern follows StreamingLLM (Xiao et al., 2024). For hybrid backbones, Local restricts only the full-history attention layers; recurrent layers retain their native computation.

Each step first executes Local and then computes a recall score:

$$\begin{aligned}(h_t^L, \Delta C_t^L) &= F_\phi^L(x_t; C_{t-1}), \\ q_t &= R_\psi(h_{t-1}, E_\phi(x_t), h_t^L).\end{aligned}\tag{2}$$

Here h_t^L is the final normalized Local hidden state and ΔC_t^L is its candidate state update. The head also receives the preceding step’s selected hidden state h_{t-1} and the embedding $E_\phi(x_t)$ of the known input token. All head inputs are available before the current Full computation and require no reference next token. The head architecture is detailed in Appendix A.2.

If $q_t > \theta$, ODA recomputes the current step with Full from the same C_{t-1} while the Local update remains uncommitted; otherwise, it accepts Local. The default threshold is $\theta = 0$.

Only the selected hidden state h_t passes through the frozen vocabulary projection W_{LM} to produce the next-token distribution and becomes the preceding-state input to the next recall decision. The corresponding current-position KV and other state updates are committed to C_t . For hybrid backbones, a Full retry also restores the same pre-step recurrent state.

Algorithm 1 gives the complete online step. Decoding starts from Full prefill, which supplies the initial history, preceding hidden state, and first generated token (Appendix A.3).

Algorithm 1 One decoding step of On-Demand Attention

Require: Known input x_t , committed history C_{t-1} , selected state h_{t-1} , threshold θ

```
1:  $(h_t^L, \Delta C_t^L) \leftarrow F_\phi^L(x_t; C_{t-1})$ 
2:  $q_t \leftarrow R_\psi(h_{t-1}, E_\phi(x_t), h_t^L)$ 
3: if  $q_t > \theta$  or  $q_t$  is nonfinite then
4:    $(h_t, \Delta C_t) \leftarrow F_\phi^F(x_t; C_{t-1})$ 
5: else
6:    $(h_t, \Delta C_t) \leftarrow (h_t^L, \Delta C_t^L)$ 
7: end if
8:  $C_t \leftarrow \text{COMMIT}(C_{t-1}, \Delta C_t)$ 
9:  $p_t \leftarrow \text{softmax}(W_{\text{LM}} h_t)$ 
10:  $x_{t+1} \leftarrow \text{DECODE}(p_t)$ 
11: return  $x_{t+1}, C_t, h_t$ 
```

2.2 LEARNING TO PREDICT RECALL BENEFIT

The recall decision asks how much an additional Full computation would improve the current prediction. We measure this benefit by comparing the two branches at the same history and on the same reference next token x_{t+1} . For branch $b \in \{L, F\}$, let p_t^b be its next-token distribution and $\ell_t^b = -\log p_t^b(x_{t+1})$ its negative log-likelihood (NLL). The access gain is

$$g_t = \ell_t^L - \ell_t^F = \log p_t^F(x_{t+1}) - \log p_t^L(x_{t+1}). \quad (3)$$

Positive gain means that Full increases the reference token’s probability; negative gain favors Local. Even when both branches have the same top-ranked token, their assigned probabilities can differ. Access gain therefore captures changes that prediction agreement alone misses, as illustrated by the schematic Friday example in Figure 1(a).

Let $a_t \in \{0, 1\}$ denote the access action, with $a_t = 0$ accepting Local and $a_t = 1$ invoking Full. Assign the Full call a penalty $\lambda \geq 0$ on the prediction-loss scale. At a fixed history and reference token, the penalized one-step loss is

$$\begin{aligned} \ell_t(a_t) &= (1 - a_t)\ell_t^L + a_t(\ell_t^F + \lambda) \\ &= \ell_t^L - a_t(g_t - \lambda). \end{aligned} \quad (4)$$

Invoking Full lowers this loss when its predictive improvement exceeds the assigned penalty. Relative to the better action, an incorrect choice incurs an excess loss of $|g_t - \lambda|$ (Appendix A.1). Two incorrect decisions can therefore have very different consequences. Retaining gain magnitude in the supervision distinguishes marginal improvements from high-value accesses, a distinction that a binary benefit label alone does not express. This comparison concerns one-step prediction at a fixed history.

To construct paired supervision, we first run the frozen Full backbone on reference sequences to form the history, then compute Local and Full candidates from the same pre-step reference history at each position. These candidates leave the history read by later training positions unchanged. Training hidden states are selected using reference gains and shifted by one position within each sequence to form the head’s preceding-state input. During deployment, both the history and the preceding hidden state follow the head’s actual branch selections. Training thus uses paired supervision on reference histories, while decoding follows the history formed by its own decisions. The full construction is given in Appendix A.3 and Algorithm 2.

We regress the gain after subtracting the call penalty, $d_t = g_t - \lambda$. A signed-log transform compresses large target values while preserving their sign and ordering:

$$y_t = T(d_t), \quad T(u) = \text{sign}(u) \log(1 + |u|). \quad (5)$$

The head learns this target with Huber regression (Huber, 1964), using a transition point of one:

$$\mathcal{L}(\psi) = \frac{1}{|\mathcal{E}|} \sum_{t \in \mathcal{E}} \ell_{\text{Huber},1}(q_t - y_t). \quad (6)$$

Here $\mathcal{E}$ contains eligible positions in a training batch, each with a valid reference next token and different Local and Full access sets. Training updates only the recall-head parameters ψ ; the backbone, embedding, and vocabulary projection remain frozen. Sequence-boundary handling and loss reduction across batches and devices are detailed in Appendices A.3 and A.4.

The head learns a regression score q_t from transformed gains for online branch selection. The penalty λ controls the access preference during training, while θ sets the decision threshold during deployment.

2.3 COMPUTATIONAL COST AND EFFICIENT EXECUTION

Computational savings. Let F_{Local} and $F_{\text{Full}}(n)$ denote the two branches’ backbone FLOPs at history length n , excluding the vocabulary projection, and let F_{Recall} denote the recall-head FLOPs. At a Full-call rate ρ , ODA’s average per-step savings relative to Full are

$$\Delta F(n, \rho) = (1 - \rho)F_{\text{Full}}(n) - F_{\text{Local}} - F_{\text{Recall}}. \quad (7)$$

Net savings depend on whether the skipped Full computation covers the Local and recall costs paid at every step, including recalled steps. Both methods project the final selected hidden state to the vocabulary once, so this common cost cancels in the difference. With a fixed Local range and call rate $\rho < 1$, these savings increase with context length.

Efficient execution. To translate these computation savings into faster decoding, our Qwen3 runtime in vLLM (Kwon et al., 2023) provides an execution path for Local attempts and conditional Full recomputation. Full retains native FlashAttention and the paged KV cache. Local uses a dedicated window-restricted attention path with a persistent ring KV workspace to bound KV reads and avoid repeated window materialization. GPU-side conditional CUDA Graphs integrate Local, recall-head scoring, conditional Full, and selected-state commitment, so branch selection proceeds without copying each score to the CPU for scheduling. Fused cache updates across layers and graph reuse within compatible length intervals further reduce small-kernel launch and graph management overhead. These optimizations preserve the recall head’s actual computation, absolute token positions for Local access, and selected-history commitment semantics. Cache layout, graph reuse, and the complete latency model are detailed in Appendices A.5 and A.6.

3 EXPERIMENTS

We evaluate ODA’s quality–access trade-off across models, tasks, and context lengths. Benefit diagnostics, free-generation controls, and runtime measurements examine the role of access selection and its execution benefits.

3.1 EXPERIMENTAL SETUP

Tasks and models. We evaluate on RULER and LongBench v1 (Hsieh et al., 2024; Bai et al., 2024). RULER tests controlled long-context capabilities, including retrieval, tracing, and aggregation, at 4K, 8K, 16K, 32K, and 64K tokens. Our LongBench evaluation comprises ten tasks spanning single-document QA, multi-document QA, summarization, and passage retrieval; throughout this paper, LongBench refers to this task set. Qwen3-1.7B is our primary model. We additionally evaluate Qwen3-8B (Qwen Team, 2025), Qwen3.5-2B, Qwen3.5-27B (Qwen Team, 2026), and Gemma-4-12B-it (Gemma Team, 2026) to examine applicability across model scales, families, and native architectures.

Compared policies and shared settings. We compare ODA, each model’s native attention configuration (Full), and a fixed local-access policy using the StreamingLLM pattern (Xiao et al., 2024). StreamingLLM and ODA’s Local branch share the same access range: the first four positions and the most recent 2,048 positions, including the current token. ODA’s recall head decides whether to perform additional Full computation. In hybrid architectures, the local restriction applies only to native global attention layers; all other layers retain their native computation. All generation evaluations use Full prefill, after which each policy generates its own continuation and maintains its own history. We train a separate recall head for each model while keeping the pretrained backbone frozen.

Metrics and evaluation protocol. We use each task’s official quality metric and report task-macro scores and actual Full-call rates during decoding. Table captions specify aggregation across tasks and context lengths. Training configurations, checkpoints, thresholds, decoding settings, and metric

Table 1: **RULER generation quality by context length.** The percentage below each ODA score is its realized Full-call rate, pooled over routed decoding positions at that length. Avg takes the unweighted mean over the five lengths for scores and call rates separately.

Model	Method	4k	8k	16k	32k	64k	Avg
Qwen3-1.7B	Full-attn	90.63	87.10	81.94	75.63	64.61	79.98
	StreamingLLM	61.29	33.51	19.23	12.90	9.11	27.21
	ODA	90.12	86.57	81.17	74.68	63.90	79.29
Qwen3-8B	Full-attn	95.19	94.45	92.98	91.52	83.11	91.45
	StreamingLLM	67.23	40.37	25.45	17.08	14.22	32.87
	ODA	95.02	93.79	92.05	90.63	82.13	90.72
Qwen3.5-2B	Full-attn	94.54	94.62	94.31	93.99	93.10	94.11
	StreamingLLM	67.59	40.83	28.27	19.88	13.64	34.04
	ODA	93.82	93.91	94.07	93.58	92.24	93.52
Qwen3.5-27B	Full-attn	97.69	92.09	95.91	97.36	97.21	96.05
	StreamingLLM	66.42	45.56	31.36	25.60	20.97	37.98
	ODA	95.98	90.15	95.79	96.23	96.36	94.90
Gemma-4-12B-it	Full-attn	97.41	97.19	96.61	96.34	94.86	96.48
	StreamingLLM	67.18	41.00	30.07	22.38	17.61	35.65
	ODA	97.20	96.72	96.12	95.67	94.02	95.95

Table 2: **LongBench v1 generation quality on ten tasks.** Avg is the unweighted mean of task scores; parentheses report the mean Full-call rate over the same tasks.

Model	Method	Single-doc QA			Multi-doc QA				Summarization		Synthetic retrieval	Avg
		Qasper	MF-En	MF-Zh	2Wiki	Hotpot	MuSiQue	DuReader	QMSum	VCSum	PRet-Zh	
Qwen3 1.7B	Full-attn	37.34	46.78	55.29	34.62	39.60	16.06	32.42	22.76	15.15	95.00	39.50
	StreamingLLM	31.69	30.42	39.39	29.46	31.10	8.36	17.75	20.92	13.52	48.00	27.06
	ODA	36.84	45.67	54.99	34.59	40.00	16.28	31.61	22.47	14.87	94.67	39.20 (80.12%)
Qwen3 8B	Full-attn	46.08	54.13	62.55	40.79	56.76	32.08	26.78	24.19	13.94	97.50	45.48
	StreamingLLM	37.59	37.30	45.74	33.55	45.91	21.67	17.68	21.53	14.20	49.50	32.47
	ODA	45.96	53.83	62.55	40.78	56.77	31.89	26.62	24.03	14.05	97.50	45.40 (88.35%)
Qwen3.5 2B	Full-attn	39.63	52.06	61.61	34.63	48.15	31.92	27.97	22.07	13.13	84.50	41.57
	StreamingLLM	32.56	34.55	44.04	29.98	36.21	17.64	16.17	19.95	11.87	50.50	29.35
	ODA	39.21	51.75	61.72	34.63	48.14	32.29	28.65	21.87	12.73	84.50	41.55 (82.23%)
Qwen3.5 27B	Full-attn	47.63	55.24	64.73	66.79	67.58	55.71	24.07	22.23	13.11	100.00	51.71
	StreamingLLM	41.36	40.28	53.37	64.01	58.73	47.17	16.27	19.72	12.45	98.00	45.14
	ODA	47.18	55.02	64.89	66.70	67.65	55.75	23.29	22.13	12.94	100.00	51.55 (53.07%)
Gemma-4 12B-it	Full-attn	48.06	58.14	66.62	65.50	63.70	46.59	27.18	24.22	14.72	100.00	51.47
	StreamingLLM	41.81	42.83	51.71	60.68	54.02	33.47	16.68	20.85	13.45	98.50	43.40
	ODA	48.23	56.63	65.61	65.68	63.74	46.01	25.87	24.14	14.26	99.50	50.97 (58.65%)

definitions appear in Appendix B.1; experiment-specific conditions are given in the corresponding sections.

3.2 GENERATION QUALITY UNDER SELECTIVE GLOBAL ACCESS

Context length. ODA preserves generation quality close to Full across 4K–64K (Table 1). As RULER retrieval inputs grow, targets are more likely to lie outside the fixed local window, increasing the need to retrieve distant evidence. When the input doubles from 32K to 64K, the Full-call rate increases by only 0.24–4.18 percentage points across the five models, with all score gaps to Full below one point at 64K, while Local continues to degrade. This change is consistent with increased demand for remote access: ODA compensates for local restrictions through a modest increase in global calls, while retaining many generation steps completed by Local.

Task objectives. On LongBench, ODA’s average score is within approximately 0.5 points of Full for all five models (Table 2). Generation trajectories further illustrate the relationship between task

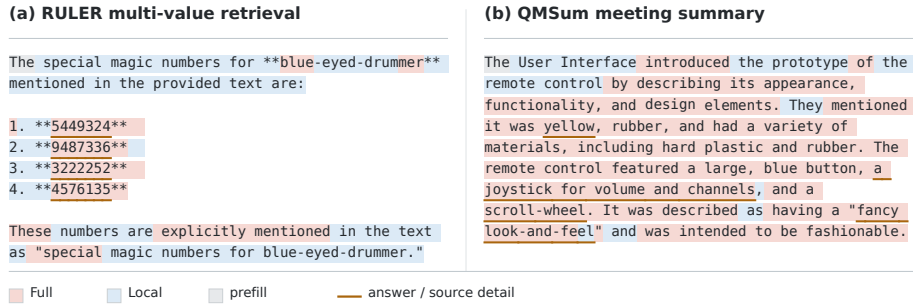


Figure 2: **Token-level access allocation across tasks.** Routing trajectories from the same Qwen3-1.7B recall head on (a) RULER multi-value retrieval and (b) an excerpt from a QMSum meeting summary.

objectives and access allocation (Figure 2). In RULER multi-value retrieval, Full calls concentrate on the target numbers, while Local handles much of the introductory text and list formatting. In QMSum, Full calls more continuously cover descriptions of source details. These examples organize their outputs around discrete answers and continuous content integration, respectively, with corresponding differences in the positions and density of global access. Additional RULER and MultiNews examples appear in Appendix B.2.

Model architecture and scale. ODA complements models’ native history-processing mechanisms, reducing global calls in full-attention, linear-global hybrid, and window-global hybrid architectures. On RULER, Qwen3.5 uses fewer Full calls than Qwen3 and Gemma. We hypothesize that Qwen3.5’s recurrent states, which continually aggregate history, may reduce the need for explicit global reads, whereas Gemma’s windowed computation may depend more on global layers to supply distant information. Scaling within a family also suggests potential for further access savings: increasing Qwen3 from 1.7B to 8B and Qwen3.5 from 2B to 27B reduces the average Full-call rate by 6.68 and 10.44 percentage points, respectively, while each model’s average score remains within 1.2 points of its own Full baseline. The larger Qwen3.5 model similarly preserves near-Full quality with fewer calls on LongBench. These results suggest that architectural pathways for historical information and greater representational capacity may offer further opportunities to improve ODA’s quality-access trade-off.

3.3 EFFECTIVENESS OF STATE-DEPENDENT ACCESS

Access selection. Figure 3 compares state-dependent access with random calls through predictive benefit and free generation. On Qwen3-1.7B’s fixed reference records, all rankings use the same histories and selection budgets. At a 40% budget, the recall head captures 0.150 nats of net gain per reference position, $2.81\times$ the expected gain of random selection and above Local entropy’s 0.065. The difference is more pronounced in free generation: on five RULER16K tasks, ODA scores 88.96 at approximately 41% Full calls, comparable to Full, whereas Random scores only 32.79 at a similar call rate. These comparisons show that using model states to select access positions both captures more predictive benefit within a fixed budget and yields better generation quality at a similar proportion of global calls.

Benefit concentration. The learned-policy curves show large early gains followed by smaller increments. In Figure 3(a), the highest-scoring approximately 10% of positions already capture 0.144 nats of net gain per reference position; expanding the budget to 40% increases this to only 0.150. In Figure 3(b), ODA already scores 85.17 at 24.8% Full calls, reaches 88.88 at 36.1%, and stays around 89 across the remaining measured configurations up to 58.3%. In comparison, random selection’s expected benefit grows linearly with its budget, while random calling yields only gradual gains in generation score. These patterns indicate that access value varies across positions: the learned policy prioritizes beneficial accesses and recovers much of the quality at relatively low call rates, with

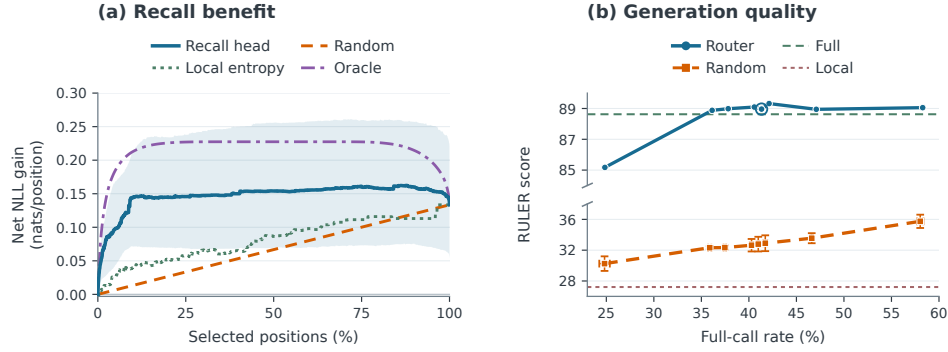


Figure 3: **Global-access benefit and generation quality (Qwen3-1.7B).** (a) Selected signed NLL gains, normalized by all reference positions. (b) Quality versus Full-call rate, averaged over five RULER16K tasks. Shading: 95% sequence-bootstrap intervals; Random error bars: standard deviations across three seeds. The ring marks $\theta = 0$.

Table 3: **Effect of recall-head inputs on quality and Full-call rate.** Qwen3-1.7B heads share the same architecture and are evaluated on RULER16K at $\theta = 0$. H , E , and L denote the preceding selected hidden state, current token embedding, and current Local state, respectively.

H	E	L	RULER16K	Full (%)
✓	—	—	76.84	83.20
—	✓	—	49.88	87.32
—	—	✓	81.60	89.25
✓	✓	—	81.94	99.73
✓	—	✓	67.96	21.86
—	✓	✓	81.53	97.51
✓	✓	✓	81.57	76.22

smaller increments from additional calls over these measured ranges. This leaves room to retain valuable accesses while assigning more generation steps to Local.

State inputs. The current Local computation provides evidence for the recall decision. Under shared training settings and a zero decision threshold (Table 3), using only the preceding selected hidden state H and current token embedding E yields 81.94, but invokes Full on 99.73% of steps. Adding the current Local state L maintains a score of 81.57 while reducing the Full-call rate to 76.22%. Using L alone yields a similar 81.60 but requires 89.25% Full calls. The combined inputs provide the preceding context representation, current token information, and current Local result, supporting the head in accepting more Local outputs while preserving similar quality. This agrees with ODA’s local-first design: first form the current prediction state through local computation, then decide whether additional global information is needed.

These results indicate further potential for state-dependent access allocation. Global access provides unequal benefits across generation positions, and prioritizing high-value accesses allows fewer calls to recover much of the generation quality. Under fixed histories, the offline Oracle still captures more benefit than the current recall head, suggesting room to improve this trade-off through more accurate selection. As context length grows, each avoided global access also saves more computation (Section 2.3). Better identification of access benefit may therefore further reduce expensive global computation while preserving long-context generation quality.

3.4 COMPUTATION AND DECODING EFFICIENCY

Using the vLLM runtime in Section 2.3, we evaluate Qwen3-1.7B’s computational savings and decode throughput across context lengths and Full-call rates. At each length, all methods share the input and a fixed continuation, with Full calls controlled by prescribed schedules. The recall head

executes at every ODA step, and timing covers the complete decoding path, including conditional recomputation and state maintenance.

Figure 1(c) shows major decoding FLOPs as a percentage of Full at each context length. For the 512K input and 12.5% Full calls, ODA uses 15.69% of Full’s FLOPs, an 84.31% reduction and a $6.38\times$ computation ratio. The relative cost decreases with context length, while larger recall budgets leave more repeated computation.

Figure 1(b) reports the resulting decode throughput. Measurements use batch size one and CUDA Graphs for both ODA and native Full, with matched hardware configurations within each length. At the same 512K/12.5% operating point, median throughput rises from 77.64 to 205.71 tokens/s ($2.65\times$). At 4K, however, ODA remains 13.1% slower at the same call rate: avoiding short global reads does not offset the Local and conditional-execution overhead. Thus, the speed benefit depends on both context length and recall frequency.

Further experimental details are provided in Appendix B.7.

4 RELATED WORK

Dynamic local–global attention. AHA learns per-token choices between global and sliding-window attention for each head (Luo et al., 2025), while Switch Attention learns token- and layer-dependent routing through continued pretraining (Zhao et al., 2026). L2A uses local outputs to gate a global branch within each layer (Choudhary et al., 2026), and LoGo couples local and global branches with a controller for the global-attention budget (Pan et al., 2026). ODA makes a single recall decision after a complete Local forward pass and trains only the recall head, keeping the pretrained backbone frozen.

Sparse access and KV management. H₂O evicts KV entries (Zhang et al., 2023), while QUEST selects pages from retained KV using the current query (Tang et al., 2024). SeerAttention-R learns block selection through attention distillation with frozen pretrained weights (Gao et al., 2025). RefreshKV alternates full-context and subset attention, updating a small cache using attention from each global step (Xu et al., 2025). Like RefreshKV, ODA preserves subsequent access to the complete history; it learns when to extend a fixed Local read to Full rather than which remote KV subset to read.

Model-guided information acquisition. FLARE uses low-confidence tokens in a draft sentence to trigger retrieval and regeneration (Jiang et al., 2023), while Probing-RAG reads hidden states to decide whether further document retrieval is needed (Baek et al., 2025). Declarative Attention uses model-generated `<global>`, `<focus>`, and `<local>` declarations to control subsequent attention without additional training (Ho et al., 2026). LongPPL uses long–short context prediction differences to identify key tokens for evaluation and training reweighting (Fang et al., 2025). ODA uses paired Full–Local prediction gains under a shared history to supervise a state readout that decides whether to recompute the current step with Full.

5 DISCUSSION AND CONCLUSION

Discussion. ODA retains the complete history for later recall, while KV storage grows with sequence length. Access decisions shape subsequent states, so later Full computation uses the policy’s actual history rather than reconstructing an Always-Full trajectory. The head learns one-step gains on reference histories constructed with Full, whereas deployment histories evolve with its own decisions. Future work could learn recall on policy-generated histories and account for downstream generation quality and cumulative computational cost.

Conclusion. We find that states available after local computation in frozen models contain signals predictive of the benefit of additional global attention. ODA reads out these signals with a lightweight recall head, recovering most of the generation quality lost under local attention with fewer global calls while retaining the complete history. Our vLLM runtime with GPU-side conditional execution delivers decoding speedups in independent controlled long-context measurements.

These findings show that pretrained decoding states can support both token prediction and the on-demand allocation of global computation.

AI USE STATEMENT

Generative AI assistance (OpenAI Codex) was used to support manuscript writing, translation, and language editing. This included suggesting word choices and alternative phrasing, improving grammar and sentence structure, and refining wording for clarity, conciseness, and consistency. The authors take responsibility for the final content of the manuscript.

REPRODUCIBILITY STATEMENT

Algorithms 1 and 2 specify the decoding procedure and training update. Appendix A details the supervision, state handling, and computational cost assumptions. Appendix B.1 describes the training and evaluation settings, and Appendix B.8 provides the primary training configuration and resource measurements. Appendix B reports per-task results and diagnostic protocols, including the controlled runtime measurements in Appendix B.7. The anonymous supplementary package provides implementation code, experiment configurations, numerical records, and scripts for checking aggregates and regenerating plots. Its README documents dependencies, data organization, and execution commands.

REFERENCES

- Ingeol Baek, Hwan Chang, ByeongJeong Kim, Jimin Lee, and Hwanhee Lee. Probing-RAG: Self-probing to guide language models in selective document retrieval. In *Findings of the Association for Computational Linguistics: NAACL 2025*, pp. 3287–3304. Association for Computational Linguistics, 2025. doi: 10.18653/v1/2025.findings-naacl.181. URL <https://aclanthology.org/2025.findings-naacl.181/>.
- Yushi Bai, Xin Lv, Jiajie Zhang, Hongchang Lyu, Jiankai Tang, Zhidian Huang, Zhengxiao Du, Xiao Liu, Aohan Zeng, Lei Hou, Yuxiao Dong, Jie Tang, and Juanzi Li. LongBench: A bilingual, multitask benchmark for long context understanding. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 3119–3137. Association for Computational Linguistics, 2024. doi: 10.18653/v1/2024.acl-long.172. URL <https://aclanthology.org/2024.acl-long.172/>.
- Yushi Bai, Shangqing Tu, Jiajie Zhang, Hao Peng, Xiaozhi Wang, Xin Lv, Shulin Cao, Jiazheng Xu, Lei Hou, Yuxiao Dong, Jie Tang, and Juanzi Li. LongBench v2: Towards deeper understanding and reasoning on realistic long-context multitasks. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 3639–3664. Association for Computational Linguistics, 2025. doi: 10.18653/v1/2025.acl-long.183. URL <https://aclanthology.org/2025.acl-long.183/>.
- Sakshi Choudhary, Aditya Chattopadhyay, Luca Zancato, Elvis Nunez, Matthew Trager, Wei Xia, and Stefano Soatto. Learning when to attend: Conditional memory access for long-context LLMs. *arXiv preprint arXiv:2603.17484*, 2026. URL <https://arxiv.org/abs/2603.17484>.
- Lizhe Fang, Yifei Wang, Zhaoyang Liu, Chenheng Zhang, Stefanie Jegelka, Jinyang Gao, Bolin Ding, and Yisen Wang. What is wrong with perplexity for long-context language modeling? In *International Conference on Learning Representations*, pp. 94541–94563, 2025. URL https://proceedings.iclr.cc/paper_files/paper/2025/hash/ebd6641c32ed633c2a3addc689d39896-Abstract-Conference.html.
- Yizhao Gao, Shuming Guo, Shijie Cao, Yuqing Xia, Yu Cheng, Lei Wang, Lingxiao Ma, Yutao Sun, Tianzhu Ye, Li Dong, Hayden Kwok-Hay So, Yu Hua, Ting Cao, Fan Yang, and Mao Yang. SeerAttention-R: Sparse attention adaptation for long reasoning. *arXiv preprint arXiv:2506.08889*, 2025. URL <https://arxiv.org/abs/2506.08889>.
- Gemma Team. Gemma 4 technical report. *arXiv preprint arXiv:2607.02770*, 2026. URL <https://arxiv.org/abs/2607.02770>.

- Namgyu Ho, Huzama Ahmad, Woosung Koh, Se-Young Yun, Tal Schuster, and Cicero Nogueira dos Santos. Language models can control their own attention. *arXiv preprint arXiv:2609.02737*, 2026. URL <https://arxiv.org/abs/2609.02737>.
- Cheng-Ping Hsieh, Simeng Sun, Samuel Krizan, Shantanu Acharya, Dima Rekesch, Fei Jia, Yang Zhang, and Boris Ginsburg. RULER: What’s the real context size of your long-context language models? In *First Conference on Language Modeling*, 2024. URL <https://arxiv.org/abs/2404.06654>.
- Peter J. Huber. Robust estimation of a location parameter. *The Annals of Mathematical Statistics*, 35(1):73–101, 1964. doi: 10.1214/aoms/1177703732. URL <https://doi.org/10.1214/aoms/1177703732>.
- Zhengbao Jiang, Frank Xu, Luyu Gao, Zhiqing Sun, Qian Liu, Jane Dwivedi-Yu, Yiming Yang, Jamie Callan, and Graham Neubig. Active retrieval augmented generation. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pp. 7969–7992. Association for Computational Linguistics, 2023. doi: 10.18653/v1/2023.emnlp-main.495. URL <https://aclanthology.org/2023.emnlp-main.495/>.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. Efficient memory management for large language model serving with PagedAttention. In *Proceedings of the 29th Symposium on Operating Systems Principles*, pp. 611–626. Association for Computing Machinery, 2023. doi: 10.1145/3600006.3613165. URL <https://arxiv.org/abs/2309.06180>.
- Jiaqi Li, Mengmeng Wang, Zilong Zheng, and Muhan Zhang. LooGLE: Can long-context language models understand long contexts? In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 16304–16333. Association for Computational Linguistics, 2024. doi: 10.18653/v1/2024.acl-long.859. URL <https://aclanthology.org/2024.acl-long.859/>.
- Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In *International Conference on Learning Representations*, 2019. URL <https://arxiv.org/abs/1711.05101>.
- Xuan Luo, Kailai Zhang, and Xifeng Yan. Learning when not to attend globally. *arXiv preprint arXiv:2512.22562*, 2025. URL <https://arxiv.org/abs/2512.22562>.
- Maxim Massenkoff, Eva Lyubich, Szymon Sacher, Zoe Hitzig, Shaoyi Zhang, Ryan Heller, and Peter McCrory. Anthropic Economic Index report: Cadences. Anthropic research report, June 2026. URL <https://www.anthropic.com/research/economic-index-june-2026-report>. June 26, 2026.
- Yuqi Pan, Zheng Li, Bohao Tang, Zhen Qin, and Guoqi Li. LoGo: Token-level dynamic local-global attention. *arXiv preprint arXiv:2608.29539*, 2026. URL <https://arxiv.org/abs/2608.29539>.
- Bowen Peng, Jeffrey Quesnelle, Honglu Fan, and Enrico Shippole. YaRN: Efficient context window extension of large language models. In *International Conference on Learning Representations*, 2024. URL <https://arxiv.org/abs/2309.00071>.
- Qwen Team. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025. URL <https://arxiv.org/abs/2505.09388>.
- Qwen Team. Qwen3.5: Towards native multimodal agents. Qwen blog, February 2026. URL <https://qwen.ai/blog?id=qwen3.5>.
- Uri Shaham, Maor Ivgi, Avia Efrat, Jonathan Berant, and Omer Levy. ZeroSCROLLS: A zero-shot benchmark for long text understanding. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pp. 7977–7989. Association for Computational Linguistics, 2023. doi: 10.18653/v1/2023.findings-emnlp.536. URL <https://aclanthology.org/2023.findings-emnlp.536/>.
- Noam Shazeer. GLU variants improve transformer. *arXiv preprint arXiv:2002.05202*, 2020. URL <https://arxiv.org/abs/2002.05202>.

- StepFun. Step-3.5-Flash-SFT. Hugging Face dataset, 2026. URL <https://huggingface.co/datasets/stepfun-ai/Step-3.5-Flash-SFT>.
- Jiaming Tang, Yilong Zhao, Kan Zhu, Guangxuan Xiao, Baris Kasikci, and Song Han. QUEST: Query-aware sparsity for efficient long-context LLM inference. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pp. 47901–47911. PMLR, 2024. URL <https://proceedings.mlr.press/v235/tang241.html>.
- Vala Vakilian, Zimeng Wang, Ankit Singh Rawat, and Christos Thrampoulidis. Short-context dominance: How much local context natural language actually needs? *arXiv preprint arXiv:2512.08082*, 2026. URL <https://arxiv.org/abs/2512.08082>.
- Guangxuan Xiao, Yuandong Tian, Beidi Chen, Song Han, and Mike Lewis. Efficient streaming language models with attention sinks. In *International Conference on Learning Representations*, pp. 21875–21895, 2024. URL https://proceedings.iclr.cc/paper_files/paper/2024/hash/5e5fd18f863cbe6d8ae392a93fd271c9-Abstract-Conference.html.
- Fangyuan Xu, Tanya Goyal, and Eunsol Choi. RefreshKV: Updating small KV cache during long-form generation. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 24878–24893. Association for Computational Linguistics, 2025. doi: 10.18653/v1/2025.acl-long.1211. URL <https://aclanthology.org/2025.acl-long.1211/>.
- Penghui Yang, Cunxiao Du, Fengzhuo Zhang, Haonan Wang, Tianyu Pang, Chao Du, and Bo An. LongSpec: Long-context lossless speculative decoding with efficient drafting and verification. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 1826–1844. Association for Computational Linguistics, 2026. doi: 10.18653/v1/2026.acl-long.83. URL <https://aclanthology.org/2026.acl-long.83/>.
- Biao Zhang and Rico Sennrich. Root mean square layer normalization. In *Advances in Neural Information Processing Systems*, volume 32, 2019. URL <https://arxiv.org/abs/1910.07467>.
- Zhenyu Zhang, Ying Sheng, Tianyi Zhou, Tianlong Chen, Lianmin Zheng, Ruisi Cai, Zhao Song, Yuandong Tian, Christopher Ré, Clark Barrett, Zhangyang Wang, and Beidi Chen. H₂O: Heavy-hitter oracle for efficient generative inference of large language models. In *Advances in Neural Information Processing Systems*, volume 36, 2023. URL https://proceedings.neurips.cc/paper_files/paper/2023/hash/6ceefa7b15572587b78ecfceb2827f8-Abstract-Conference.html.
- Yusheng Zhao, Hourun Li, Bohan Wu, Yichun Yin, Lifeng Shang, Jingyang Yuan, Meng Zhang, and Ming Zhang. Switch attention: Towards dynamic and fine-grained hybrid transformers. *arXiv preprint arXiv:2603.26380*, 2026. URL <https://arxiv.org/abs/2603.26380>.

A ADDITIONAL METHOD DETAILS

A.1 ACCESS GAIN AND THE COST OF ROUTING ERRORS

At a fixed history and reference token, write $\ell_t^b = -\log p_t^b(x_{t+1})$ for $b \in \{L, F\}$ and $g_t = \ell_t^L - \ell_t^F$. Let $a_t \in \{0, 1\}$ indicate whether Full is selected. The excess loss relative to the better current branch is

$$(1 - a_t)\ell_t^L + a_t\ell_t^F - \min(\ell_t^L, \ell_t^F) = (1 - a_t)[g_t]_+ + a_t[-g_t]_+, \quad (8)$$

where $[u]_+ = \max(u, 0)$. Selecting the worse branch costs $|g_t|$, so routing-error counts alone do not measure the resulting NLL penalty. With the Full-call penalty λ , the same identity holds for penalized losses after replacing g_t by $g_t - \lambda$. This is a comparison on fixed states: summing it does not give the loss of an alternative generated trajectory. Huber regression is a surrogate and does not directly minimize this excess loss.

Reference benefit and distribution disagreement. KL divergence $D_{\text{KL}}(p_t^F \| p_t^L)$ averages $\log p_t^F(Y) - \log p_t^L(Y)$ over $Y \sim p_t^F$. It therefore measures expected gain under Full’s predictive distribution, whereas g_t evaluates the reference next token. Exact current-step KL also requires executing Full, so it is an offline diagnostic.

A.2 RECALL-HEAD ARCHITECTURE

For Qwen3-1.7B, each of the three 2,048-dimensional inputs passes through an independent RMSNorm (Zhang & Sennrich, 2019), a biased 2048 $\rightarrow$ 1024 projection, and SiLU. For tower outputs $a, b, c \in \mathbb{R}^{1024}$, the interaction vector is

$$u = [a; b; c; a \odot b; |a - b|; a \odot c; |a - c|; b \odot c; |b - c|] \in \mathbb{R}^{9216}. \quad (9)$$

A biased fusion projection gives

$$z_0 = \frac{1}{2} [a + b + c + \text{SiLU}(W_f u + b_f)], \quad (10)$$

with $W_f \in \mathbb{R}^{1024 \times 9216}$. Two pre-RMSNorm residual SwiGLU blocks (Shazeer, 2020) follow, each with bias-free 1024 $\rightarrow$ 2048 gate and up projections and a 2048 $\rightarrow$ 1024 down projection. A final RMSNorm and biased scalar projection produce q_t . The head has 28,325,889 parameters and uses FP32 weights and arithmetic. The backbone, embedding, and vocabulary projection remain frozen. Head training uses neither dropout nor weight decay.

A.3 PAIRED SUPERVISION AND HISTORICAL INPUTS

Branch computation. The access sets are defined in Equation 1, with $s = 4$ and $w = 2048$. They coincide through position 2,052; eligible supervision begins at position 2,053. Padding and packed-sequence boundaries prevent cross-sequence attention. For either branch,

$$(h_t^b, \Delta C_t^b) = F_\phi^b(x_t; C_{t-1}), \quad b \in \{L, F\}, \quad (11)$$

where h_t^b is the final normalized hidden state. The candidate update ΔC_t^b contains current-position KV at every attention layer and, for hybrid backbones, the native recurrent-state updates.

Training computes a Full trunk and two current-position counterfactuals. Both counterfactuals read the trunk’s historical state, while propagating their own current-position activations through the layers. Past attention uses $j < t$; each candidate’s current KV contribution is merged separately by online softmax. Neither counterfactual changes the trunk history used at later positions. The Full counterfactual and trunk are mathematically equivalent in exact arithmetic, but their different BF16 reduction paths can change small gain signs. The reported implementation therefore uses the separate Full counterfactual for the Full NLL target.

The frozen vocabulary projection supplies both reference-token NLLs. Vocabulary log-sum-exp is evaluated in chunks of 16 positions to avoid storing a sequence-by-vocabulary tensor. Eligibility requires valid current and next tokens, an unmasked reference label, consecutive position IDs within the same segment, and context length greater than 2,052. Backbone features and labels are computed without gradients.

Algorithm 2 One recall-head training update

Pretrained parameters ϕ are frozen; only R_ψ is trained.

Require: Token batch X , Full-call penalty λ , history threshold τ_{hist}

```

1:  $\mathcal{E} \leftarrow \text{ELIGIBLE}(X)$ 
2:  $(C^F, H^{\text{tr}}) \leftarrow \text{FULLTRUNK}(X)$ 
3:  $(H^L, H^F) \leftarrow \text{PAIR}(X, C^F)$ 
4:  $g \leftarrow \text{ACCESSGAIN}(H^L, H^F, X)$ 
5:  $H^{\text{train}} \leftarrow \text{SELECT}(H^L, H^{\text{tr}}, g, \tau_{\text{hist}})$ 
6:  $H^- \leftarrow \text{SHIFT}(H^{\text{train}})$ 
7: for  $t \in \mathcal{E}$  do
8:    $q_t \leftarrow R_\psi(H_t^-, E_\phi(x_t), h_t^L)$ 
9:    $y_t \leftarrow T(g_t - \lambda)$ 
10: end for
11:  $\mathcal{L} \leftarrow \text{HUBERREDUCE}(q, y, \mathcal{E})$ 
12: Update  $\psi$  using  $\nabla_\psi \mathcal{L}$ 
```

PAIR computes both candidates from the Full-trunk history. SELECT uses H^L at eligible positions with $g_t < \tau_{\text{hist}}$, and H^{tr} otherwise. SHIFT moves the selected states one position forward within each sequence, using zero at its start. HUBERREDUCE applies Equation 6, using the configuration-specific reduction and empty-batch handling in Appendix A.4.

Previous hidden state during training. With eligibility indicator m_t , the preceding-state input is constructed from the selected training states

$$h_t^{\text{train}} = \begin{cases} h_t^{L, \text{cf}}, & m_t = 1 \text{ and } g_t < \tau_{\text{hist}}, \\ h_t^{F, \text{trunk}}, & \text{otherwise.} \end{cases} \quad (12)$$

These states are detached and shifted within each sequence, so the head at t receives h_{t-1}^{train} , corresponding to H_t^- in Algorithm 2. The input is zero at each segment start. The Full branch of this feature uses the trunk hidden state; the Full counterfactual is used for the gain target. This selection does not alter training KV. Because g_{t-1} is measured on the already observed x_t , it does not depend on the current reference target x_{t+1} . It nevertheless requires both preceding predictions, whereas deployment uses the branch actually selected by the head. Training and deployment therefore differ in both historical-state construction and preceding-state selection.

Prefill handoff. For prompt $x_{1:m}$, Full prefill commits C_m , sets $h_m = h_m^F$, and produces the first output x_{m+1} . The first routed step consumes this token with (C_m, h_m) and produces x_{m+2} . Consequently, N generated outputs contain $N - 1$ routed steps. All reported routing counts exclude the output supplied directly by prefill.

A.4 REGRESSION TARGET AND REDUCTION

For residual $e = q_t - y_t$, the loss is

$$\ell_{\text{Huber},1}(e) = \begin{cases} \frac{1}{2}e^2, & |e| \leq 1, \\ |e| - \frac{1}{2}, & |e| > 1. \end{cases} \quad (13)$$

All eligible gains, including near-zero values, are retained. There is no gain-dependent weighting or auxiliary sign-classification loss. The primary Qwen3-1.7B configuration averages the distributed eligible-token means of its accumulated microbatches. The input ablations and Qwen3.5-2B training instead divide the summed losses by the total eligible-token count over the entire optimizer update. For accumulated microbatch sets $\mathcal{E}_j$ pooled across data-parallel workers, these reductions are, respectively,

$$\begin{aligned} \mathcal{L}_{\text{micro}} &= \frac{1}{M} \sum_{j=1}^M \frac{\sum_{t \in \mathcal{E}_j} \ell_t}{|\mathcal{E}_j|}, \\ \mathcal{L}_{\text{step}} &= \frac{\sum_{j=1}^M \sum_{t \in \mathcal{E}_j} \ell_t}{\sum_{j=1}^M |\mathcal{E}_j|}, \end{aligned} \quad (14)$$

shown for nonempty microbatches. They need not agree when eligible-token counts differ. In the step-normalized implementation, empty microbatches contribute zero and an entirely empty update is skipped. Training settings for the input ablation are recorded in Appendix B.5; model-specific evaluation settings are given in Appendix B.1.

The Qwen3-1.7B head used for RULER16K uses $\lambda = 0$ and $\tau_{\text{hist}} = 0.001$; its LongBench head uses $\lambda = 0$ and $\tau_{\text{hist}} = 0$. The Qwen3.5-2B head and input ablations use $\lambda = 0.001$ and $\tau_{\text{hist}} = 0$. The Full-call penalty is expressed on the NLL scale and is not a measured hardware cost. The history threshold and deployment score threshold are separate parameters. Although the signed-log transform is invertible, Huber regression on a transformed target does not make its inverse an estimate of the conditional mean raw gain. We use q_t as a regression score, without interpreting it as a probability or calibrated NLL benefit.

A.5 SELECTED-STATE EXECUTION

Let $b_t = F$ when $q_t > \theta$ and $b_t = L$ otherwise; nonfinite scores fall back to Full. The selected branch determines all committed outputs:

$$\begin{aligned} h_t &= h_t^{b_t}, & p_t &= \text{softmax}(W_{\text{LM}} h_t), \\ C_t &= C_{t-1} \parallel \Delta C_t^{b_t}. \end{aligned} \tag{15}$$

The operator $\parallel$ appends the selected current KV and applies any recurrent-state updates. The same h_t becomes the preceding hidden input at the next step; it is updated after Local as well as Full selections. Candidate state remains uncommitted until the action is final. Only the selected hidden passes through the vocabulary projection at deployment. Full recall reads the history produced by ODA’s actual actions, without reconstructing an Always-Full trajectory.

Complete history and Local workspace. The Qwen3 runtime measured in Figure 1(b,c) retains native FlashAttention over the paged complete KV cache. Local reads a persistent ring workspace containing the same selected history within its access range. For $s = 4$ and $w = 2,048$ (including the current token), it holds at most 2,051 committed positions: four initial positions in dedicated slots and 2,047 recent positions in a ring. The current Local candidate KV is supplied separately and remains uncommitted until selection, preserving the pre-step history for either branch. Advancing the ring replaces its oldest recent entry; the complete paged cache retains that entry for later Full access, so total KV storage grows with context. Queries and keys use their original absolute positions for rotary encoding. Ring wraparound changes physical storage slots while preserving token positions and cached key encodings.

Conditional execution and fused commitment. Local, the actual FP32 recall head, conditional Full, and commitment run inside device-side CUDA Graphs. Four captured stages—Local plus the head, Full, Local commitment, and Full commitment—form two mutually exclusive branches after scoring. Each step uses one top-level graph launch, which executes multiple kernels. The device predicate applies the score threshold and nonfinite fallback, so routing requires no per-token host score read. A Full retry reads the same preceding committed KV as Local. If Local is selected, one fused kernel writes its current KV across all layers to both the paged cache and the appropriate Local slots. If Full is selected, native Full has already written its current paged KV; the fused update copies the Full candidate into the Local workspace without writing the paged cache a second time. Unselected scratch is overwritten by the next Local attempt. Thus, both history views advance with the same selected candidate once per step. Updating the selected hidden state and advancing the position are separate graph operations. The common engine output path projects and samples once outside this conditional graph; engine scheduling and CPU sequence bookkeeping remain part of decoding.

Length-compatible graph reuse. In the measured vLLM 0.18 Qwen3-1.7B implementation, conditional graph groups are keyed by $\lceil L/128 \rceil$, where L is the effective attention length including the current token. Each group is captured at an actual length in its interval. For the pinned FlashAttention backend and model shape, the KV block count, split plan, and rounded length are compatible throughout that interval. Replay updates the device-side effective length and current cache position. Reuse also checks model parameters, the routing threshold, input and metadata tensor addresses

and layouts, and the attention backend; using the engine’s maximum capacity as a universal capture length would not preserve the same attention reduction plan.

Crossing an interval boundary transfers the preceding selected hidden state and routing counters on the GPU. Capture and warm-up save and restore the current paged slot, ring slot, hidden state, and counters, so trial executions do not advance the committed history. This rollback is confined to graph construction; ordinary replay updates only the current selected state. Each new request initializes its own history and head state; reusing workspaces or compatible graphs does not reuse the previous request’s history. In tensor-parallel execution, graph capture uses the vLLM TP-group context and registers custom-allreduce buffers for graph replay. The warm-up and timing protocol is given in Appendix B.7.

When Local and Full have identical access sets, the Transformers implementation can reuse the Local result for a logical Full action. The distinct-range cost model assumes $n > s + w$.

Direct-ring Local implementation. Local attention uses two Triton kernels that directly read ring KV. The first processes blocks of 16 logical positions, maps query heads to KV heads for GQA, and computes block maxima, exponential sums, and weighted values in FP32. The second combines these partial results with stable softmax rescaling and casts the output to BF16. Persistent per-layer scratch buffers support up to 129 blocks, avoiding repeated allocation, window gathering, and KV-head replication. GPU position tensors determine ring addresses at replay time.

The standalone Local reference uses the same attention kernels with a single graph for embedding, the Local backbone, and ring commitment. It has no recall head or complete paged history after Full prefill. Its execution costs therefore differ from forcing zero Full calls in ODA.

Hybrid recurrent state. For Qwen3.5-2B, Local restricts only the six ordinary attention layers, at zero-based indices 3, 7, 11, 15, 19, and 23. The remaining 18 Gated DeltaNet layers retain their native computation. Before Local, the runtime saves convolution and recurrent states; before a Full retry, it restores the pre-step state. Only the selected updates are committed. Native precision uses BF16 backbone, KV, and convolution state, with FP32 recurrent state. These state transactions are necessary for recomputation from the same history; the Qwen3 timing results do not establish a speedup for this hybrid implementation.

A.6 COST OF CONDITIONAL RECOMPUTATION

Let B be history-independent backbone cost, $A(n)$ attention cost at history length n , R recall-head cost, and O the shared output cost. Let D_F and D_{ODA} denote execution overheads. For a fixed Local range $\ell = s + w$ and recall rate ρ , an additive timing model is

$$T_F(n) = B + A(n) + O + D_F, \quad (16)$$

$$T_{ODA}(n, \rho) = B + A(\ell) + R + \rho[B + A(n)] + O + D_{ODA}. \quad (17)$$

The Local attempt is paid at every step, including recalled steps, while the output projection is paid only once. This model assumes no reused backbone prefix and comparable branch kernels; measured branch times can replace the shared B , A approximation.

Writing $H = R + D_{ODA} - D_F$, acceleration requires

$$\rho < \frac{A(n) - A(\ell) - H}{B + A(n)}. \quad (18)$$

For $A(n) = an$, $a > 0$, and $\rho < 1$, this becomes $n > [\rho B + a\ell + H]/[(1 - \rho)a]$. The ratio approaches $1/\rho$ only when global-attention cost dominates all other terms. Thus, a 12.5% recall rate does not imply an $8\times$ finite-context speedup, and a fixed positive recall rate retains $O(n)$ expected attention cost per decoding step.

For an actual continuation, costs must be summed over its history lengths n_t and recall indicators a_t :

$$T_{ODA} = \sum_t [B_t + A(\ell_t) + R_t + a_t(B_t + A(n_t)) + O_t + D_{ODA,t}]. \quad (19)$$

The timing of recall matters through the lengths n_t , not only its frequency. Similarly, total attended positions count both Local reads and any additional Full reads. Neither total traffic nor throughput

can be inferred from $1 - \rho$ alone. The FLOPs measurements in Appendix B.7 use the actual model shapes and call schedules.

B ADDITIONAL EXPERIMENTS AND EVALUATION PROTOCOLS

B.1 TRAINING AND EVALUATION SETTINGS

Training runs. The recall heads are trained with frozen backbones. Qwen heads use model-tokenized versions of a content-deduplicated long-context SFT corpus derived from Step-3.5-Flash-SFT (StepFun, 2026). The training pool contains 196,608 examples with maximum length 16,384; development and test splits each contain 8,192 examples. Pool size is not the number of distinct examples consumed during a training run. The main-table operating points are separate, model-specific runs. The Qwen3-1.7B head used for the RULER16K main result is also used for the five-task Random control and the fixed-reference diagnostics. Its LongBench main result uses a separate head. These trained heads are reported as measured operating points rather than selected by an independent validation rule. The primary Qwen3-1.7B training configuration and measured resource consumption are detailed in Appendix B.8.

Generation protocol. RULER16K uses 13 tasks with 100 examples each. LongBench v1 is the ten-task, 1,950-example evaluation under a 40,960-token input budget, rather than the full LongBench collection. Scores follow each task’s official metric and are macro-averaged within each benchmark. The reported NPU evaluations use greedy decoding with thinking disabled, Full pre-fill, and a 512-token output cap. Each policy advances its own generated continuation and selected cache. StreamingLLM and ODA’s Local branch use four initial positions and a 2,048-token recent window including the current position. In hybrid backbones, the restriction applies only to layers that otherwise read the full history; native local or Gated DeltaNet layers retain their own computation.

Full-call rates and aggregation. Full-call rate is the fraction of routed decoding steps assigned to Full, excluding the first output produced by prefill. For task d , let F_d and N_d be the Full-decision and routed-step counts summed across its examples, giving $\rho_d = F_d/N_d$. Across D tasks, we distinguish

$$\rho_{\text{pooled}} = \frac{\sum_d F_d}{\sum_d N_d}, \quad \rho_{\text{task}} = \frac{1}{D} \sum_d \rho_d.$$

The pooled rate weights tasks by routed-step count; the task-averaged rate weights tasks equally. RULER main-table rates at each length, input ablations, and training-duration comparisons use the pooled rate. RULER’s Avg averages the five length-specific rates equally. LongBench and the five-task ODA–Random comparison use the task-averaged rate. Random means and standard deviations are computed across seed-level statistics, as detailed in Appendix B.4. Individual trajectory rates use that trajectory’s Full-decision and routed-step counts. Runtime experiments use prescribed Full-call rates over a fixed continuation, such as $126/1008 = 12.5\%$. The offline selection budget in fixed-reference diagnostics instead specifies the fraction of reference positions selected for access; it is distinct from a free-generation Full-call rate.

Evaluation cohorts and source precision. The Qwen3-1.7B RULER16K point uses a GPU evaluation, together with Full and StreamingLLM from the same evaluation cohort. The remaining main-table points use NPU evaluations. RULER benchmark scores and Full-call rates at 4k, 8k, 32k, and 64k are transcribed from the original result tables at two-decimal precision for all five models and three methods. The five-length averages combine these values with the higher-precision 16k records. Qwen3-1.7B uses a different recall head for its 16k main-table point than for the other RULER lengths. Its five-length Avg therefore combines distinct operating points and is descriptive. The other models each use the same recall head and fixed threshold across RULER lengths. In particular, the 32k–64k comparisons use an unchanged head and threshold within each model. Qwen3-8B and Qwen3.5-27B share heads across the two benchmarks; Qwen3-1.7B and Gemma use benchmark-specific heads. The supplemental Qwen3.5 LongBench ODA task scores and Full-call rates are transcribed from the original result tables at two-decimal precision. Gemma’s Long-

Bench Full and StreamingLLM references use batch 2, while the ODA run uses batch 1. Its score differences are therefore descriptive cross-batch comparisons.

B.2 ADDITIONAL TOKEN-LEVEL GENERATION TRAJECTORIES

Figures 4 and 5 extend Figure 2 with four examples from the same frozen Qwen3-1.7B head used for the RULER16K main result, at threshold zero. All examples use greedy decoding, thinking disabled, and a 512-token output cap. RULER examples come from the recorded RULER16K rerun; QMSum and MultiNews are qualitative replays with the same frozen head and runtime; the LongBench main table uses a separately trained head. Archived uninstrumented replay checks reproduce generated token IDs and native routing counts for both MultiNews cases.

Pink, blue, and gray denote recorded Full decisions, Local decisions, and the initial token produced by prefill. Orange underlines mark reference answers in RULER or manually selected source-linked summary details. The main RULER panel shows the complete visible answer without its termination token; the QMSum panel shows the first 85 tokens, ending at a sentence boundary. Full-rate denominators exclude the prefill token. Complete-trace counts include the termination token; the panels separately report the counts for the displayed output. These selected examples describe observed allocation and its variation across outputs, without establishing that Full was necessary at each marked position.

(a) RULER variable tracking

Example 7 | Input: 16,218 tokens
Overall Full: 24/79 routed (30.4%)
Shown Full: 24/78 routed
Full visible output; EOS omitted

Based on the chain of variable assignment in the text above, the variables assigned the value **65591** are:

1. **FWXMB**
2. **BYX0A**
3. **YIYPT**
4. **SKCEG**
5. **VKXIT**

These variables are assigned the value **65591** in the text.

(b) RULER multi-query

Example 3 | Input: 16,144 tokens
Overall Full: 64/115 routed (55.7%)
Shown Full: 64/114 routed
Full visible output; EOS omitted

The special magic numbers mentioned in the provided text for the following categories are:

1. **Productive-kitsch**:
- **7705062**
2. **Tranquil-investment**:
- **1093026**
3. **Clever-spit**:
- **3475836**
4. **Fresh-secretariat**:
- **8132769**

These numbers are highlighted in the text as special magic numbers that are relevant to the respective categories.

Full Local prefill answer / source detail

Figure 4: **Additional token-level access allocation on RULER16K.** (a) Variable tracking, example 7: all 16 tokens overlapping the five underlined reference variable names use Full, while the complete trajectory uses Full at 24 of 79 routed positions (30.4%). (b) Multi-query retrieval, example 3: all 28 tokens overlapping the four underlined reference numbers use Full, while the complete trajectory uses Full at 64 of 115 routed positions (55.7%). Both panels show the complete visible output with the termination token omitted. Local handles many positions in the surrounding explanation and list syntax.

(a) MultiNews: Occupy protests

Example 0 | Input: 2,703 tokens
Overall Full: 299/430 routed (69.5%)
Shown Full: 150/173 routed
Opening excerpt: 174 generated tokens

****Summary:****

The news highlights ongoing protests in several major cities, including Philadelphia, Los Angeles, and others, as Occupy movements continue to challenge the status quo and demand economic justice. In Philadelphia, Occupy Philadelphia members remained on site at City Hall into the evening of November 28, despite a deadline for their departure. The group, which includes homeless individuals and activists, continued to protest against corporate greed and government inaction. Police, however, did not evict the protesters, and city officials expressed a willingness to work with the movement. The protesters, who had set up a camp on Dilworth Plaza, were seen serving food, chanting slogans, and engaging in peaceful demonstrations. The city had plans to renovate the area, including the SEPTA tunnels and the addition of a cafe and ice rink, but the protesters were still seeking a new location.

(b) MultiNews: Ellen Pao

Example 5 | Input: 1,439 tokens
Overall Full: 240/391 routed (61.4%)
Shown Full: 74/124 routed
Opening excerpt: 125 generated tokens

****Summary:****

The venture capital firm Kleiner, Perkins, Caufield and Byers (KPCB) is seeking approximately \$973,000 in legal costs from former partner Ellen Pao, who lost a high-profile gender discrimination case against the firm. The case, which garnered significant attention in Silicon Valley, involved Pao claiming that KPCB retaliated against her for her gender, leading to a decline in her career. A jury found in favor of KPCB in March, clearing the firm of liability, and the case sparked a broader discussion about gender diversity in the tech industry.

Full Local prefill answer / source detail

Figure 5: **Variation in token-level access allocation within MultiNews.** Both panels show contiguous opening paragraphs from qualitative summary replays. **(a)** Occupy protests, example 0: the first 174 generated tokens contain 150 Full calls over 173 routed positions; the complete trajectory uses 299/430 (69.5%). Full is selected for 11 of 12 tokens overlapping the underlined source-linked details. **(b)** Ellen Pao case, example 5: the first 125 generated tokens contain 74 Full calls over 124 routed positions; the complete trajectory uses 240/391 (61.4%). Only 4 of 25 tokens overlapping the marked entities and figures use Full. This example starts with 1,439 input tokens and reaches a maximum context of 1,830 tokens, so its complete history fits within the 2,048-token Local window. It illustrates recorded routing when the complete history is locally available.

B.3 PER-TASK GENERATION RESULTS

The following tables give per-task scores for each completed main-table operating point, with evaluation settings given in Appendix B.1. LongBench uses the same ten tasks and order as its main table. Each table pairs Full and StreamingLLM with ODA for the same model and task set. The overall ODA Full-call rate appears after Avg in smaller indigo type. LongBench appendix averages and rates therefore match the main table. The Qwen3-1.7B and Qwen3-8B LongBench per-task Full-call rates were supplied from their batch-2 run records to two decimal places. Task scores and benchmark averages are displayed to two decimal places. Averages use the full stored precision where available. For the supplemental Qwen3.5 LongBench ODA results, task scores and Full-call rates are available only to two decimal places, and the reported averages are computed from those supplied values.

Table 4: Qwen3-1.7B RULER16K per-task scores.

Task	Full	StreamingLLM	ODA
cwe	12.00	25.80	14.90
fwe	84.00	70.33	84.00
niah_multikey_1	99.00	17.00	100.00
niah_multikey_2	89.00	10.00	88.00
niah_multikey_3	90.00	2.00	82.00
niah_multiquery	98.25	14.75	97.25
niah_multivalue	97.00	14.75	94.50
niah_single_1	100.00	12.00	100.00
niah_single_2	100.00	18.00	100.00
niah_single_3	100.00	11.00	100.00
qa_hotpotqa	37.00	18.00	34.00
qa_squad	60.00	21.00	61.00
vt	99.00	15.40	99.60
Avg	81.94	19.23	81.17 (41.64%)

Table 5: Qwen3-8B RULER16K per-task scores.

Task	Full	StreamingLLM	ODA
cwe	91.40	46.90	88.90
fwe	94.00	86.00	93.00
niah_multikey_1	99.00	17.00	99.00
niah_multikey_2	98.00	10.00	99.00
niah_multikey_3	98.00	5.00	95.00
niah_multiquery	100.00	14.50	99.75
niah_multivalue	100.00	12.50	99.75
niah_single_1	100.00	12.00	100.00
niah_single_2	100.00	18.00	100.00
niah_single_3	100.00	12.00	100.00
qa_hotpotqa	53.00	40.00	50.00
qa_squad	79.00	41.00	79.00
vt	96.40	16.00	93.20
Avg	92.98	25.45	92.05 (54.17%)

Table 6: Qwen3.5-2B RULER16K per-task scores.

Task	Full	StreamingLLM	ODA
cwe	97.00	84.40	97.60
fwe	100.00	92.00	99.33
niah_multikey_1	100.00	17.00	100.00
niah_multikey_2	100.00	13.00	100.00
niah_multikey_3	100.00	5.00	99.00
niah_multiquery	100.00	14.75	100.00
niah_multivalue	100.00	15.00	98.00
niah_single_1	100.00	16.00	100.00
niah_single_2	100.00	18.00	100.00
niah_single_3	100.00	13.00	100.00
qa_hotpotqa	51.00	24.00	51.00
qa_squad	78.00	31.00	78.00
vt	100.00	24.40	100.00
Avg	94.31	28.27	94.07 (44.06%)

Table 7: Qwen3.5-27B RULER16K per-task scores.

Task	Full	StreamingLLM	ODA
cwe	77.10	82.00	100.00
fwe	99.67	89.33	99.67
niah_multikey_1	100.00	18.00	99.00
niah_multikey_2	100.00	16.00	100.00
niah_multikey_3	100.00	5.00	99.00
niah_multiquery	100.00	12.50	93.25
niah_multivalue	100.00	12.00	87.75
niah_single_1	100.00	16.00	100.00
niah_single_2	100.00	16.00	100.00
niah_single_3	100.00	13.00	100.00
qa_hotpotqa	74.00	54.00	73.00
qa_squad	96.00	67.00	94.00
vt	100.00	6.80	99.60
Avg	95.91	31.36	95.79 (29.47%)

Table 8: Gemma-4-12B-it RULER16K per-task scores.

Task	Full	StreamingLLM	ODA
cwe	99.80	90.50	99.80
fwe	99.67	80.33	99.67
niah_multikey_1	100.00	18.00	100.00
niah_multikey_2	100.00	15.00	100.00
niah_multikey_3	100.00	5.00	99.00
niah_multiquery	100.00	15.25	99.00
niah_multivalue	99.50	6.00	94.75
niah_single_1	100.00	16.00	100.00
niah_single_2	100.00	16.00	100.00
niah_single_3	100.00	13.00	100.00
qa_hotpotqa	70.00	46.00	70.00
qa_squad	91.00	51.00	91.00
vt	96.00	18.80	96.40
Avg	96.61	30.07	96.12 (67.50%)

Table 9: Qwen3-1.7B LongBench v1 per-task scores.

Task	Full	StreamingLLM	ODA
qasper	37.34	31.69	36.84
multifieldqa_en	46.78	30.42	45.67
multifieldqa_zh	55.29	39.39	54.99
2wikimqa	34.62	29.46	34.59
hotpotqa	39.60	31.10	40.00
musique	16.06	8.36	16.28
dureader	32.42	17.75	31.61
qmsum	22.76	20.92	22.47
vcsum	15.15	13.52	14.87
passage_retrieval_zh	95.00	48.00	94.67
Avg	39.50	27.06	39.20 (80.12%)

Table 10: Qwen3-8B LongBench v1 per-task scores.

Task	Full	StreamingLLM	ODA
qasper	46.08	37.59	45.96
multifieldqa_en	54.13	37.30	53.83
multifieldqa_zh	62.55	45.74	62.55
2wikimqa	40.79	33.55	40.78
hotpotqa	56.76	45.91	56.77
musique	32.08	21.67	31.89
dureader	26.78	17.68	26.62
qmsum	24.19	21.53	24.03
vcsum	13.94	14.20	14.05
passage_retrieval_zh	97.50	49.50	97.50
Avg	45.48	32.47	45.40 (88.35%)

Table 11: Qwen3.5-2B LongBench v1 per-task scores.

Task	Full	StreamingLLM	ODA
qasper	39.63	32.56	39.21
multifieldqa_en	52.06	34.55	51.75
multifieldqa_zh	61.61	44.04	61.72
2wikimqa	34.63	29.98	34.63
hotpotqa	48.15	36.21	48.14
musique	31.92	17.64	32.29
dureader	27.97	16.17	28.65
qmsum	22.07	19.95	21.87
vcsum	13.13	11.87	12.73
passage_retrieval_zh	84.50	50.50	84.50
Avg	41.57	29.35	41.55 (82.23%)

Table 12: Qwen3.5-27B LongBench v1 per-task scores.

Task	Full	StreamingLLM	ODA
qasper	47.63	41.36	47.18
multifieldqa_en	55.24	40.28	55.02
multifieldqa_zh	64.73	53.37	64.89
2wikimqa	66.79	64.01	66.70
hotpotqa	67.58	58.73	67.65
musique	55.71	47.17	55.75
dureader	24.07	16.27	23.29
qmsum	22.23	19.72	22.13
vcsum	13.11	12.45	12.94
passage_retrieval_zh	100.00	98.00	100.00
Avg	51.71	45.14	51.55 (53.07%)

Table 13: Gemma-4-12B-it LongBench v1 per-task scores.

Task	Full	StreamingLLM	ODA
qasper	48.06	41.81	48.23
multifieldqa_en	58.14	42.83	56.63
multifieldqa_zh	66.62	51.71	65.61
2wikimqa	65.50	60.68	65.68
hotpotqa	63.70	54.02	63.74
musique	46.59	33.47	46.01
dureader	27.18	16.68	25.87
qmsum	24.22	20.85	24.14
vcsum	14.72	13.45	14.26
passage_retrieval_zh	100.00	98.50	99.50
Avg	51.47	43.40	50.97 (58.65%)

B.4 RANDOM AND LEARNED GLOBAL ACCESS

Common evaluation. The Qwen3-1.7B head from the RULER16K main result is evaluated on NIAH Single, NIAH Multikey, variable tracking, frequent-word extraction, and QA SQuAD, with the same 100 examples per task across policies. This is a separate NPU evaluation with batch size one, a BF16 backbone, an FP32 head, greedy decoding, and thinking disabled. Full prefill, the Local range, and selected-state commitment are shared. Full and StreamingLLM are reevaluated under this setup, scoring 88.626 and 27.214 on the five-task macro.

Random control. ODA uses thresholds $-0.01, -0.005, -0.001, 0, 0.001, 0.005, 0.01, 0.05$. For each threshold and task d , Random uses the unrounded observed ODA Full rate ρ_d^{ODA} as its Bernoulli probability at each routed step, with seeds 42, 43, and 44. Both policies then follow their own generated trajectories. This controls the task-specific target frequency, without guaranteeing identical realized rates. No reference answer selects Random’s individual actions.

Both plotted coordinates average the five tasks equally. Each Random seed first supplies a task-averaged score and Full-call rate; reported means and error bars are their means and sample standard deviations over the three routing seeds. They do not measure prompt or training-seed uncertainty. At threshold zero, the plotted task-averaged Full-call rates are 41.33% for ODA and 40.99% for Random. The corresponding pooled Full-call rates are 36.86% and 36.06%, respectively. Random’s pooled rate is computed separately within each seed and then averaged across the three seeds; counts are not pooled across seeds.

Table 14: Learned and random access for eight ODA thresholds. Random entries are means $\pm$ sample standard deviations across three routing seeds. Scores and realized Full-call rates are averaged across tasks.

Threshold	ODA score	ODA Full (%)	Random score	Random Full (%)
-0.01	89.05	58.29	35.75 ± 0.86	58.03 ± 0.33
-0.005	88.95	47.09	33.56 ± 0.65	46.61 ± 0.14
-0.001	89.32	42.12	32.90 ± 1.03	41.72 ± 0.21
0	88.96	41.33	32.79 ± 0.95	40.99 ± 0.09
0.001	89.09	40.57	32.64 ± 0.81	40.28 ± 0.19
0.005	88.99	37.82	32.34 ± 0.29	37.47 ± 0.13
0.01	88.88	36.13	32.32 ± 0.19	35.88 ± 0.17
0.05	85.17	24.85	30.25 ± 0.95	24.81 ± 0.55

Table 15: Per-task scores at ODA threshold zero. Parentheses report actual Full-call percentages; Random entries average three routing seeds.

Task	Full	StreamingLLM	ODA (Full%)	Random (Full%)
NIAH Single	100.00	12.00	100.00 (31.04%)	12.00 (30.92%)
NIAH Multikey	98.00	17.00	99.00 (38.26%)	17.67 (38.32%)
Variable tracking	98.80	15.40	99.80 (33.62%)	16.60 (33.60%)
Frequent words	84.33	70.67	83.00 (42.58%)	76.67 (42.20%)
QA SQuAD	62.00	21.00	63.00 (61.15%)	41.00 (59.89%)

All 170 task runs are retained: 40 ODA, 120 Random, five Full, and five StreamingLLM runs, covering 17,000 generations. Eight Random task runs depart from the target rate by more than two percentage points, all on QA SQuAD; the maximum is 3.71 points. Output-cap hits are 9/4,000 for ODA, 75/12,000 for Random, 1/500 for Full, and 2/500 for StreamingLLM. Thus, the observed score gap includes the effects of routing on generation length and termination. Runner elapsed times are not used as optimized-vLLM measurements.

B.5 INPUT COMPOSITION AND TRAINING BEHAVIOR

Input subsets. Seven heads use subsets of the preceding selected hidden state (H), current token embedding (E), and current Local hidden state (L). This ablation series uses a separate training

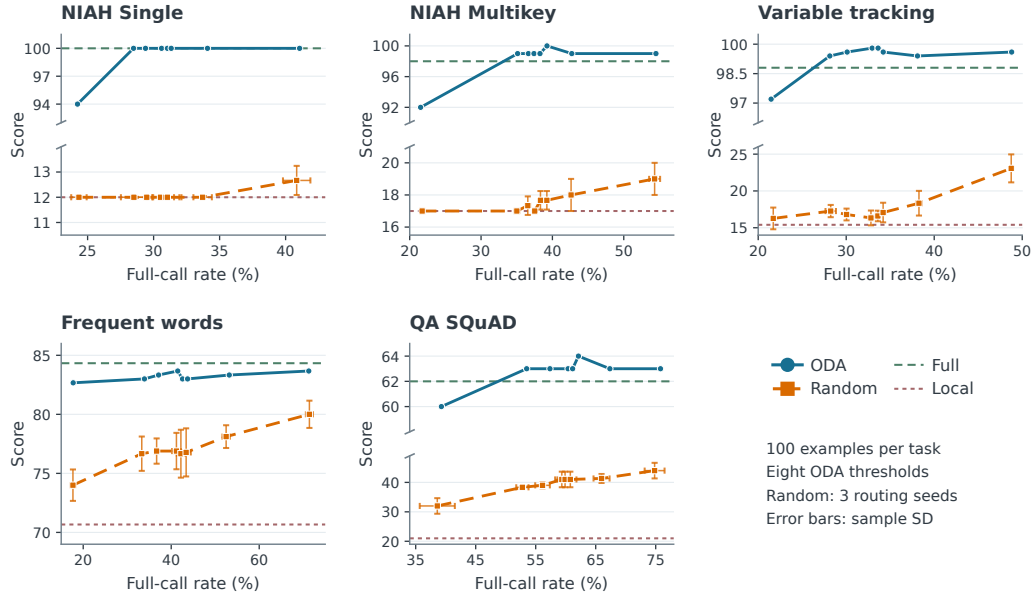


Figure 6: **Learned and random access across individual tasks.** Random error bars show standard deviations across three routing seeds on both axes. Panels use task-specific axis ranges; vertical axes are broken except for frequent-word extraction.

configuration from the primary head in Table 1. All start from the same seed-42 initialization and retain the same 28,325,889-parameter architecture. Missing streams are filled by the first available input in H, E, L order: $H \mapsto (H, H, H)$, $E \mapsto (E, E, E)$, $L \mapsto (L, L, L)$, $HE \mapsto (H, E, H)$, $HL \mapsto (H, H, L)$, $EL \mapsto (E, E, L)$, and $HEL \mapsto (H, E, L)$. Each head is trained separately and every policy computes Local before routing. In particular, the L -only head can request Full and is distinct from the fixed StreamingLLM baseline.

All seven input-ablation heads use a frozen BF16 backbone, an FP32 head, eight-way data parallelism, global batch 64, microbatch one per device, and eight accumulation steps. Training uses AdamW (Loshchilov & Hutter, 2019), peak learning rate 3×10^{-4} , a 102-step warm-up followed by cosine decay, gradient clipping at 1.0, and zero head dropout and weight decay. Their cost penalty is $\lambda = 0.001$ and history threshold is $\tau_{\text{hist}} = 0$. Evaluation uses Transformers SDPA, batch size two, greedy decoding, Full prefill, and at most 512 outputs on the same 13 RULER16K tasks, with 100 examples per task. Every trained head uses threshold zero. Since the resulting Full rates differ, these comparisons measure the learned policies’ natural operating points; they do not isolate an input’s contribution at equal access frequency.

Table 3 reports these seven input configurations after 1,024 training updates. Each configuration has one training trajectory with the shared initialization seed.

The complete $H + E + L$ run continues with the same optimizer, schedule, random state, and data order. Its Full rate falls from 76.22% at update 1,024 to 50.11% at 2,048, then rises to 71.43% at 3,072, while its scores remain between 81.33 and 81.57. Longer training does not monotonically improve this run’s quality–access trade-off.

Table 16: Effect of training updates on the complete $H + E + L$ head.

Updates	RULER16K	Full (%)	Full calls	Routed steps
1,024	81.57	76.22	60,848	79,829
2,048	81.33	50.11	40,634	81,083
3,072	81.36	71.43	59,098	82,739

Table 17: Benefit-sign discrimination on Qwen3-1.7B fixed-reference positions. Positive benefit is $g_t > 0$; subsets are defined by Local’s top-1 correctness. Intervals are 95% paired sequence-bootstrap intervals.

Subset	Positions	$g_t > 0$	Router AUROC [95% CI]	Entropy AUROC [95% CI]
All	2,048	52.0%	0.556 [0.502, 0.610]	0.534 [0.455, 0.618]
Local correct	1,373	52.4%	0.503 [0.445, 0.564]	0.593 [0.483, 0.689]
Local incorrect	675	51.1%	0.643 [0.577, 0.707]	0.486 [0.442, 0.526]

B.6 FIXED-REFERENCE QWEN3 DIAGNOSTICS

Collection. The Qwen3-1.7B head from the RULER16K main result is evaluated with CPU FP32/SDPA. Sixteen test sequences are chosen by fixed content-hash order, four in each length bucket with edges 4,096, 6,144, 8,192, 10,240, and 16,385. Each contributes one contiguous block of 128 supervised reference positions beyond the Local window. Selection does not use predictions or gains; the supplied content audit finds none of these sequences in train or dev. After Full prefill, reference tokens advance ODA’s selected history. Both current candidates start from the same saved state, and only the branch chosen by the head is committed. The reference token is fixed independently of that action. Observer-disabled replay matches the actions, selected top-1 tokens, and final KV digests on all 16 sequences.

Benefit ranking. Positive benefit is $g_t > 0$. Local-correct and Local-incorrect subsets are determined after evaluation from the Local top-1 prediction. They are not available to the policy. Table 17 compares the head with Local entropy. On the 675 Local-incorrect positions, the other scalar confidence rankings—negative maximum probability, negative probability margin, and negative top-two log-probability ratio—also have AUROCs between 0.486 and 0.491. Directions are fixed to rank lower-confidence positions first.

For offline budget b , each method selects its top $K = \lfloor b|\mathcal{S}| \rfloor$ positions within population $\mathcal{S}$. Net gain is $|\mathcal{S}|^{-1} \sum_{t \in \mathcal{A}} g_t$, including negative gains. Random’s expectation is $(K/|\mathcal{S}|)$ times the population mean gain; Oracle ranks by realized gain and uses information unavailable online. At 40% of all 2,048 positions, $K = 819$: ODA, Random, and Oracle capture 0.149978, 0.053385, and 0.227453 nats per position. The ODA–Random interval is [0.045747, 0.160134]. Intervals use 2,000 paired document-bootstrap resamples with seed 20260910, repeating selection within each resample.

Table 18 separates positive gains from negative costs. Across all positions, the head exceeds entropy in 40%-budget net gain, with difference interval [0.0315, 0.1388], although their AUROC and AP differences remain unresolved. Within Local-incorrect positions, the AUROC difference interval is [0.069, 0.230] and the net-gain difference interval is [0.1516, 0.5010]. Within Local-correct positions, both rankings have negative net gain. These are complete-head comparisons on fixed histories, rather than a confidence-controlled attribution to input L .

Table 18: Full–Local gain decomposition for Qwen3-1.7B. Each subset is ranked independently, selecting 40% of its positions. Positive gain and negative cost are sums in nats; mean net gain is normalized by the subset’s total number of reference positions.

Subset	Ranking	Calls	Positive gain	Negative cost	Mean net gain [95% CI]
All	Router	819	378.486	71.331	0.1500 [0.0679, 0.2497]
All	Entropy	819	283.170	149.730	0.0652 [0.0114, 0.1265]
Local correct	Router	549	10.253	23.822	−0.0099 [−0.0186, −0.0026]
Local correct	Entropy	549	19.336	40.529	−0.0154 [−0.0284, −0.0046]
Local incorrect	Router	270	378.419	50.544	0.4857 [0.2503, 0.7118]
Local incorrect	Entropy	270	163.380	52.520	0.1642 [0.0663, 0.2647]

Benefit is distinct from correctness. Of 2,048 positions, 1,342 are top-1 correct under both branches, 31 only under Local, 60 only under Full, and 615 under neither. Among the 1,342 both-correct positions, Full increases the reference probability at 718 and decreases it at 437; the remaining 187 gains are zero. Among the 675 Local-incorrect positions, 345 have positive gain but

only 60 become top-1 correct under Full. Local can therefore have a better immediate prediction even though Full has lower aggregate NLL.

Table 19 reports sign counts at several magnitude cutoffs. The cutoffs are descriptive, not validated numerical-noise bounds. Changing the positive label from $g_t > 0$ to $g_t > 0.001$ leaves the Local-incorrect AUROC and AP unchanged because that subset contains no gains in $(0, 0.001]$. The CPU precision and fixed-reference protocol are separate from the GPU free-generation evaluations.

Table 19: Reference-position counts at different NLL-gain thresholds for Qwen3-1.7B. Each row partitions the same 2,048 positions; ϵ is measured in nats.

ϵ	$g_t < -\epsilon$	$ g_t \leq \epsilon$	$g_t > \epsilon$
0	797	187	1,064
0.0001	649	632	767
0.001	594	788	666
0.01	503	1,012	533
0.1	313	1,419	316

B.7 RUNTIME PROTOCOL AND COMPLETE RESULTS

Environment and workload. The matrix uses vLLM 0.18.0, A100 GPUs, batch size one, and pipeline parallelism one. Backbone and KV are BF16; the recall head is FP32. The 4K–128K groups use one GPU (TP1), 256K uses two (TP2), and 512K uses four (TP4). All five methods within each length run on the same physical GPU group; speedups are normalized to that group’s native Full baseline. Thus, the longer-context points also change the hardware allocation. YaRN (Peng et al., 2024) uses factors 5, 9, and 17 with maximum sequence capacities of 139,264, 278,528, and 540,672 for the 4K–128K, 256K, and 512K groups, respectively. Each group’s methods share the same RoPE configuration. These extensions support timing and do not establish model quality at those lengths.

Each length uses one complete benchmark prompt, without repetition or concatenation: 4,139 tokens from ZeroSCROLLS Qasper (Shaham et al., 2023), 15,918 from LongBench v2 (Bai et al., 2025), 31,400 from LongBench v1 NarrativeQA (Bai et al., 2024), 63,852 from ZeroSCROLLS NarrativeQA, 128,852 from LooGLE long-dependency summarization (Li et al., 2024), and 261,696 and 516,788 from RULER multi-query and multi-key retrieval, respectively. Within each group, all methods share the prompt and a fixed 1,009-token continuation produced by Full. The recall head runs after every ODA Local attempt, but a device-side schedule selects Full for the first 2, 4, or 8 steps of every 16-step period. Over 1,008 routed steps, this gives 126, 252, or 504 Full calls, exactly 12.5%, 25%, or 50%. Nonfinite scores trigger Full and fail the count check. Native Full uses vLLM’s FULL_DECODE_ONLY CUDA Graph with compilation mode zero. Standalone Local uses its own whole-step graph, without a recall head or complete paged history after Full prefill; it is distinct from zero-call ODA.

Timing. Throughput is $1,008/(t_{1009} - t_1)$, where timestamps record when each output becomes available from the serial vLLM engine loop. It includes all layers, the head, conditional Full, state commitment, output projection, controlled output selection, sampling, and the engine loop. It excludes loading, tokenization, prefill and its first output, detokenization, and HTTP transport. Numerical observers are off. Each configuration runs one complete warm-up request to populate all relevant graphs and then three measured requests. Reported TPS is their median; speedup is the ratio of method and Full medians. Capture counters must remain unchanged during measured Local and ODA requests.

Major-operation FLOPs. Using the notation of Appendix A.6, with costs now counted in FLOPs, the ledger is

$$F_{\text{Full}} = \sum_t [B + A(n_t) + O], \quad (20)$$

$$F_{\text{Local}} = \sum_t [B + A(\ell_t) + O], \quad (21)$$

$$F_{\text{ODA}} = \sum_t [(1 + a_t)B + A(\ell_t) + a_t A(n_t) + R + O]. \quad (22)$$

The count includes MLP and QKV/output projections, both attention branches, the recall head, and one vocabulary projection. It uses actual model shapes, history lengths, and schedules. Attention FLOPs scale with query heads; KV bytes scale with KV heads. This is an analytical count of major operations, not measured hardware FLOPs or a latency prediction, and excludes tensor-parallel communication and execution-management costs. At 516,788 input tokens and 126 Full calls, the computation ratio is 6.375 and the measured warm throughput ratio is 2.650. The full matrix retains slowdowns at short contexts and larger recall budgets.

Numerical checks and scope. Implementation checks first compare the Local kernels with an independent FP32 materialized-window attention calculation on the same Q/K/V inputs. They then compare graph execution against eager execution with the same Local kernels, fixed continuation, and routing schedule. Logit checks require cosine similarity at least 0.999, KL at most 0.005, and top-1 agreement at least 0.99; repeated request resets must match exactly. These checks cover attention computation and selected-state execution, rather than equivalence to the Always-Full output distribution. The measurements isolate execution cost at controlled call schedules. Joint task quality and speed for the same learned policy, prefill-inclusive latency, peak memory, and multi-request batch scaling have not been measured.

Table 20: Runtime and major FLOPs for all 35 Qwen3-1.7B vLLM configurations. TP denotes the number of tensor-parallel GPUs. TPS is tokens/s, reported as the median of three requests after warm-up. Speedup and FLOPs savings use the corresponding native Full baseline.

Input tokens	TP	Method	Full (%)	TPS	Speedup	FLOPs saved (%)
4,139	1	Full	100.0	205.46	1.000×	0.00
4,139	1	Local	0.0	213.90	1.041×	13.19
4,139	1	ODA	12.5	178.52	0.869×	1.17
4,139	1	ODA	25.0	164.90	0.803×	-9.60
4,139	1	ODA	50.0	143.00	0.696×	-31.15
15,918	1	Full	100.0	177.30	1.000×	0.00
15,918	1	Local	0.0	214.27	1.209×	45.73
15,918	1	ODA	12.5	175.80	0.992×	33.53
15,918	1	ODA	25.0	159.46	0.899×	22.11
15,918	1	ODA	50.0	136.67	0.771×	-0.73
31,400	1	Full	100.0	148.31	1.000×	0.00
31,400	1	Local	0.0	214.21	1.444×	63.64
31,400	1	ODA	12.5	171.73	1.158×	51.34
31,400	1	ODA	25.0	153.73	1.037×	39.57
31,400	1	ODA	50.0	126.68	0.854×	16.01
63,852	1	Full	100.0	111.55	1.000×	0.00
63,852	1	Local	0.0	215.00	1.927×	78.51
63,852	1	ODA	12.5	163.84	1.469×	66.13
63,852	1	ODA	25.0	140.90	1.263×	54.06
63,852	1	ODA	50.0	111.37	0.998×	29.91
128,852	1	Full	100.0	75.27	1.000×	0.00
128,852	1	Local	0.0	214.45	2.849×	88.19
128,852	1	ODA	12.5	150.69	2.002×	75.75
128,852	1	ODA	25.0	123.74	1.644×	63.49
128,852	1	ODA	50.0	89.67	1.191×	38.96
261,696	2	Full	100.0	76.44	1.000×	0.00
261,696	2	Local	0.0	274.81	3.595×	93.85
261,696	2	ODA	12.5	174.00	2.276×	81.38
261,696	2	ODA	25.0	142.31	1.862×	69.00
261,696	2	ODA	50.0	98.87	1.293×	44.25
516,788	4	Full	100.0	77.64	1.000×	0.00
516,788	4	Local	0.0	342.63	4.413×	96.80
516,788	4	ODA	12.5	205.71	2.650×	84.31
516,788	4	ODA	25.0	158.02	2.035×	71.88
516,788	4	ODA	50.0	107.29	1.382×	47.01

B.8 PRIMARY QWEN3-1.7B TRAINING AND RESOURCES

Data and sampling. The primary run uses Step-3.5-Flash-SFT (StepFun, 2026) restricted to its `compiled/qwen3/general` subset. We retain complete records with 4,096–16,384 tokens, without truncation. Candidates are randomly ordered within four length bins, [4096, 6144), [6144, 8192), [8192, 10240), and [10240, 16385), using seed 20260721. After global exact-content SHA-256 deduplication and exclusion of the fixed development and test sets (8,192 records each), each bin contributes 49,152 records. The resulting 196,608-record dataset contains 1,663,312,927 non-padding input tokens. A dataset audit identifies 886,844,336 eligible supervision positions under the four-sink, 2,048-token-window configuration.

Optimization. The BF16 backbone remains frozen, and only the FP32 recall head’s 28,325,889 parameters are optimized. Training uses eight A100-SXM4-80GB GPUs with DDP, microbatch size two per GPU, and four accumulation steps, giving a global batch of 64. AdamW (Loshchilov & Hutter, 2019) uses zero weight decay, gradient-norm clipping at 1.0, and a learning rate that warms up for 102 updates to 3×10^{-4} and then remains constant through update 3,072. This run completes exactly one epoch; its configured cosine phase begins at the stopping boundary. The training seed is 20260827. Training uses FlexAttention with PyTorch 2.7.1, CUDA 12.6, and Triton 3.3.1. These settings describe the original primary run; the input-ablation configuration is reported separately in Appendix B.5.

Measured resources. Summing the recorded step times over all 3,072 updates gives 13.67 hours, or 109.34 GPU-hours across eight GPUs. The interval from the first startup log to the final checkpoint save is 13.75 hours, corresponding to an eight-GPU allocation of approximately 110 GPU-hours. These totals cover the complete one-epoch run, including frozen-backbone feature and paired-label computation; the primary RULER16K result uses the head after 1,024 updates. Data preparation, preliminary experiments, other training runs, and downstream evaluation are excluded.